

EE359 – Lecture 3 Outline

- **Announcements**

- HW posted, due Fri 4pm (clarification on prob. 4, 2D optimization)
- Discussion section starts Wed, 4-5pm, 364 Packard
- TA OHs start this week

- **Log Normal Shadowing**

- **Combined Path Loss and Shadowing**

- **Outage Probability**


- **Model Parameters from Measurements**

- **Statistical Multipath Model**

Lecture 2 Review

- **Propagation Characteristics**
 - Path loss, shadowing, multipath
- **Overview of Path Loss Models**
- **Free Space Path Loss**
 - Power falloff proportional to λ and to d^{-2}
- **Two Ray Model**
 - Power falloff independent of λ ; proportional to d^{-4}
- **Simplified Model: $P_r = P_t K [d_0/d]^\gamma$, $2 \leq \gamma \leq 8$.**
 - Captures main characteristics of path loss
- **mmWave Path Loss Models:**
 - Large attenuation at 60/120/180GHz and from rain
- **Empirical Models (not on HW or exams)**

Shadowing

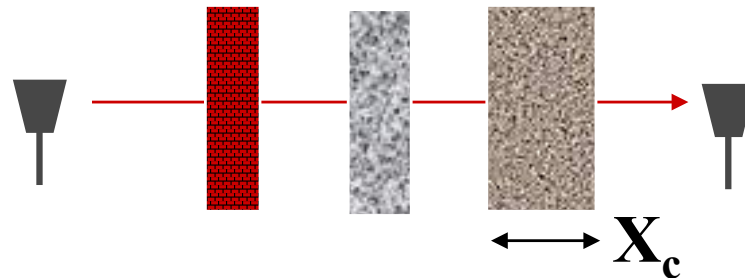


- Models attenuation from obstructions
- Random due to random # and type of obstructions
- Typically follows a log-normal distribution
 - dB value of power is normally distributed
 - $\mu=0$ (mean captured in path loss), $4<\sigma<12$ (empirical)
 - CLT used to explain this model
 - Decorrelates over decorrelation distance X_c

Combined Path Loss and Shadowing

- Linear Model: ψ lognormal

$$\frac{P_r}{P_t} = K \left(\frac{d_0}{d} \right)^\gamma \psi$$

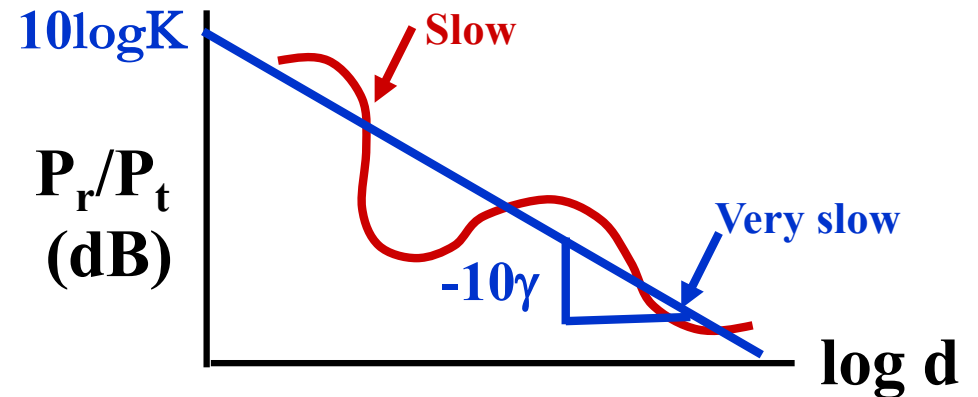


- dB Model

$$\frac{P_r}{P_t} (dB) = \underbrace{10 \log_{10} K}_{K_{dB}} - 10\gamma \log_{10} \left(\frac{d}{d_0} \right) - \psi_{dB}, \quad \psi_{dB} \sim N(\mu_\psi, \sigma_\psi^2)$$

$\mu_\psi = 0$ when average shadowing incorporated into K and γ , else $\mu_\psi > 0$

Outage Probability

- Path loss only: circular “cells”; Path loss+shadowing: amoeba-shaped cells
- Outage probability: probability received power falls below given minimum:

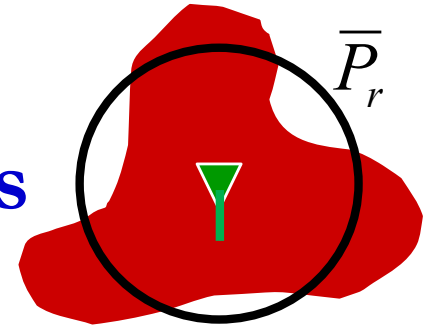


$$P_{out} = \mathbf{p}(P_r < P_{min})$$

- For log-normal shadowing model


$$P_{out} = 1 - Q\left(\frac{P_{min} - (P_t + 10\log_{10}K - 10\gamma\log_{10}(d/d_0))}{\sigma_{\Psi_{dB}}}\right)$$

Model Parameters from Empirical Measurements

- Fit model to data
- Path loss (K, γ), d_0 known:
 - “Best fit” line through dB data
 - K obtained from measurements at d_0 .
 - Or can solve for (K, γ) simultaneously (least squares fit)
 - Exponent is MMSE estimate based on data
 - Captures mean due to shadowing
- Shadowing variance
 - Variance of data relative to path loss model (**straight line**) with MMSE estimate for γ

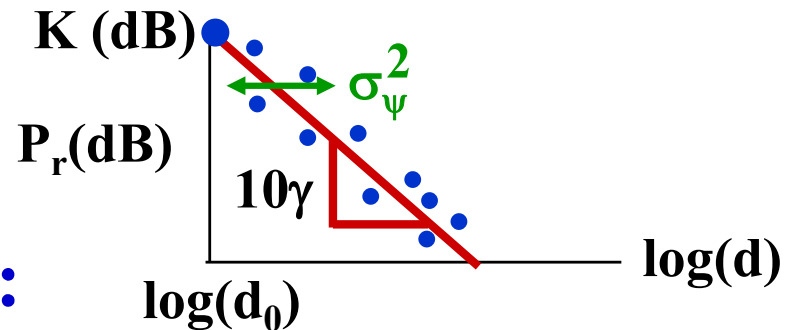

Statistical Multipath Model

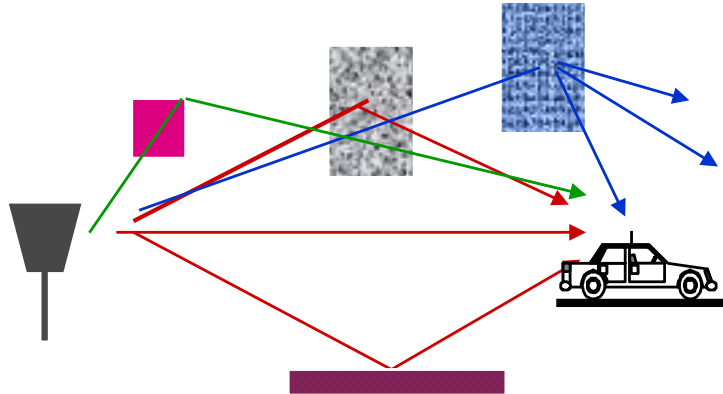

- Random # of multipath components, each with
 - Random amplitude
 - Random phase
 - Random Doppler shift
 - Random delay
- Random components change with time
- Leads to time-varying channel impulse response

Main Points

- Random attenuation due to shadowing modeled as log-normal (empirical parameters)
- Shadowing decorrelates over decorrelation distance
- Combined path loss and shadowing leads to outage and non-circular coverage areas for WiFi/cellular
- Path loss and shadowing parameters obtained from empirical measurements through a least-squares fit
 - Matches environment in which measurements are taken.
 - Can do a 1D fit with K fixed or a 2D fit over K and γ .
- Statistical multipath model leads to a time-varying channel impulse response