


EE359 – Lecture 5 Outline

- **Announcements:**
 - HW posted, due Friday 4pm
 - Background on random processes in Appendix B
- **Review of Last Lecture: Narrowband Fading**
- **Auto and Cross Correlation of In-Phase and Quadrature Signal Components**
- **Correlation and PSD in uniform scattering**
- **Signal Envelope Distributions**
- **Wideband Channels and their Characterization**

Review of Last Lecture

- Model Parameters from Measurements
- Random Multipath Model
- Channel Impulse Response

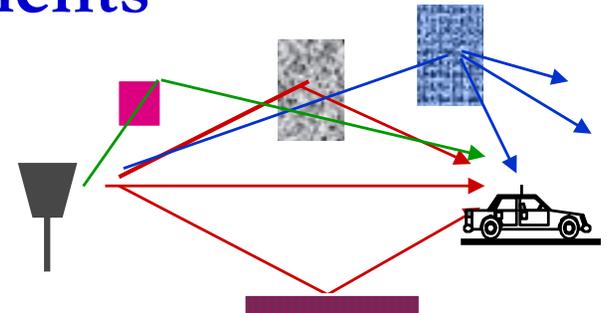

$$c(\tau, t) = \sum_{n=1}^N \alpha_n(t) e^{-j\phi_n(t)} \delta(\tau - \tau_n(t))$$

- Many multipath components, Amplitudes change slowly, Phases change rapidly
- For delay spread $\max |\tau_n(t) - \tau_m(t)| \ll 1/B$, $u(t) \approx u(t - \tau)$.
- Received signal given by

$$r(t) = \Re \left\{ u(t) e^{j2\pi f_c t} \left[\sum_{n=0}^{N(t)} \alpha_n(t) e^{-j\phi_n(t)} \right] \right\}$$

- No signal distortion in time
- Multipath yields complex scale factor in brackets

Review Continued: Narrowband Model

- For $u(t)=e^{j\phi_0}$, $r(t) = r_I(t) \cos(2\pi f_c t + \phi_0) - r_Q(t) \sin(2\pi f_c t + \phi_0)$
- In-phase and quadrature signal components:

$$r_I(t) = \sum_{n=0}^{N(t)} \alpha_n(t) e^{-j\phi_n(t)} \cos(2\pi f_c t), \quad r_Q(t) = \sum_{n=0}^{N(t)} \alpha_n(t) e^{-j\phi_n(t)} \sin(2\pi f_c t)$$

$$\phi_n(t) = 2\pi f_c \tau_n(t) - \phi_{D_n}(t) - \phi_0$$

- For $N(t)$ large, $r_I(t)$ & $r_Q(t)$ jointly Gaussian by CLT
 - Received signal characterized by its mean, autocorrelation, and cross correlation. Let $\phi_n \sim \mathcal{U}[0, 2\pi]$
- $A_{r_I}(\tau) = A_{r_Q}(\tau) = P_r E_{\theta_n} [\cos 2\pi f_{D_n} \tau], \quad f_{D_n} = v \cos \theta_n / \lambda$
- If $\phi_n(t)$ uniform, in-phase/quad components are mean zero, independent, and stationary (WSS)

Cross Correlation

$$r_I(t) = \sum_{n=0}^{N(t)} \alpha_n(t) e^{-j\phi_n(t)} \cos(2\pi f_c t), \quad r_Q(t) = \sum_{n=0}^{N(t)} \alpha_n(t) e^{-j\phi_n(t)} \sin(2\pi f_c t), \quad \phi_n \sim \mathcal{U}[0, 2\pi]$$

- Cross Correlation of inphase/quad signal is

$$A_{r_I, r_Q}(\tau) = E[r_I(t)r_Q(t + \tau)] = P_r E_{\theta_n} [\sin 2\pi f_{D_n} \tau] = -A_{r_I, r_Q}(\tau)$$

- Thus, $A_{r_I, r_Q}(0) = 0$, so $r_I(t)$ and $r_Q(t)$ independent
- Autocorrelation of received signal is


$$A_r(\tau) = A_{r_I}(\tau) \cos(2\pi f_c \tau) - A_{r_I, r_Q}(\tau) \sin(2\pi f_c \tau)$$

- Thus, $\mathbf{r}(t)$ is stationary (WSS)

Uniform AOAs

- Under uniform scattering, in phase and quad comps have no cross correlation and autocorrelation is

$$A_{r_I}(\tau) = A_{r_Q}(\tau) = P_r J_0(2\pi f_D \tau)$$

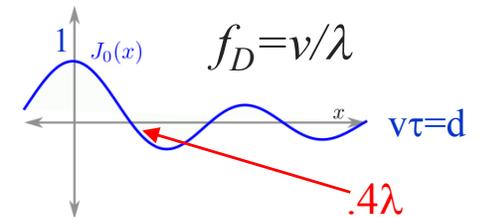


Decorrelates over roughly half a wavelength

- The PSD of received signal is

$$S_r(f) = .25[S_{r_I}(f - f_c) + S_{r_I}(f + f_c)]$$



$$S_{r_I}(f) = \mathcal{F}[P_r J_0(2\pi f_D \tau)]$$

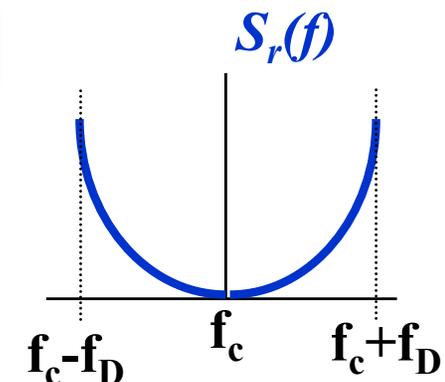

Used to generate simulation values


Signal Envelope Distribution

- CLT approx. leads to Rayleigh distribution (power is exponential)
- When LOS component present, Rician distribution is used
- Measurements support Nakagami distribution in some environments
 - Similar to Rician, but models “worse than Rayleigh”
 - Lends itself better to closed form BER expressions

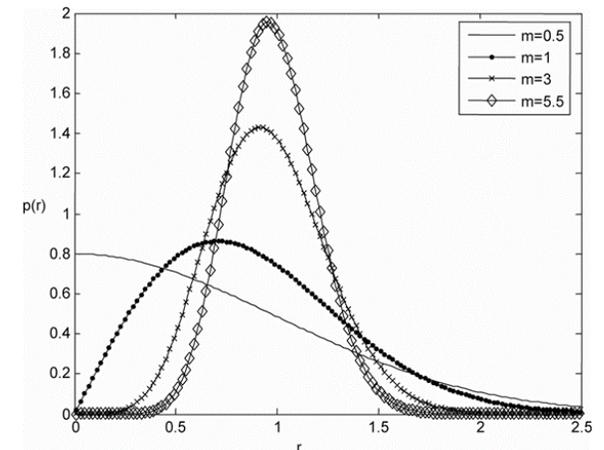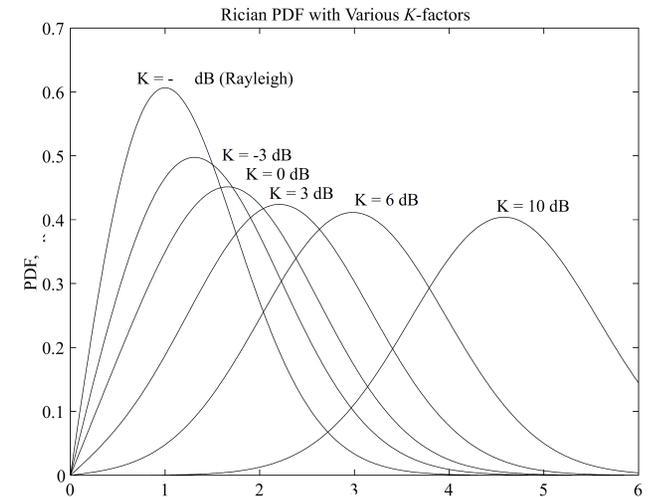

Wideband Channels

- Individual multipath components resolvable
- True when time difference between components exceeds signal bandwidth
- Requires statistical characterization of $c(\tau, t)$
 - Assume CLT, stationarity and uncorrelated scattering
 - Leads to simplification of its autocorrelation function

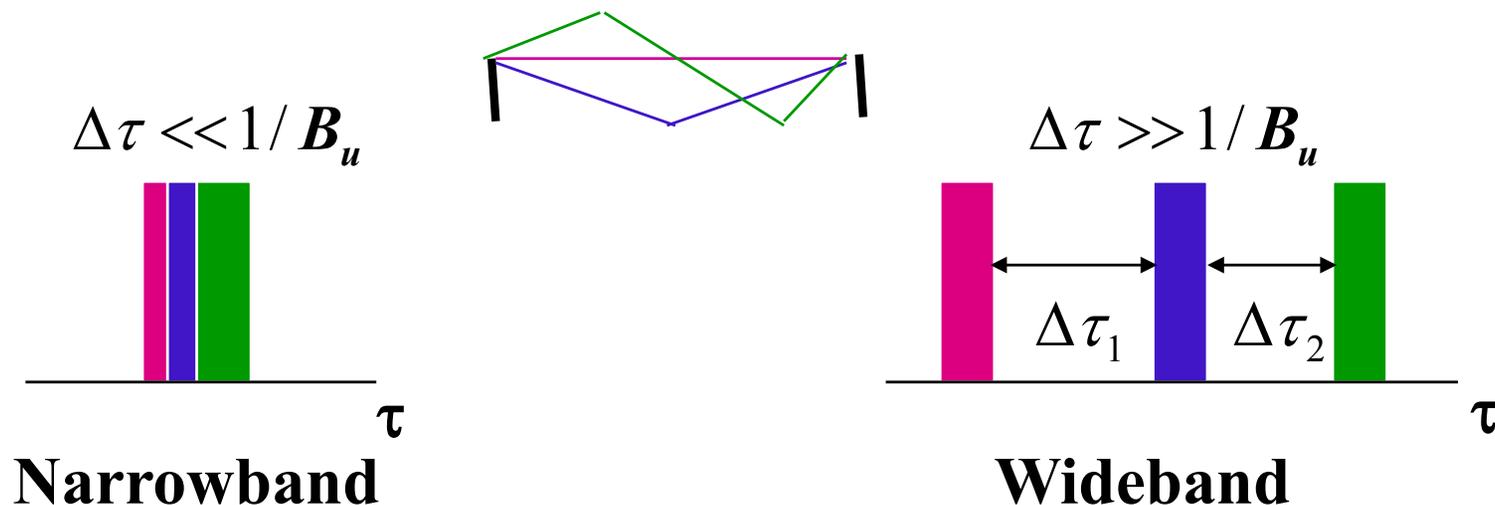

Main Points

- **Narrowband model has in-phase and quad. comps that are zero-mean stationary Gaussian processes**
 - Auto and cross correlation depends on AOAs of multipath
- **Uniform scattering makes autocorrelation of inphase and quad comps of RX signal follow Bessel function**
 - Signal components decorrelate over half wavelength
 - The PSD has a bowl shape centered at carrier frequency
- **Fading distribution depends on environment**
 - Rayleigh, Rician, and Nakagami all common
- **Wideband channels have resolvable multipath**
 - Will statistically characterize $c(\tau,t)$ for WSSUS model