

**Problem Set 1**

**Issued:** Sep. 16, 2010.

**Due:** Sep. 23, 2010.

---

**Problem 1.1: Time-Bandwidth Product**

The time-bandwidth product links the full width at half maximum (FWHM) in the time domain to the corresponding width in the frequency domain. The values are pulse-shape specific, and follow from the Fourier transform relation or the uncertainty principle, as the case may be.

The following are amplitude functions of a pulse in the time domain, in complex notation:

$$f(t) = f_0 \cdot \left(1 - \frac{t^2}{\tau^2}\right) e^{i\omega_0 t} \quad \text{for } |t| \leq \tau \quad (1)$$

$$f(t) = 0 \quad \text{for } |t| \geq \tau \quad (2)$$

- (a) Sketch the intensity function  $|f(t)|^2$  and calculate the full width at half maximum (FWHM)  $\Delta t$  of the intensity function.
- (b) Calculate the Fourier transform  $\tilde{f}(\omega)$ . Sketch the power spectrum  $|\tilde{f}(\omega)|^2$  and identify the full width at half maximum  $\Delta\nu = \Delta\omega/2\pi$ . (Hint: Introduce the variable  $x = (\omega - \omega_0)\tau$  and calculate  $\Delta x$  numerically.)
- (c) Calculate the time-bandwidth product  $\Delta\nu \cdot \Delta t$  for this pulse shape.

### Problem 1.2: Pulse Propagation, Group and Phase Velocity

The input of a fiber contains two Gaussian pulses with spectra (see Fig. 1 (i)):

$$E_1(f) = E_0 \exp \left[ -\frac{(f - f_1)^2}{\Delta f^2} \right]$$
$$E_2(f) = E_0 \exp \left[ -\frac{(f - f_2)^2}{\Delta f^2} \right].$$

The center frequencies of these pulses are  $f_1 = 205$  THz and  $f_2 = 210$  THz (1 THz =  $10^{12}$  Hz). All other parameters of the pulses are identical. Dispersion of the fiber can lead to pulse broadening as well as time delay between pulses as they propagate through the fiber. You are asked to estimate the pulse broadening and time delay from the dispersion characteristics of the fiber.

- (a) The dependence of wave number  $k$  on frequency is linear as shown in Fig. 1 (ii).
- Which pulse arrives at the output first? Give a brief justification.
  - Which pulse is broadened by fiber dispersion more? Give a brief justification.
- (b) The dependence of wave number  $k$  on frequency is composed of linear segments as shown in Fig. 1 (iii).
- Which pulse arrives at the output first? Give a brief justification.
  - Calculate an *approximate* value for the time delay between the two pulses at the output of the fiber given the fiber length is 25 km.
  - Which pulse is broadened by fiber dispersion more? Give a brief justification.
- (c) The dependence of wave number  $k$  on frequency is *parabolic* as shown in Fig. 1 (iv).
- The pulse at 205 THz travels through the fiber in  $3 \cdot 10^{-4}$ s. How long does it *approximately* take the pulse at 210 THz to travel through this fiber? Assume that the slope of  $k - \omega$  graph at 210 THz is two times larger than at 205 THz.
  - Which pulse is more broadened by fiber dispersion? Give a brief justification.


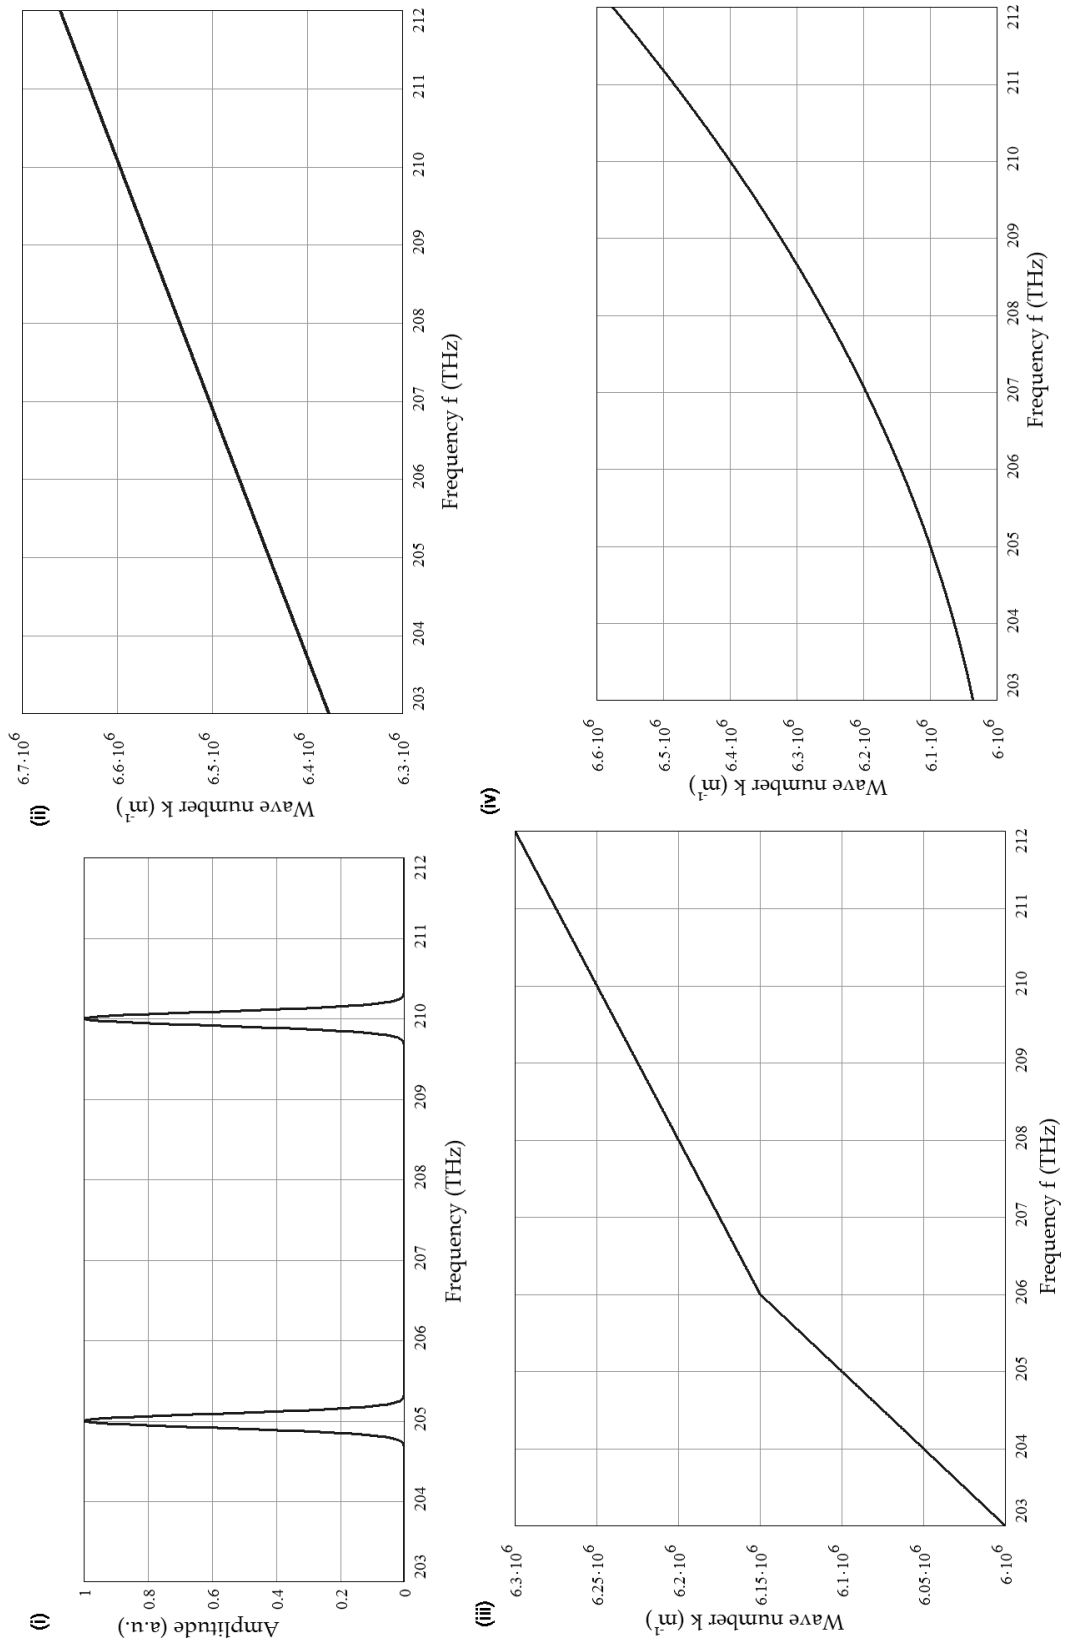


Figure 1: Figures for problem 1.2.

### Problem 1.3: Gires-Tournois Interferometer

Gires-Tournois Interferometer (GTI) is essentially a Fabry-Perot resonator with a 100% reflector. As with an ideal high-reflectivity mirror, the whole reflectivity of the device stays 100%. In contrast, the phase delay is, as with a Fabry-Perot, frequency-dependent. Thus the GTI can be used in a laser resonator for dispersion compensation.

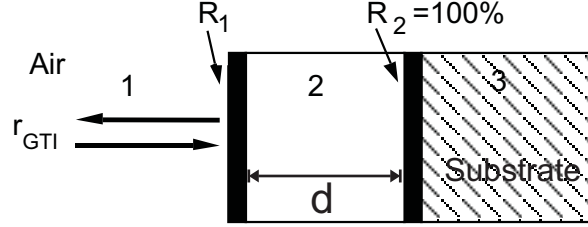

Using  $r_1 = -\sqrt{R_1}$ ,  $r_2 = -\sqrt{R_2} = -1$  and assuming that medium 2 has a refractive index 1, the following expression for the amplitude reflectivity can be found:

$$r_{GTI} = \frac{-\sqrt{R_1} + e^{-i2\beta d}}{1 - \sqrt{R_1}e^{-i2\beta d}} \quad (3)$$

where  $\beta = 2\pi/\lambda$  and  $d$  is the thickness of Medium 2.

- The relationship between intensity reflectivity  $R$  and amplitude reflectivity  $r$  is  $R = |r|^2$ . Show that the intensity reflectivity  $R_{GTI}$  is 100%, as long as there is no absorption or other loss in Medium 2.
- Calculate the phase  $\Phi_{GTI}$  from  $r_{GTI}$  and introduce  $\omega t_0 = 2\beta d$  ( $t_0$  is the round-trip time in Medium 2) in your final answer.
- Calculate the group delay  $T_g = -\frac{\partial \Phi_{GTI}}{\partial \omega}$  and the group delay dispersion  $D_g = \frac{\partial T_g}{\partial \omega}$ .  
From Problem (d) to Problem (h), suppose the thickness of Medium 2 is  $d = 150 \mu m$  and the reflectivity at the interface between medium 1 and 2 is  $R_1 = 4 \%$ .
- Plot  $T_g$  and  $D_g$  as functions of wavelength  $\lambda$  in the band from 798 nm to 803 nm. Indicate proper units.
- From the answer of (d), in which wavelength range can the GTI be used for dispersion compensation inside a laser resonator? Note that the laser crystals and air have positive group velocity dispersions.
- Suppose a 100-fs long Gaussian-shaped optical pulse (peak intensity is normalized to 1) centered at  $\lambda = 800$  nm is reflected from the interface between medium 1 and 2 at  $t = 0$ . At  $t = 10$  ps, how will the reflected

pulses look like? Sketch the pulses at this point of time and specify as many numeric values (intensity) as possible.

- (g) Now suppose a 10-ps long Gaussian-shaped optical pulse (peak intensity is normalized to 1) centered at  $\lambda = 800$  nm is reflected from the interface between medium 1 and 2 at  $t = 0$ . At  $t = 20$  ps, how will the reflected pulse look like? Sketch the pulse at this point in time and specify as many numeric values as possible.
- (h) The answers for Problems (f) and (g) will look quite different. Briefly explain the reason in the frequency and/or time domains.

### Problem 1.4: Kramers-Krönig Relations

The linear dielectric susceptibility is the dielectric response of a medium to an applied electric field, i.e. it is the response of a causal linear time invariant system, and therefore real and imaginary parts obey Kramers-Krönig relations:

$$\chi_r(\Omega) = \frac{2}{\pi} \int_0^{\infty} \frac{\omega \chi_i(\omega)}{\omega^2 - \Omega^2} d\omega = n_r^2(\Omega) - 1 \quad (4)$$

and

$$\chi_i(\Omega) = -\frac{2}{\pi} \int_0^{\infty} \frac{\Omega \chi_r(\omega)}{\omega^2 - \Omega^2} d\omega, \quad (5)$$

where the complex susceptibility is  $\chi(\Omega) = \chi_r(\Omega) - j\chi_i(\Omega)$ .

- (a) Using causality, prove the Kramers-Krönig relations. (Hint: A causal signal can be multiplied by a step function without changing.)
- (b) Suppose you know  $\chi_i(\Omega)$  for the whole frequency range. Then it might look easy to use Eqs. (4) and (5) to evaluate  $\chi_r(\Omega)$ . But in fact, you will find the singularity in the denominator makes it difficult to numerically integrate those equations. How can you circumvent that problem and compute  $\chi_r(\Omega)$  from  $\chi_i(\Omega)$ ? (Hint: Think about the symmetries of the real and imaginary parts of the complex susceptibility.)
- (c) How would you compute the refractive index of a medium,  $n_r(\Omega) = n_0 + \Delta n_r(\Omega)$  (where  $\Delta n_r \ll n_0$ ), if its absorption coefficient  $\alpha(\Omega)$  is known over the whole frequency range? Assume the absorption is weak, i.e.  $|\chi_i| \ll 1 + \chi_r$  and the background index  $n_0$  is known.