CS103, Autumn 2026



Lecture 23:

Unsolvable Problems

Part 1 of 2

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. **Recap from Last Time**
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

R and **RE**

- A language L is ***recognizable*** if there is a TM M with the following property:

  $$\forall w \in \Sigma^*. (M \text{ accepts } w \leftrightarrow w \in L).$$

- That is, for any string w:
  - If $w \in L$, then M accepts w.
  - If $w \notin L$, them M does not accept w.
    - **What does this mean?**
- This is a "weak" notion of solving a problem.
- The class **RE** consists of all the recognizable languages.

R and **RE**

- A language L is ***recognizable*** if there is a TM M with the following property:

$$\forall w \in \Sigma^*. (M \text{ accepts } w \leftrightarrow w \in L).$$

- That is, for any string w:
  - If $w \in L$, then M accepts w.
  - If $w \notin L$, them M does not accept w.
    - It might reject w, or it might loop on w.
- This is a "weak" notion of solving a problem.
- The class **RE** consists of all the recognizable languages.

R and **RE**

- A language L is ***decidable*** if there is a TM M with the following properties:

  $\forall w \in \Sigma^*$. (M accepts $w \leftrightarrow w \in L$).

  M halts on all inputs.

- That is, for any string w:
  - If $w \in L$, then M accepts w.
  - If $w \notin L$, then M rejects w.
- This is a "strong" notion of solving a problem.
- The class **R** consists of all the decidable languages.

The Universal TM

- The ***universal Turing machine***, denoted U_{TM}, is a TM with the following behavior: when run on a string $\langle M, w \rangle$, where M is a TM and w is a string, U_{TM} will
  - ... accept $\langle M, w \rangle$ if M accepts w,
  - ... reject $\langle M, w \rangle$ if M rejects w, and
  - ... loop on $\langle M, w \rangle$ if M loops on w.
- **A_{TM}** is the language recognized by the universal TM. This is the language

  $A_{TM} = \{ \langle M, w \rangle \mid M$ is a TM and M accepts $w \}$

- **U_{TM}** is a **???** for **A_{TM}**.

The Universal TM

- The ***universal Turing machine***, denoted U_{TM}, is a TM with the following behavior: when run on a string $\langle M, w \rangle$, where M is a TM and w is a string, U_{TM} will
  - ... accept $\langle M, w \rangle$ if M accepts w,
  - ... reject $\langle M, w \rangle$ if M rejects w, and
  - ... loop on $\langle M, w \rangle$ if M loops on w.
- **A_{TM}** is the language recognized by the universal TM. This is the language

  $A_{TM} = \{ \langle M, w \rangle \mid M$ is a TM and M accepts $w \}$

- **U_{TM}** is a **recognizer** for **A_{TM}**.

Self-Referential Programs

- Computing devices can compute on their own source code:

  Theorem: It is possible to construct TMs that perform arbitrary computations on their own source code.

- This allows us to write programs that work on their own source code.

```
void cormorant() {
    string me = /* source code of
                 * cormorant
                 */;
    cout << me << endl;
}
```

```
bool curlew(string input) {
    string me = /* source code of
                 * curlew
                 */;
    return input == me;
}
```

```
int avocet() {
    string me = /* source code of
                 * avocet
                 */;
    int result = 0;
    for (char ch: me) {
        if (ch == 'a') result++;
    }
    return result;
}
```

Answer at

https://cs103.stanford.edu/pollev

What do each of these pieces of code do?

Unsolvable Problems

Part 1

1. **Recap from Last Time**
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. **Today's Agenda**
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What's Next?

Outline for Today

- ***Self-Defeating Objects***
  - Objects “too powerful” to exist.
- ***The Fortune Teller***
  - Can you escape your fate?
- ***Why Do Programs Loop?***
  - … and can we eliminate loops?
- ***Undecidable Problems***
  - Something beyond the reach of algorithms.

Unsolvable Problems

Part 1

1. Recap from Last Time
2. **Today's Agenda**
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What's Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. **Self-Defeating Objects**
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

A ***self-defeating object*** is an object whose essential properties ensure it doesn’t exist.

Question: Why is there no largest integer?

Answer: Because if n is the largest integer, what happens when we look at $n+1$?

Self-Defeating Objects

Theorem: There is no largest integer.

Proof sketch: Suppose for the sake of contradiction that there is a largest integer. Call that integer n.

Consider the integer $n+1$.

Notice that $n < n+1$.

But then n isn't the largest integer.

Contradiction! ■-*ish*

Self-Defeating Objects

Theorem: There is no largest integer.

Proof sketch: Suppose for the sake of contradiction that there is a largest integer. Call that integer n.

Consider the integer $n+1$.

Notice that $n < n+1$.

But then n isn't the larg

Contradiction! ■-*ish*

We're using n to construct something that undermines n, hence the term "self-defeating."

An Important Detail

Careful – we're assuming what we're trying to prove!

Claim: There is a largest integer.

Proof: Assume x is the largest integer.

Notice that $x > x - 1$.

So there's no contradiction. ■-*ish*

How do we know there's no contradiction? We just checked one case.

Self-Defeating Objects

- If you can show

  $$x \text{ exists} \to \bot$$

  then you know that *x* doesn't exist. (This is a proof by contradiction.)
- If you can show

  $$x \text{ exists} \to \top$$

  you cannot conclude that *x* exists. (This is not a valid proof technique.)

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. **Self-Defeating Objects**
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?


Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. **The Fortune Teller**
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

The Fortune Teller

- A fortune teller appears who claims they can see into the future.
- For a nominal fee, the fortune teller will tell you anything you want to know about the future.
- Of course, the fortune teller is a lying liar who lies. No one can see the future!
- The fortune teller makes a living taking money from unsuspecting townsfolk. Someone needs to put an end to this!

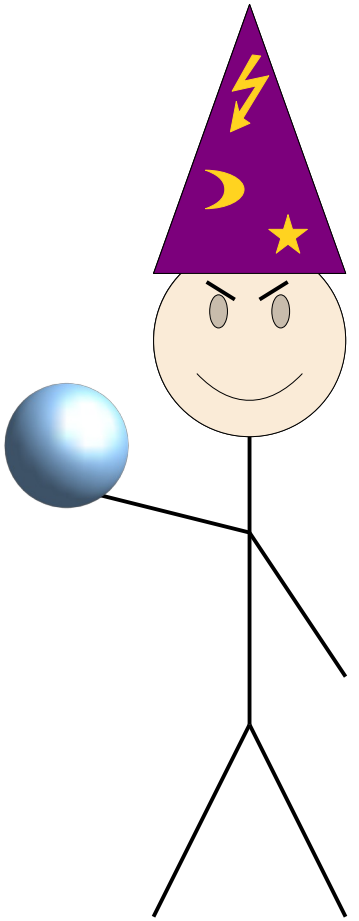

The Fortune Teller


- One day, a trickster arrives. The trickster wants to expose that the fortune teller is a fraud.
- The trickster says the following:

"I have a yes/no question about the future. But before I ask my question, let's talk payment.

If you answer 'yes,' then I'll pay you $42.

If you answer 'no,' then I'll pay you $137."

- The fortune teller thinks for a moment, then agrees.

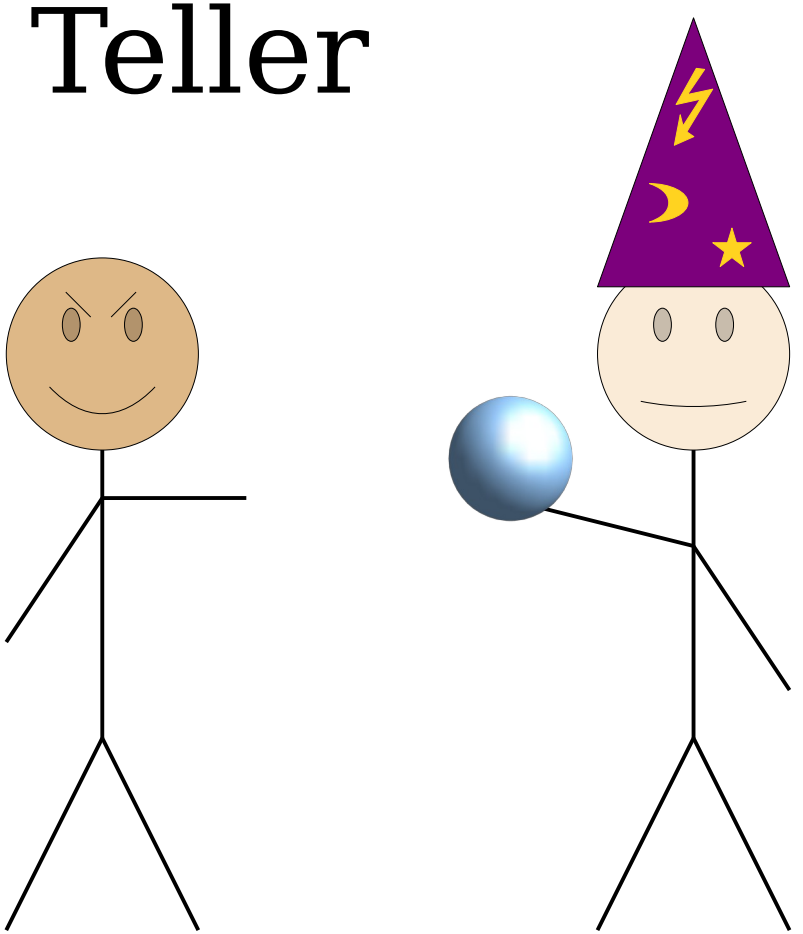

Trickster pays $42 if the fortune teller answers "yes."


Trickster pays $137 if the fortune teller answers "no."

The Fortune Teller

- The trickster then asks this question:

  "Am I going to pay you $137?"

- The fortune teller is trapped!
- Why?

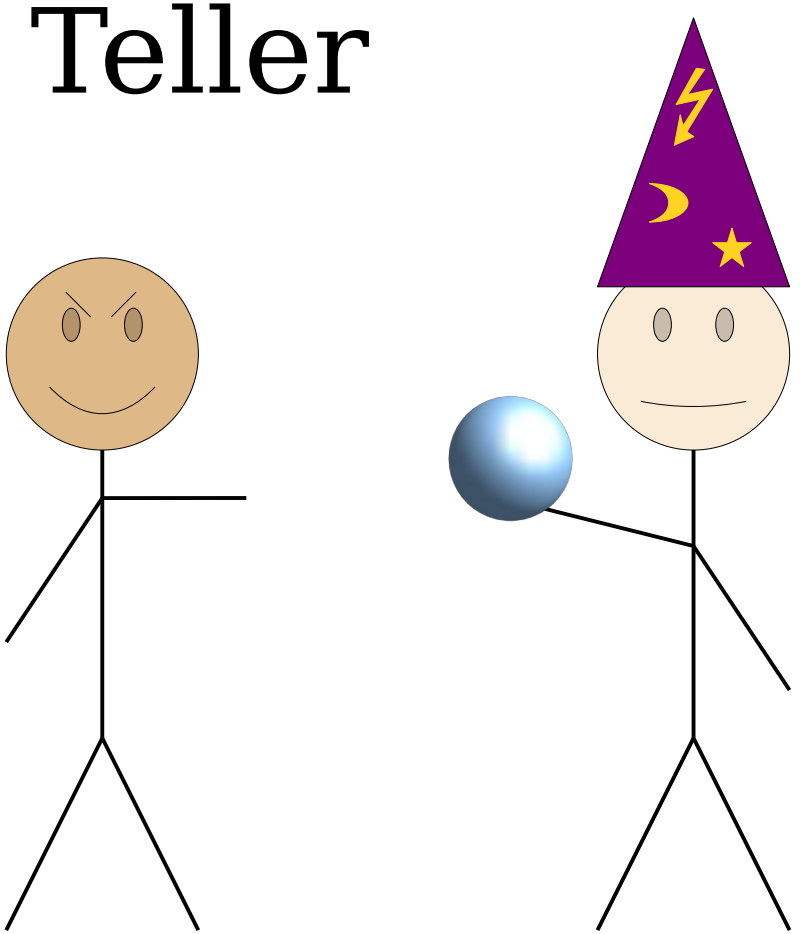

Answer at

https://cs103.stanford.edu/pollev

Trickster pays $42 if the fortune teller answers "yes."

Trickster pays $137 if the fortune teller answers "no."

The Fortune Teller

- The payment scheme the fortune teller agreed to means

  Fortune Teller Says Yes ↔ ***Trickster Pays $42***.


- The trickster's question to the fortune teller means

  Fortune Teller Says Yes ↔ ***Trickster Pays $137***.

- Putting this together, we get

  Trickster Pays $137 ↔ ***Trickster Pays $42***.

- This is impossible!

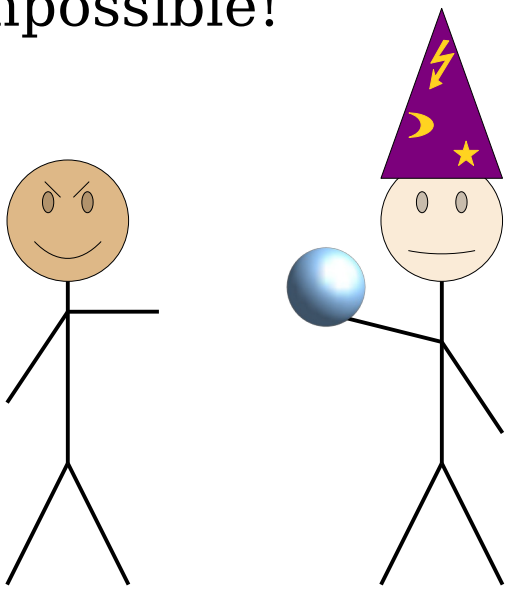


Trickster pays $42 if the fortune teller answers "yes."

Trickster pays $137 if the fortune teller answers "no."

The Fortune Teller

- The fortune teller is a self-defeating object.
- The trickster's strategy is to couple the fortune teller's behavior to what the future holds.
  - The trickster's behavior is chosen in advance to make the fortune teller's answer wrong.
- Therefore, the fortune teller can't answer all questions about all people in the future.

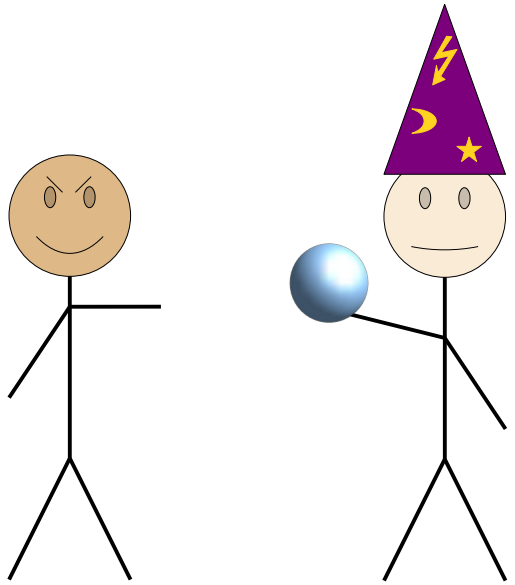

Trickster pays $42 if the fortune teller answers "yes."

Trickster pays $137 if the fortune teller answers "no."

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. **The Fortune Teller**
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. **Why Do Programs Loop?**
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Thoughts on Loops

- In practice, the programs we write sometimes go into infinite loops.
- In Theoryland, Turing machines are allowed to loop. This happens if they don’t accept and don’t reject.
- ***Question:*** Why are infinite loops possible?
- Or rather: are infinite loops an inherent part of computation, or are they some weird sort of “accident” in how we program computers?

Thoughts on Loops

- ***[Major] Theorem:*** The language A_{TM} is recognizable, but undecidable.
  - There's a *recognizer* for A_{TM} (specifically, the universal Turing machine U_{TM}).
  - It is impossible to build a *decider* for this language.
- Stated differently, there's a program we can write (a universal TM) that *has* to loop infinitely on some inputs.
- ***Goal:*** Prove this theorem, and explore its theoretical and philosophical implications.

A_{TM} Revisited

- As a refresher, the language A_{TM} is

  A_{TM} = { $\langle M, w \rangle$ | M is a TM and M accepts w }.

- The universal TM U_{TM} has the following behavior when given as input a TM M and a string w:
  - If M accepts w, then U_{TM} accepts $\langle M, w \rangle$.
  - If M rejects w, then U_{TM} rejects $\langle M, w \rangle$.
  - If M loops on w, then U_{TM} loops on $\langle M, w \rangle$.
- U_{TM} is a recognizer for A_{TM}, but because of that last case it's not a decider for A_{TM}.

A_{TM} Revisited

- As a refresher, the language A_{TM} is

  A_{TM} = { $\langle M, w \rangle$ | M is a TM and M accepts w }.

- Given a TM M and a string w, a decider D for A_{TM} would need to have this behavior:
  - If M accepts w, then D **?** $\langle M, w \rangle$.
  - If M rejects w, then D **?** $\langle M, w \rangle$.
  - If M loops on w, then D **?** $\langle M, w \rangle$.

Answer at

https://cs103.stanford.edu/pollev

A_{TM} Revisited

- As a refresher, the language A_{TM} is

  A_{TM} = { $\langle M, w \rangle$ | M is a TM and M accepts w }.

- Given a TM M and a string w, a decider D for A_{TM} would need to have this behavior:
  - If M accepts w, then D **?** $\langle M, w \rangle$.
  - If M rejects w, then D **?** $\langle M, w \rangle$.
  - If M loops on w, then D **?** $\langle M, w \rangle$.
- This is basically the same set of requirements as U_{TM}, except for what happens if M loops on w.
- Our goal is to prove that there is no way to build a program that meets these requirements.

A_{TM} Revisited

- As a refresher, the language A_{TM} is

  A_{TM} = { $\langle M, w \rangle$ | M is a TM and M accepts w }.

- Given a TM M and a string w, a decider D for A_{TM} would need to have this behavior:
  - If M accepts w, then D accepts $\langle M, w \rangle$.
  - If M rejects w, then D rejects $\langle M, w \rangle$.
  - If M loops on w, then D rejects $\langle M, w \rangle$.
- This is basically the same set of requirements as U_{TM}, except for what happens if M loops on w.
- Our goal is to prove that there is no way to build a program that meets these requirements.

A_{TM} Revisited

- We can envision a decider for A_{TM} as a function

```
bool willAccept(string fn, string input)
```

  that takes as input the source code of a function (`fn`) and a string representing an input to that function (`input`).
- It then does the following:
  - If `fn(input)` returns true, `willAccept(fn, input)` returns true.
  - If `fn(input)` returns false, `willAccept(fn, input)` returns false.
  - If `fn(input)` loops, then `willAccept(fn, input)` returns false.
- We're going to show it's impossible to write a function that actually does this. But for now, let's just explore what such a decider would do.

```
function = "bool f(string input) {
  if (input == "") return false;
  return input[0] == 'a';
}";

input = "abbababba";

willAccept(function, input) = ?
```

```
function = "bool g(string input) {
  while (true) {
    input += input;
  }
}";

input = "yay! ";

willAccept(function, input) = ?
```

```
function = "bool h(string input) {
  int n = input.length();
  while (n > 1) {
    if (n % 2 == 0) n /= 2;
    else n = 3*n + 1;
  }
  return true;
}";

input = /* 10^137 a's */;

willAccept(function, input) = ?
```

Answer at

https://cs103.stanford.edu/pollev

For each of these instances, what does `willAccept(function, input)` return?

Deciding A_{TM}

- Surprising fact: until 2019, no one knew whether there were integers x, y, and z where

$$x^3 + y^3 + z^3 = 33.$$

- A heavily optimized computer search found this answer:

$$x = 8{,}866{,}128{,}975{,}287{,}528$$
$$y = -8{,}778{,}405{,}442{,}862{,}239$$
$$z = -2{,}736{,}111{,}468{,}807{,}040$$

- As of November 2026, no one knows whether there are integers x, y, and z where

$$x^3 + y^3 + z^3 = 114.$$

Deciding A_{TM}

- Consider the language

$$L = \{ \mathtt{a}^n \mid \exists x \in \mathbb{Z}.\ \exists y \in \mathbb{Z}.\ \exists z \in \mathbb{Z}.\ x^3 + y^3 + z^3 = n \}$$

- Here's code for a recognizer to see whether such a triple exists:

```
bool hasTriple(int n) {
  for (int max = 0; ; max++)
    for (int x = -max; x <= max; x++)
      for (int y = -max; y <= max; y++)
        for (int z = -max; z <= max; z++)
          if (x*x*x + y*y*y + z*z*z == n)
            return true;
}
```

- Imagine calling `willAccept(/* hasTriple code */, 114)`.
  - If such a triple exists, `willAccept` returns true.
  - If no such triple exists, `willAccept` returns false.
- ***Key Intuition:*** However `willAccept` is implemented, it has to be clever enough to resolve open problems in mathematics!

Why is A_{TM} Hard?

- ***Intuition:*** A decider for A_{TM} would be able to…
  - … determine whether the hailstone sequence terminates for any input. (Write a recognizer that runs the hailstone sequence, then feed it into the decider for A_{TM}.)
  - … see if any number is the sum of three cubes. (Write a recognizer that tries all infinitely many triples of integers, then feed it into the decider for A_{TM}.)
  - … and much, much more.
- In other words, this seemingly simple problem of "is this program going to terminate?" accidentally scoops up a bunch of other seemingly harder problems.

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. **Why Do Programs Loop?**
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1


1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. **Putting It All Together**
7. What Does This Mean?
8. What’s Next?

To Recap

- We're assuming that, somehow, someone wrote a function

```
bool willAccept(string function, string input);
```

  that takes the code of a function and an input to that function, then
  - returns true if `function(input)` returns true, and
  - returns false if `function(input)` doesn't return true.
- ***Goal:*** Show that this decider is "self-defeating;" its power is so great that it undermines itself.
- ***Idea:*** Convert the fortune teller story into a program.

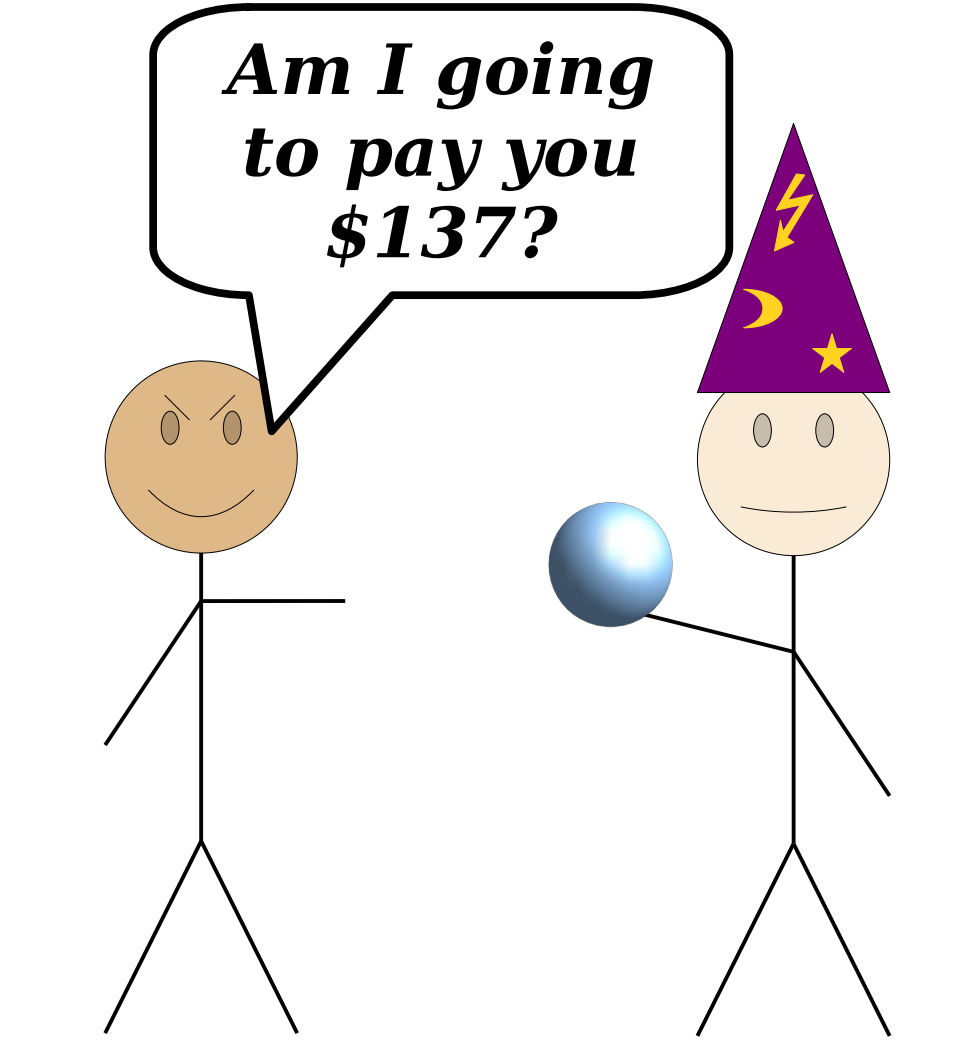


Trickster pays $42 if the fortune teller answers “yes.”

Trickster pays $137 if the fortune teller answers “no.”

```
bool willAccept(string function, string input) {
    // Returns true if function(input) returns true.
    // Returns false otherwise.
}

bool trickster(string input) {
    string me = /* source code of trickster */;
    return !willAccept(me, input);
}
```

A decider for A_{TM} has to have this behavior.

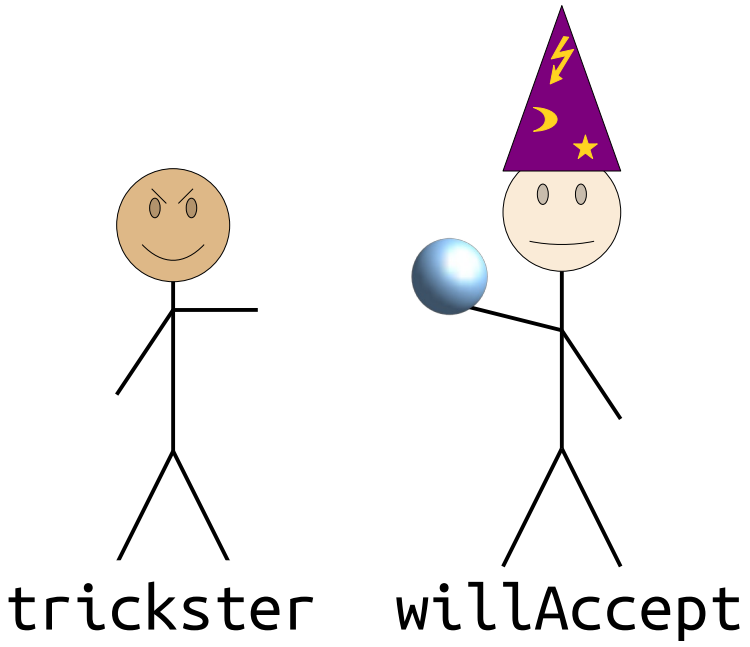

`trickster(input)` returns true

↔

`willAccept(me, input)` returns true

↔

`trickster(input)` does not return true

Because of how we wrote `trickster`.

```
bool willAccept(string function, string input) {
    // Returns true if function(input) returns true.
    // Returns false otherwise.
}
bool trickster(string input) {
    string me = /* source code of trickster */;
    return !willAccept(me, input);
}
```

A self-defeating object.

Using that object against itself.

```
bool willAccept(string function, string input) {
    // Returns true if function(input) returns true.
    // Returns false otherwise.
}
bool trickster(string input) {
    string me = /* source code of trickster */;
    return !willAccept(me, input);
}
```

"The largest integer *n*."

"The integer *n* + 1."

Theorem: There is no largest integer.

Proof sketch: Suppose for the sake of contradiction that there is a largest integer. Call that integer n.

Consider the integer $n+1$.

Notice that $n < n+1$.

But then n isn't the largest integer.

Contradiction! ■-*ish*

Theorem: $A_{TM} \notin \mathbf{R}$.

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof:

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof: By contradiction; assume that $A_{TM} \in \mathbf{R}$.

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof: By contradiction; assume that $A_{TM} \in \mathbf{R}$. Then there is a decider D for A_{TM}.

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof: By contradiction; assume that $A_{TM} \in \mathbf{R}$. Then there is a decider D for A_{TM}. We can represent D as a function

```
bool willAccept(string function, string w);
```

that takes in the source code of a function `function` and a string `w`, then returns true if `function(w)` returns true and returns false otherwise.

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof: By contradiction; assume that $A_{TM} \in \mathbf{R}$. Then there is a decider D for A_{TM}. We can represent D as a function

```
bool willAccept(string function, string w);
```

that takes in the source code of a function `function` and a string `w`, then returns true if `function(w)` returns true and returns false otherwise. Given this, consider this function `trickster`:

```
bool trickster(string input) {
    string me = /* source code of trickster */;
    return !willAccept(me, input);
}
```

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof: By contradiction; assume that $A_{TM} \in \mathbf{R}$. Then there is a decider D for A_{TM}. We can represent D as a function

```
bool willAccept(string function, string w);
```

that takes in the source code of a function `function` and a string `w`, then returns true if `function(w)` returns true and returns false otherwise. Given this, consider this function `trickster`:

```
bool trickster(string input) {
    string me = /* source code of trickster */;
    return !willAccept(me, input);
}
```

Since `willAccept` decides A_{TM} and `me` holds the source of `trickster`, we know that

`willAccept(me, input)` returns true if and only if `trickster(input)` returns true.

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof: By contradiction; assume that $A_{TM} \in \mathbf{R}$. Then there is a decider D for A_{TM}.

We can represent D as a function

```
bool willAccept(string function, string w);
```

that takes in the source code of a function `function` and a string `w`, then returns true if `function(w)` returns true and returns false otherwise. Given this, consider this function `trickster`:

```
bool trickster(string input) {
    string me = /* source code of trickster */;
    return !willAccept(me, input);
}
```

Since `willAccept` decides A_{TM} and `me` holds the source of `trickster`, we know that

`willAccept(me, input)` returns true if and only if `trickster(input)` returns true.

Given how `trickster` is written, we see that

`willAccept(me, input)` returns true if and only if `trickster(input)` doesn't return true.

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof: By contradiction; assume that $A_{TM} \in \mathbf{R}$. Then there is a decider D for A_{TM}.

We can represent D as a function

```
bool willAccept(string function, string w);
```

that takes in the source code of a function `function` and a string `w`, then returns true if `function(w)` returns true and returns false otherwise. Given this, consider this function `trickster`:

```
bool trickster(string input) {
    string me = /* source code of trickster */;
    return !willAccept(me, input);
}
```

Since `willAccept` decides A_{TM} and `me` holds the source of `trickster`, we know that

`willAccept(me, input)` returns true if and only if `trickster(input)` returns true.

Given how `trickster` is written, we see that

`willAccept(me, input)` returns true if and only if `trickster(input)` doesn't return true.

This means that

`trickster(input)` returns true if and only if `trickster(input)` doesn't return true.

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof: By contradiction; assume that $A_{TM} \in \mathbf{R}$. Then there is a decider D for A_{TM}.

We can represent D as a function

```
bool willAccept(string function, string w);
```

that takes in the source code of a function `function` and a string `w`, then returns true if `function(w)` returns true and returns false otherwise. Given this, consider this function `trickster`:

```
bool trickster(string input) {
    string me = /* source code of trickster */;
    return !willAccept(me, input);
}
```

Since `willAccept` decides A_{TM} and `me` holds the source of `trickster`, we know that

`willAccept(me, input)` returns true if and only if `trickster(input)` returns true.

Given how `trickster` is written, we see that

`willAccept(me, input)` returns true if and only if `trickster(input)` doesn't return true.

This means that

`trickster(input)` returns true if and only if `trickster(input)` doesn't return true.

This is impossible.

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof: By contradiction; assume that $A_{TM} \in \mathbf{R}$. Then there is a decider D for A_{TM}. We can represent D as a function

```
bool willAccept(string function, string w);
```

that takes in the source code of a function `function` and a string `w`, then returns true if `function(w)` returns true and returns false otherwise. Given this, consider this function `trickster`:

```
bool trickster(string input) {
    string me = /* source code of trickster */;
    return !willAccept(me, input);
}
```

Since `willAccept` decides A_{TM} and `me` holds the source of `trickster`, we know that

`willAccept(me, input)` returns true if and only if `trickster(input)` returns true.

Given how `trickster` is written, we see that

`willAccept(me, input)` returns true if and only if `trickster(input)` doesn't return true.

This means that

`trickster(input)` returns true if and only if `trickster(input)` doesn't return true.

This is impossible. We've reached a contradiction, so our assumption was wrong and A_{TM} is undecidable.

Theorem: $A_{TM} \notin \mathbf{R}$.

Proof: By contradiction; assume that $A_{TM} \in \mathbf{R}$. Then there is a decider D for A_{TM}. We can represent D as a function

```
bool willAccept(string function, string w);
```

that takes in the source code of a function `function` and a string `w`, then returns true if `function(w)` returns true and returns false otherwise. Given this, consider this function `trickster`:

```
bool trickster(string input) {
    string me = /* source code of trickster */;
    return !willAccept(me, input);
}
```

Since `willAccept` decides A_{TM} and `me` holds the source of `trickster`, we know that

`willAccept(me, input)` returns true if and only if `trickster(input)` returns true.


Given how `trickster` is written, we see that

`willAccept(me, input)` returns true if and only if `trickster(input)` doesn't return true.

This means that

`trickster(input)` returns true if and only if `trickster(input)` doesn't return true.

This is impossible. We've reached a contradiction, so our assumption was wrong and A_{TM} is undecidable. ■

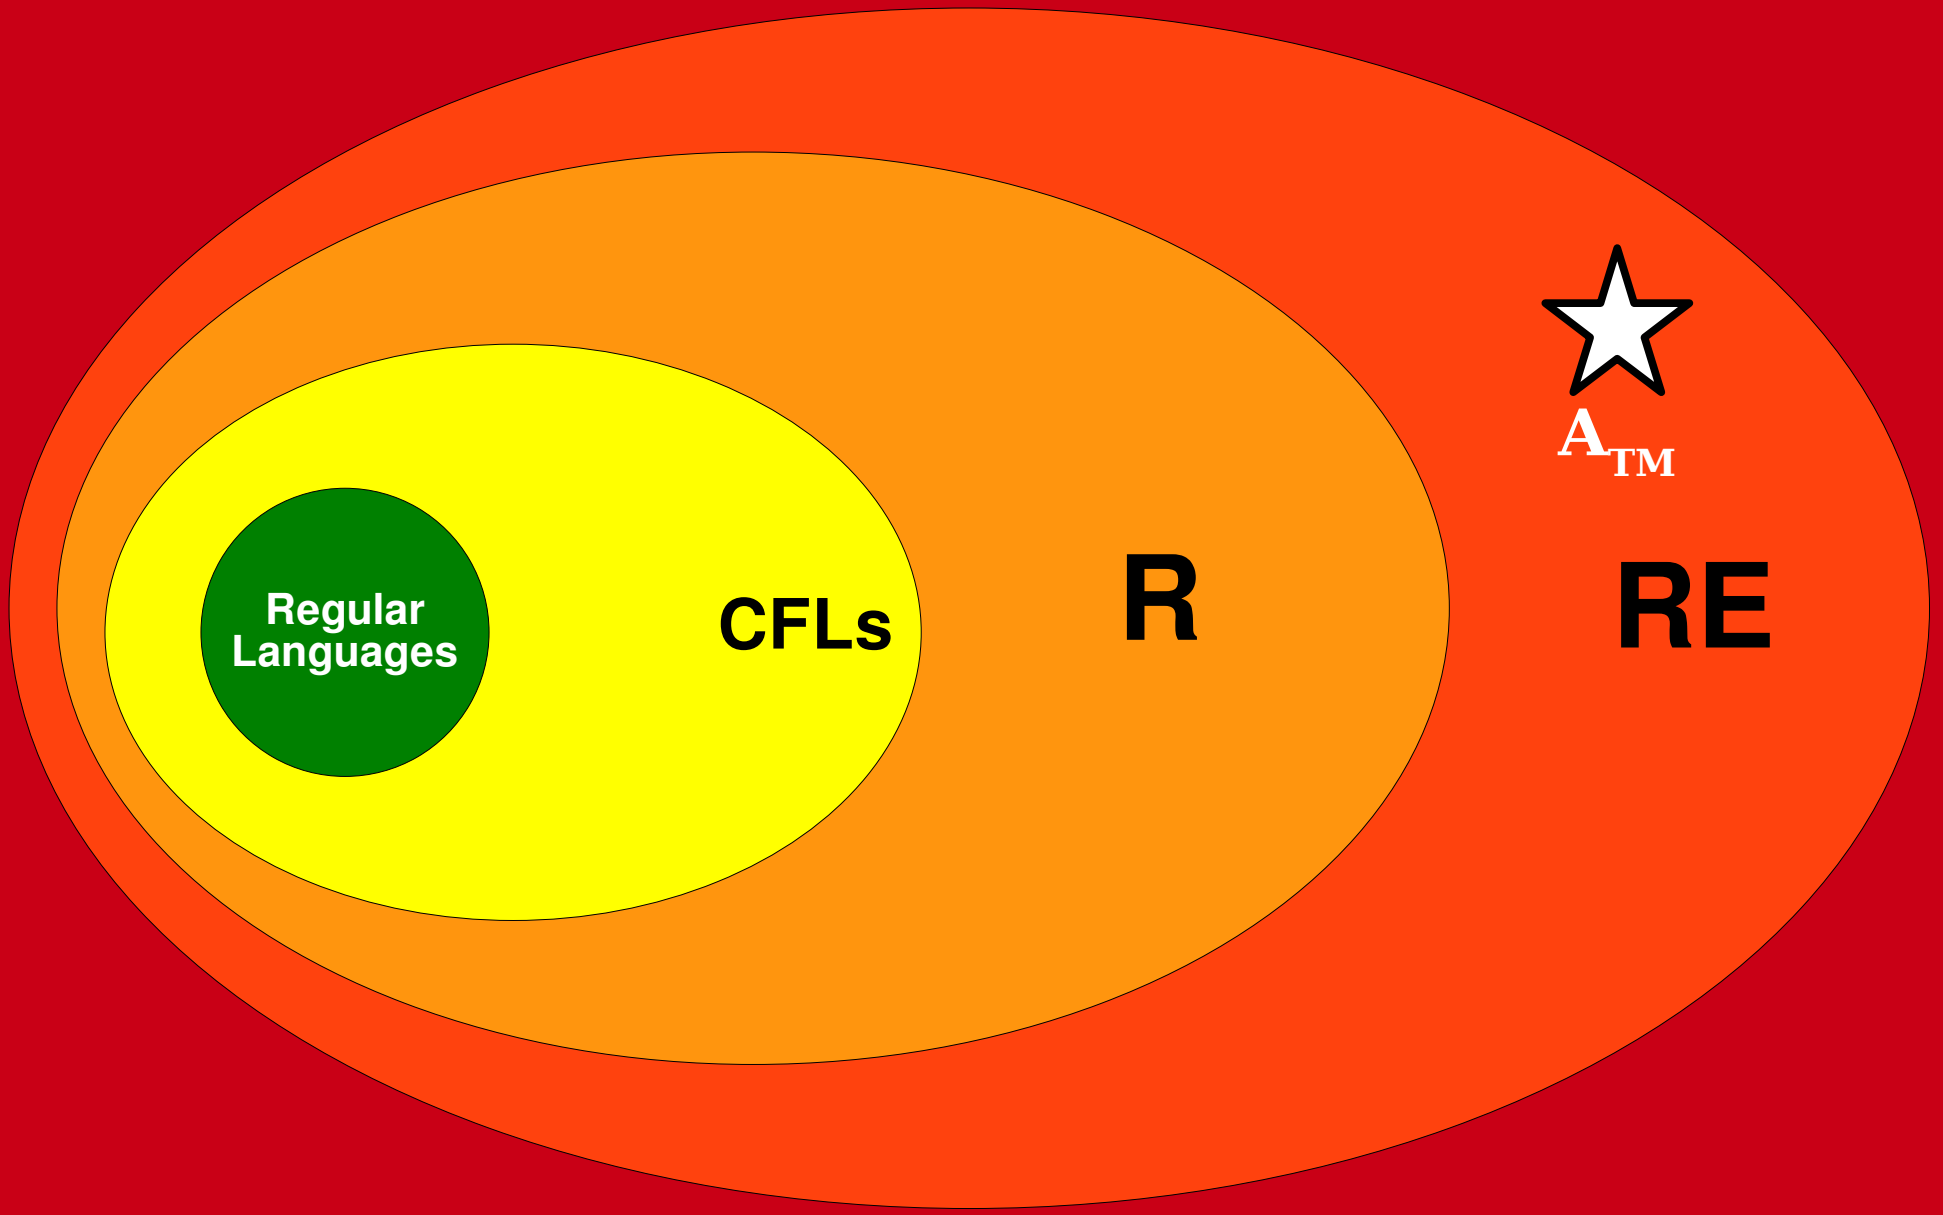
Regular Languages
CFLs
R
RE
A_{TM}
All Languages

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. **Putting It All Together**
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. **What Does This Mean?**
8. What’s Next?

What Does This Mean?

- In one fell swoop, we've proven that
  - A_{TM} is ***undecidable***; there is no general algorithm that can determine whether a TM will accept a string.
  - **R** ≠ **RE**, because $A_{TM} \notin$ **R** but $A_{TM} \in$ **RE**.
- What do these three statements really mean? As in, why should you care?

$A_{TM} \notin \mathbf{R}$

- What exactly does it mean for A_{TM} to be undecidable?

  Intuition: The only general way to find out what a program will do is to run it.

- As you'll see, this means that it's provably impossible for computers to be able to answer most questions about what a program will do.

$A_{TM} \notin \mathbf{R}$

- At a more fundamental level, the existence of undecidable problems tells us the following:

  There is a difference between what is true and what we can discover is true.

- Given a TM *M* and a string *w*, one of these two statements is true:

  M* accepts *w ***M* does not accept *w***

  But since A_{TM} is undecidable, there is no algorithm that can always determine which of these statements is true!

R ≠ RE

- Because **R ≠ RE**, there is a difference between decidability and recognizability:

In some sense, it is fundamentally harder to solve a problem than it is to check an answer.

- There are problems where, when the answer is “yes,” you can confirm it (run a recognizer), but where if you don’t have the answer, you can’t come up with it in a mechanical way (build a decider).

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. **What Does This Mean?**
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. What’s Next?

Unsolvable Problems

Part 1

1. Recap from Last Time
2. Today’s Agenda
3. Self-Defeating Objects
4. The Fortune Teller
5. Why Do Programs Loop?
6. Putting It All Together
7. What Does This Mean?
8. **What’s Next?**

Next Time

- ***Why All This Matters***
  - Important, practical, undecidable problems.
- ***Intuiting RE***
  - What exactly is the class **RE** all about?
- ***Verifiers***
  - A totally different perspective on problem solving.
- ***Beyond RE***
  - Finding an impossible problem using very familiar techniques.