

Fibonacci Heaps


Outline for Today

- ***Recap from Last Time***
 - Quick refresher on binomial heaps and lazy binomial heaps.
- ***The Need for decrease-key***
 - An important operation in many graph algorithms.
- ***Fibonacci Heaps***
 - A data structure efficiently supporting ***decrease-key***.
- ***Representational Issues***
 - Some of the challenges in Fibonacci heaps.

Recap from Last Time

(Lazy) Binomial Heaps

- Last time, we covered the *binomial heap* and a variant called the *lazy binomial heap*.
- These are priority queue structures designed to support efficient *melding*.
- Elements are stored in a collection of *binomial trees*.

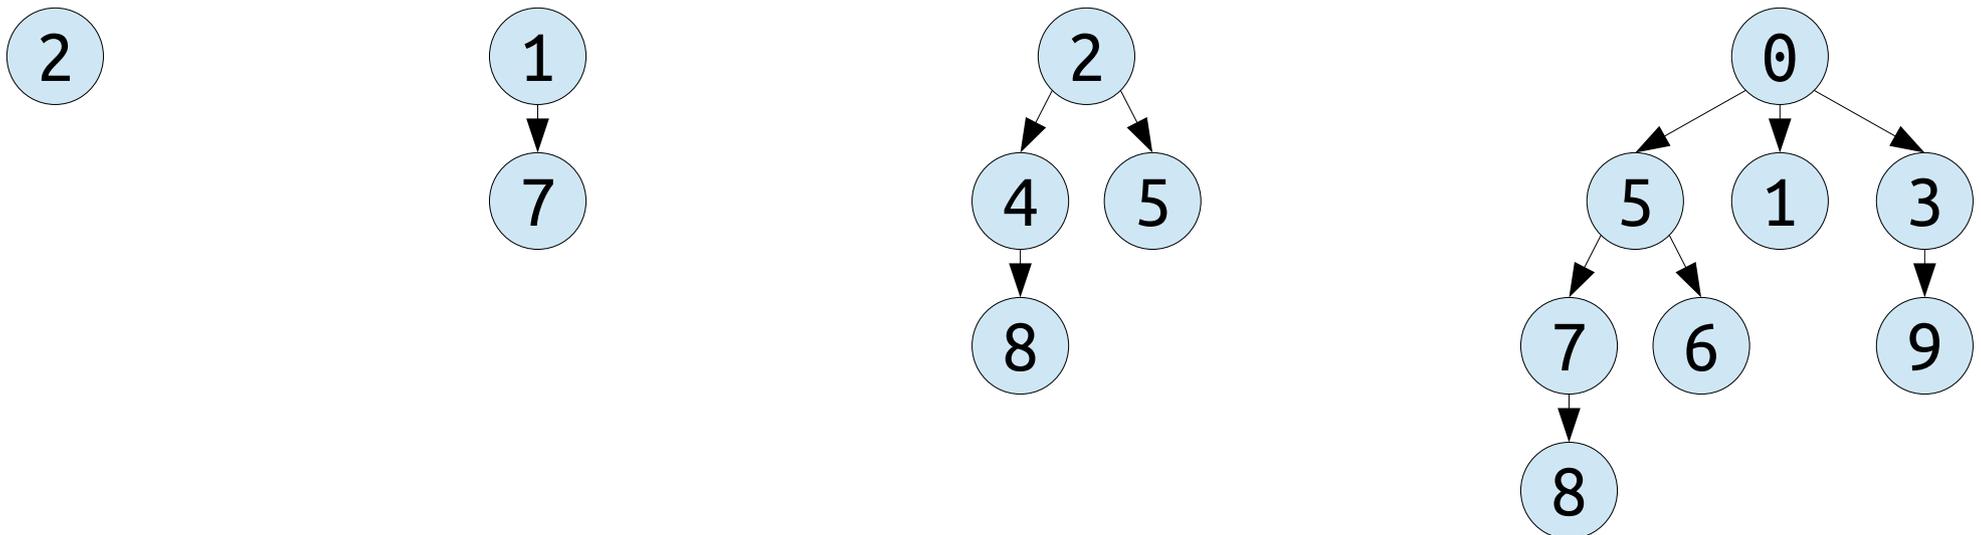

Eager Binomial Heap

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.

Eager Binomial Heap

1

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.

Eager Binomial Heap


1

2

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap



Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

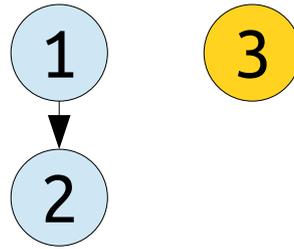

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

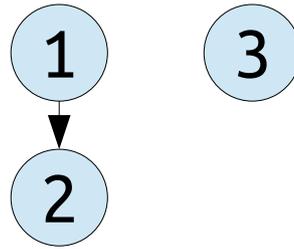

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

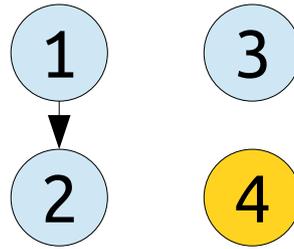

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

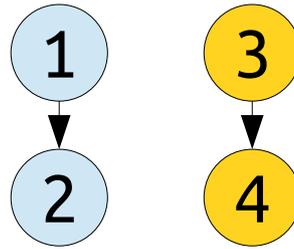

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

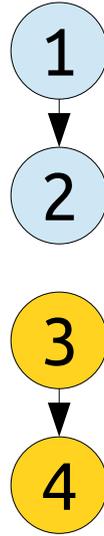

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

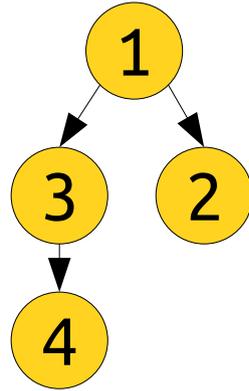

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

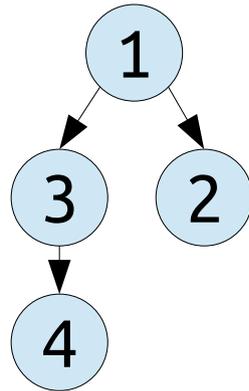

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

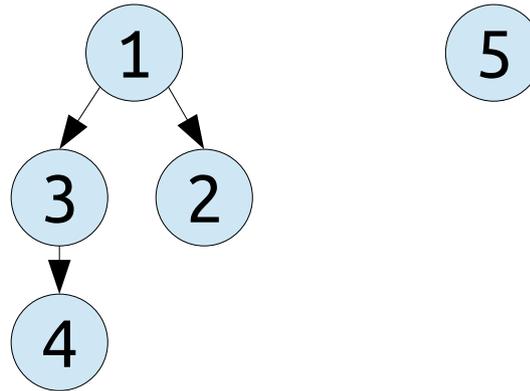

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

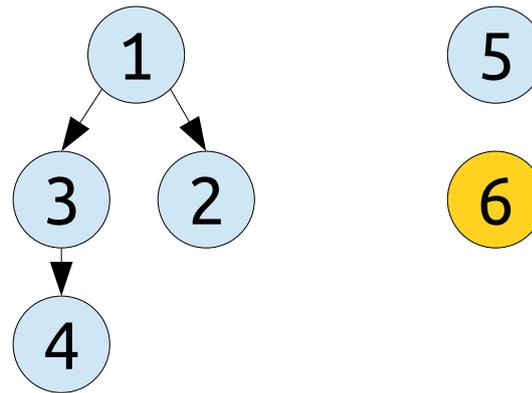

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

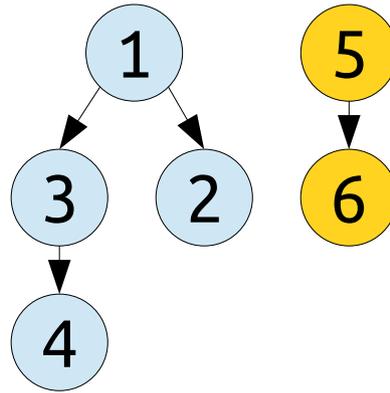

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

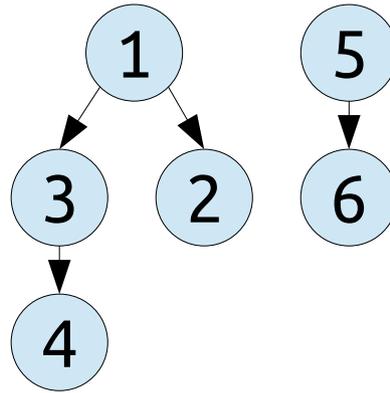

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

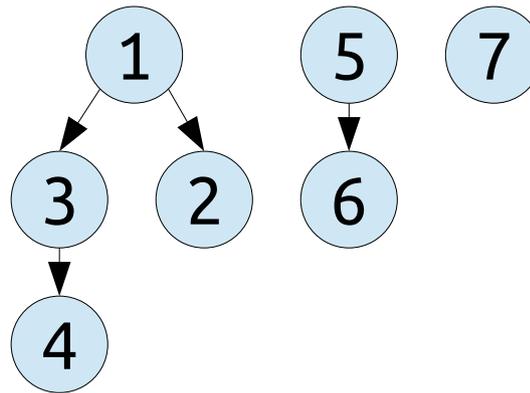

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

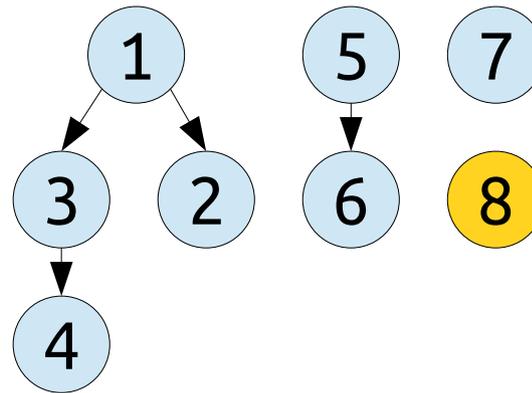

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

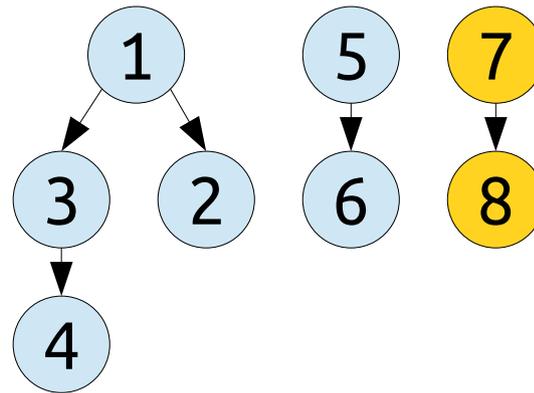

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

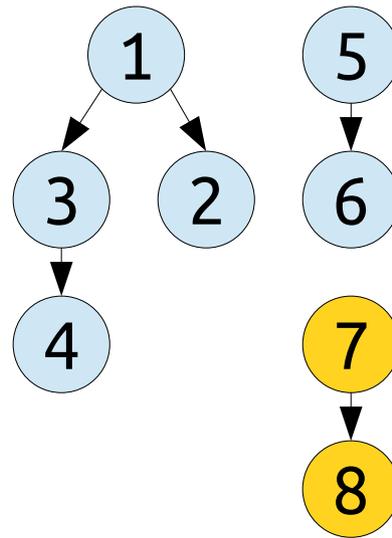

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

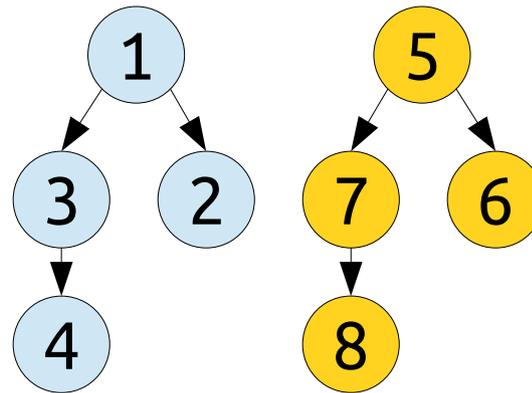

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

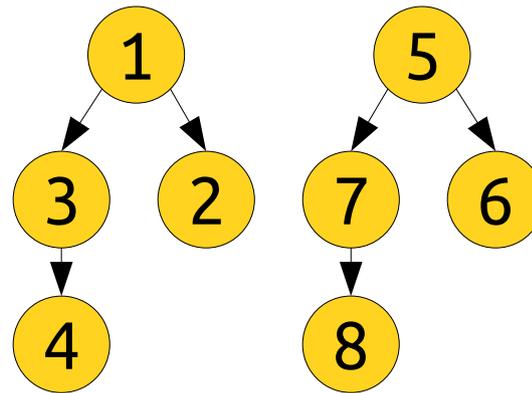

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

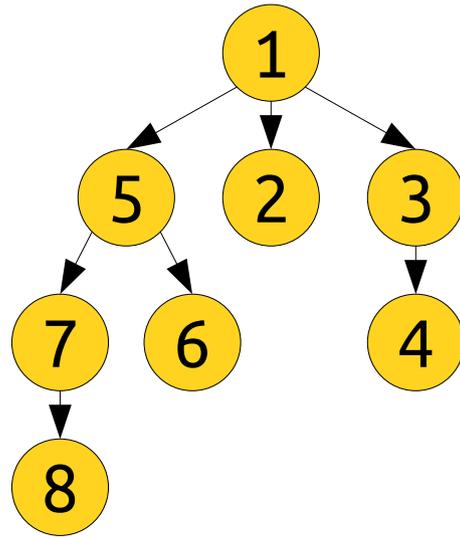

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.


Eager Binomial Heap

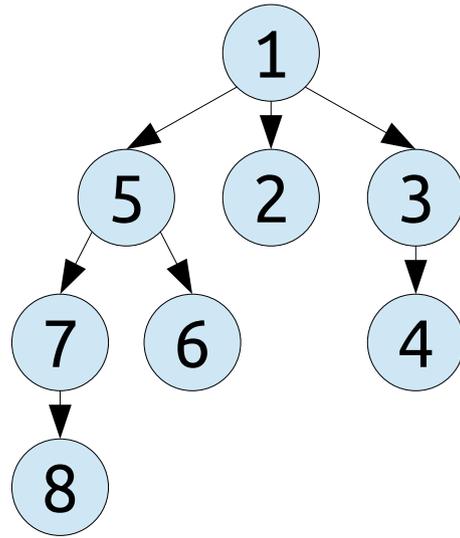

Lazy Binomial Heap

Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.

Eager Binomial Heap

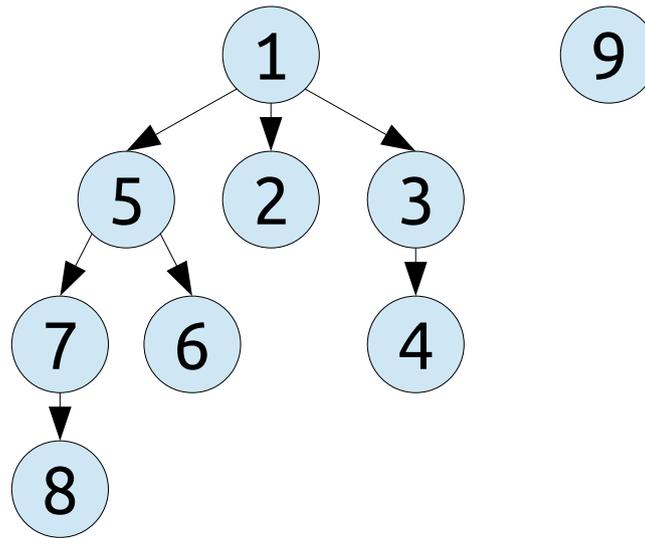


Lazy Binomial Heap



Draw what happens if we *enqueue* the numbers 1, 2, 3, 4, 5, 6, 7, 8, and 9 into each heap.

Eager Binomial Heap

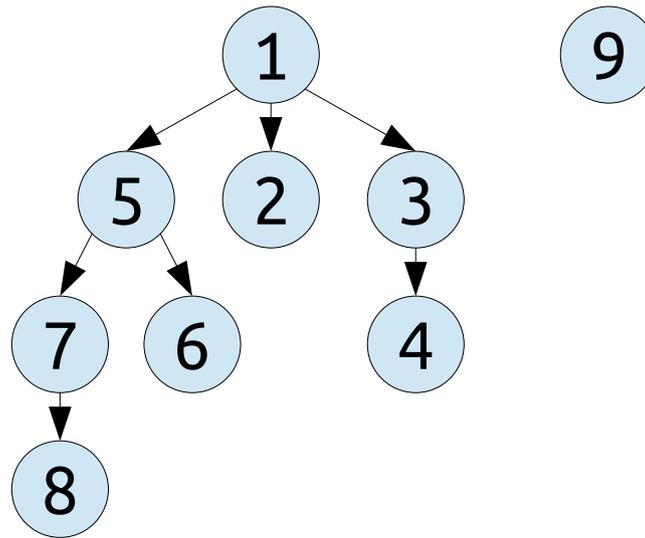


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

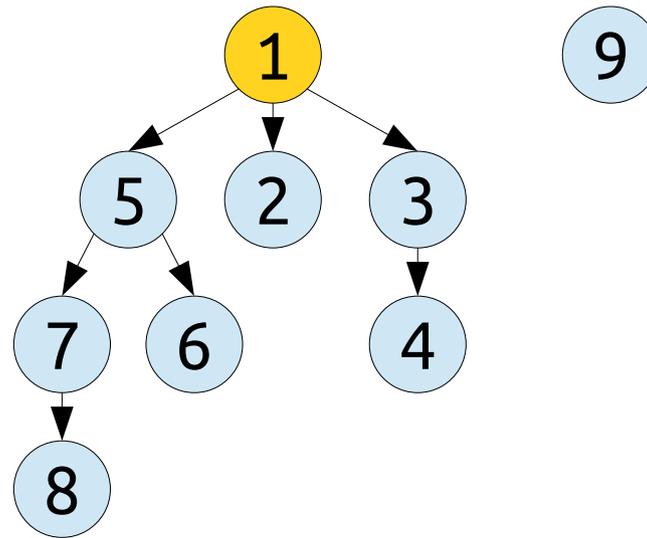


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

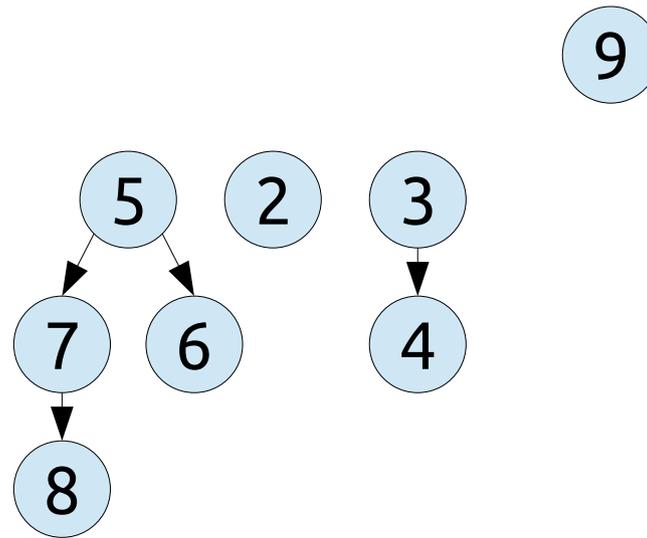


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

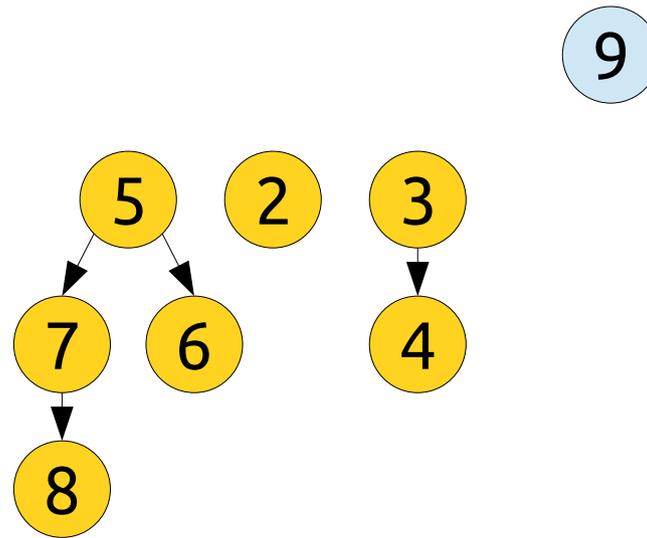


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

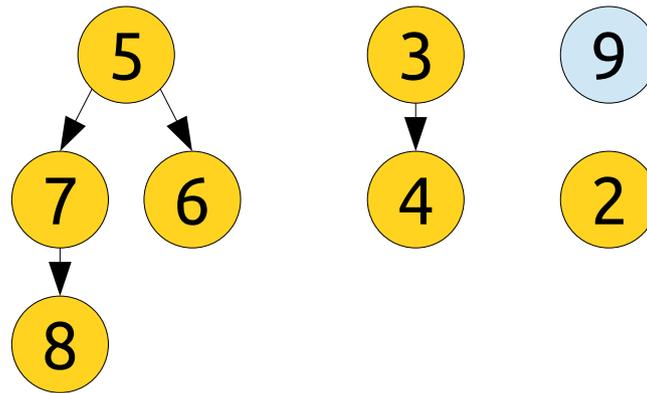


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

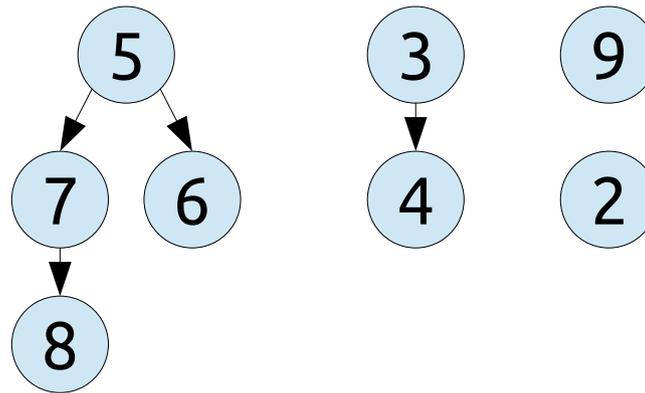


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

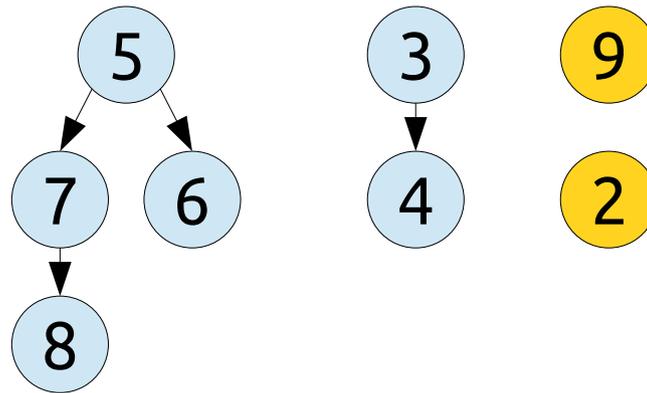


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

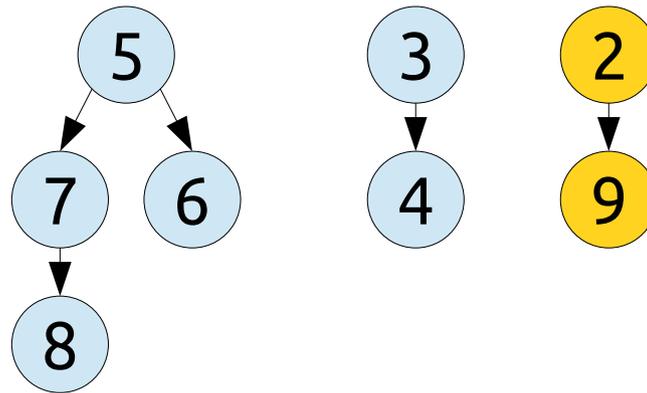


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

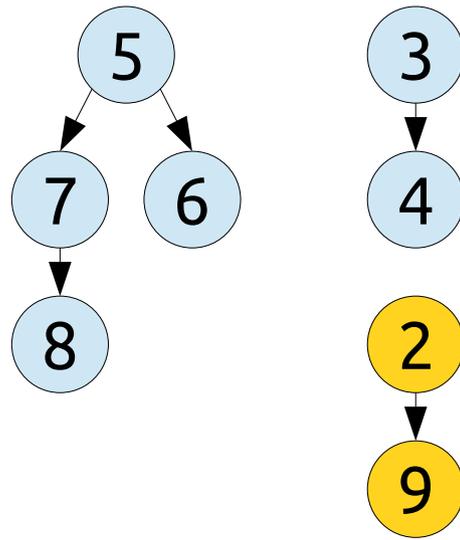


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

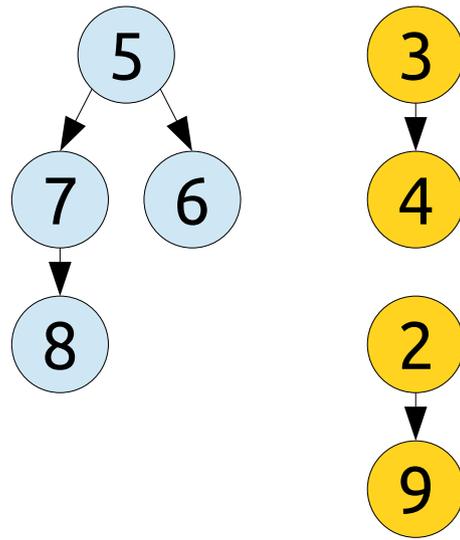


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

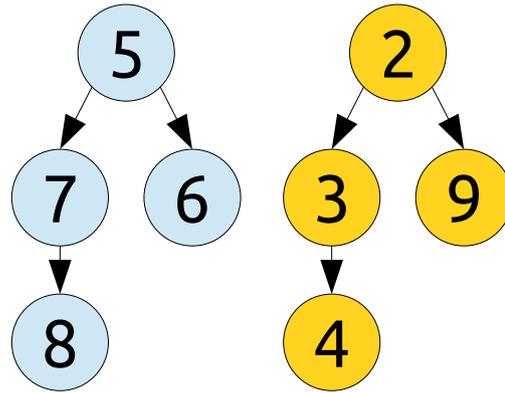


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

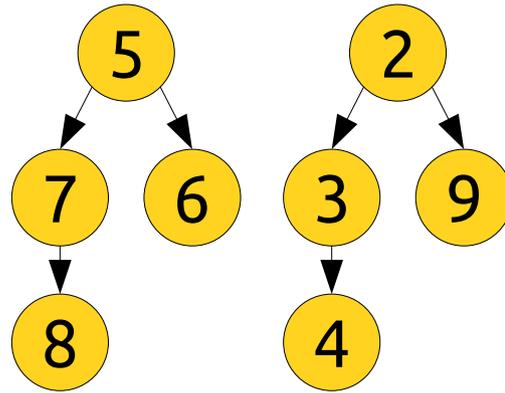


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

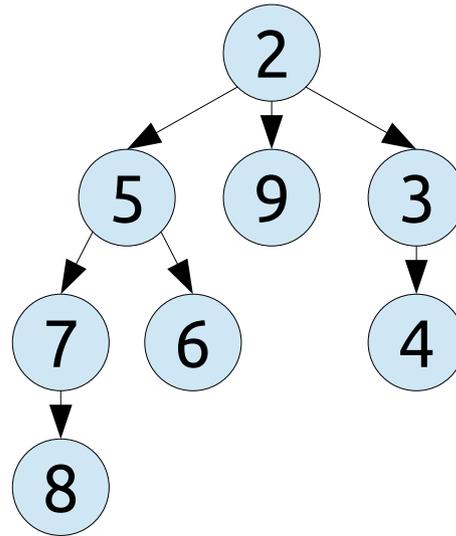


Lazy Binomial Heap



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

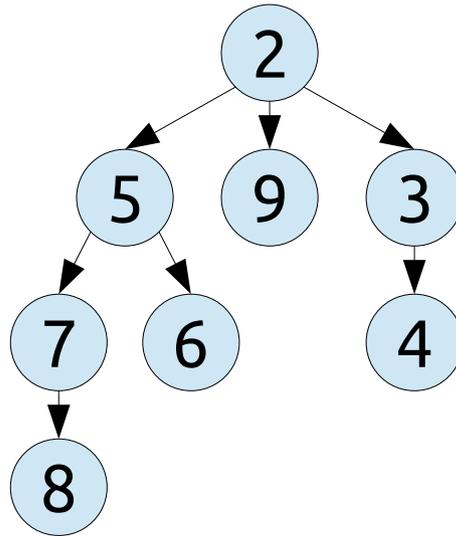


Lazy Binomial Heap




Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

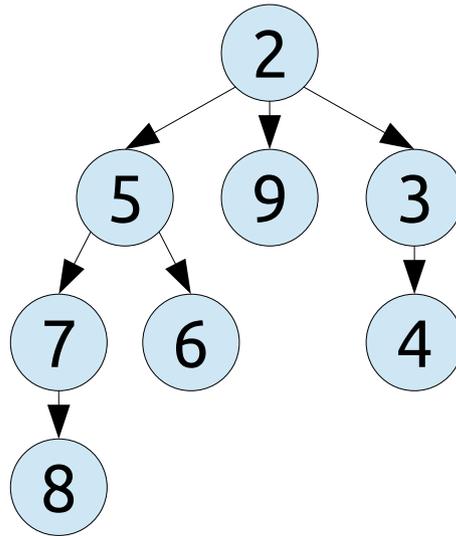


Lazy Binomial Heap

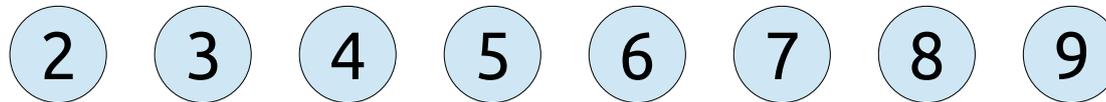

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

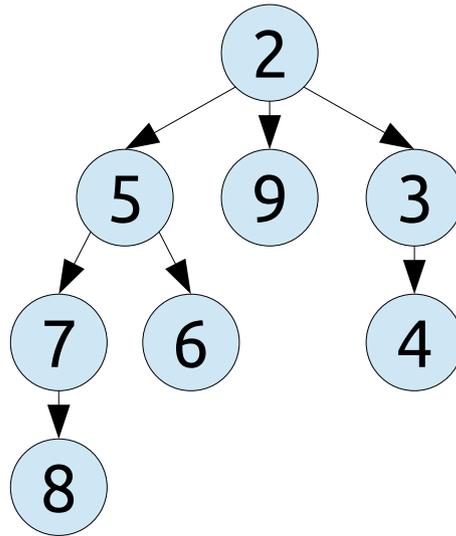


Lazy Binomial Heap

Order 2


Order 1

Order 0

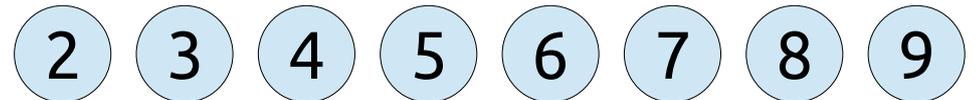

Draw what happens after performing an *extract-min* in each binomial heap.

Eager Binomial Heap

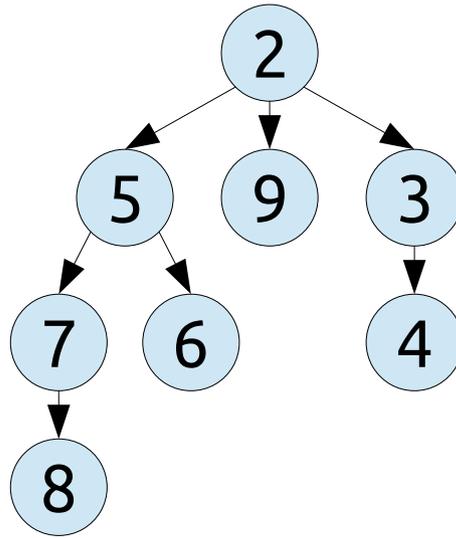


Lazy Binomial Heap

Order 2


Order 1

Order 0

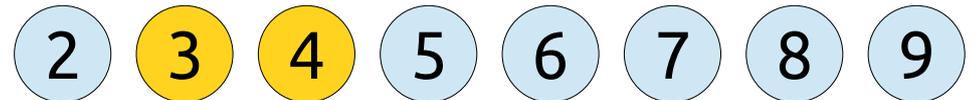

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

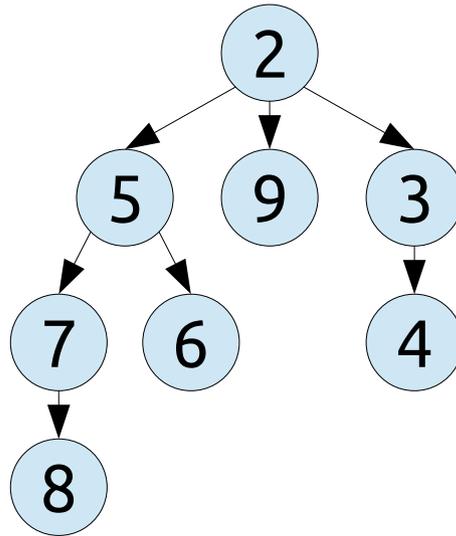


Lazy Binomial Heap

Order 2


Order 1

Order 0

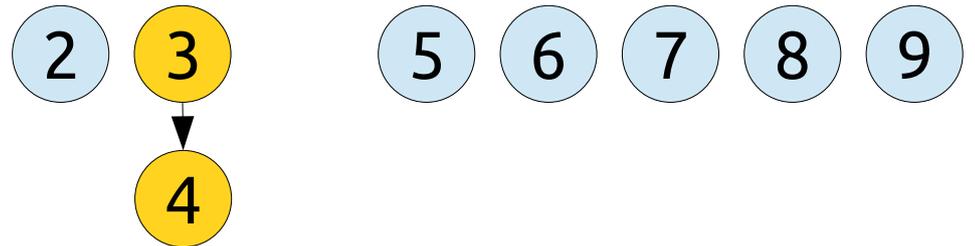

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

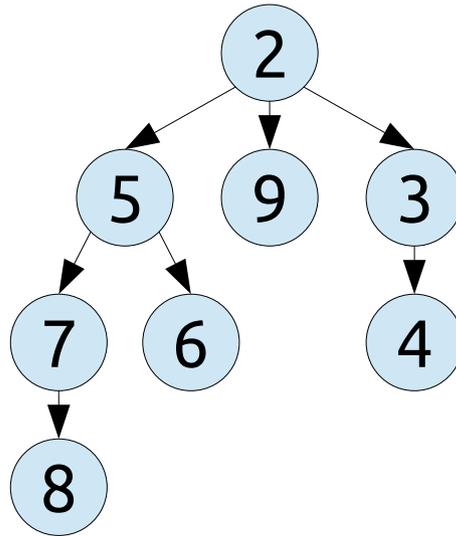


Lazy Binomial Heap

Order 2


Order 1

Order 0



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

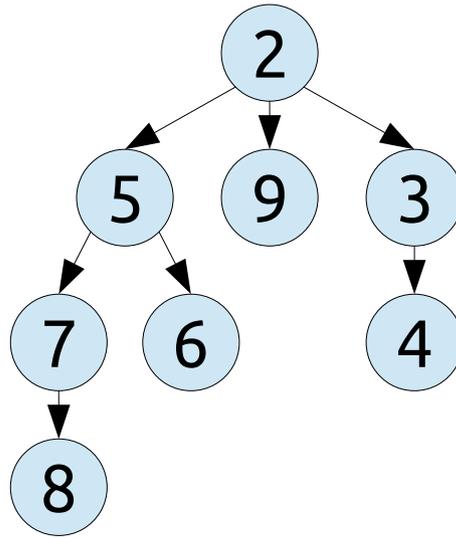


Lazy Binomial Heap

Order 2


Order 1

Order 0



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

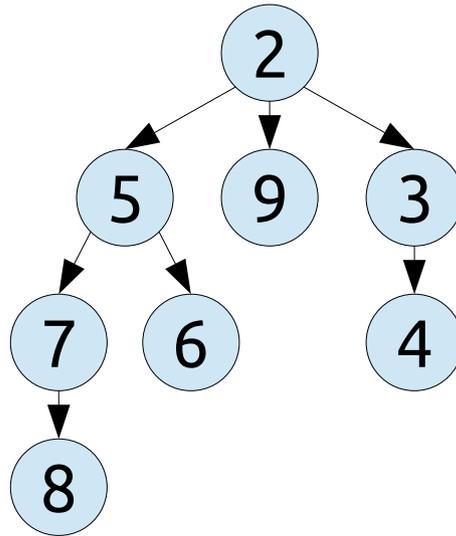


Lazy Binomial Heap

Order 2


Order 1

Order 0



Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap


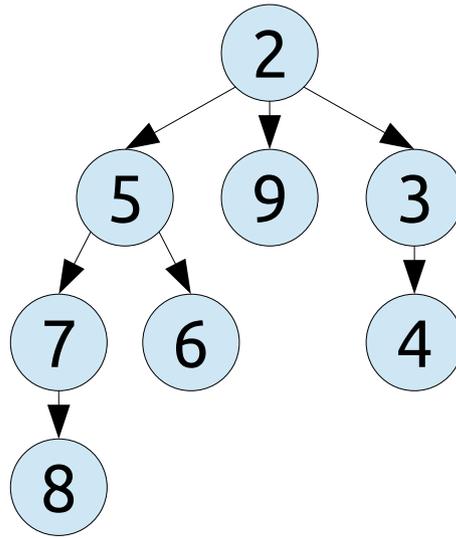


Lazy Binomial Heap

Order 2


Order 1

Order 0

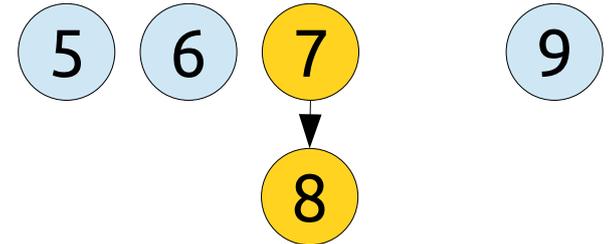

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap


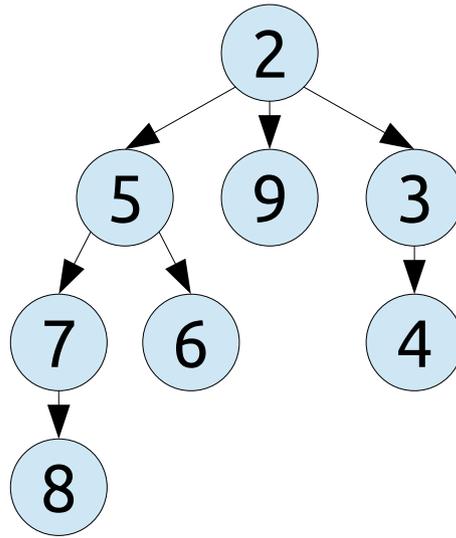


Lazy Binomial Heap

Order 2


Order 1

Order 0



Draw what happens after performing an *extract-min* in each binomial heap.

Eager Binomial Heap


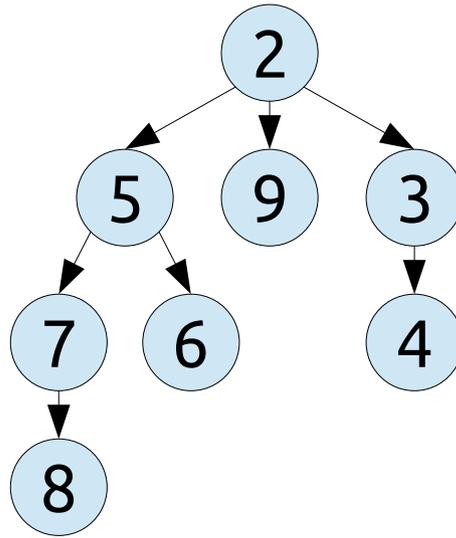


Lazy Binomial Heap

Order 2


Order 1

Order 0



Draw what happens after performing an *extract-min* in each binomial heap.

Eager Binomial Heap

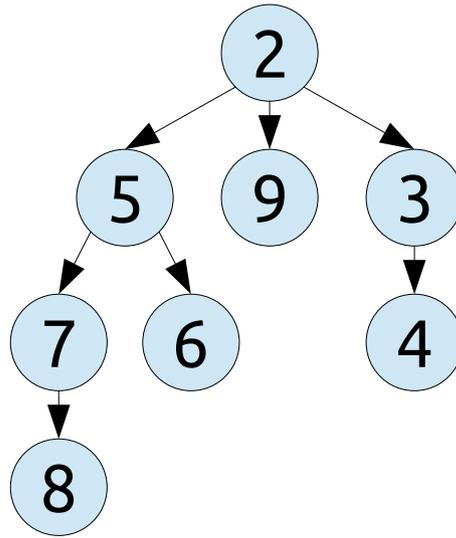


Lazy Binomial Heap

Order 2


Order 1

Order 0



Draw what happens after performing an *extract-min* in each binomial heap.

Eager Binomial Heap


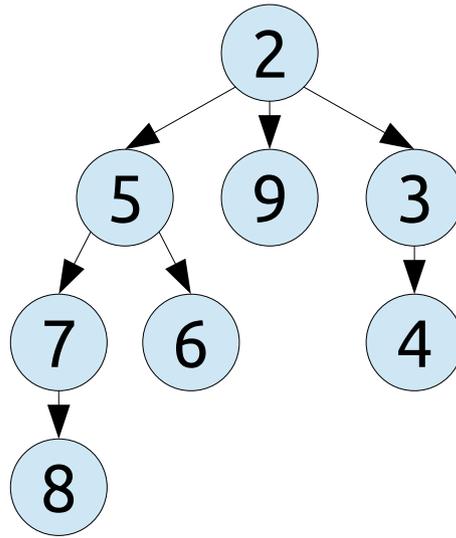


Lazy Binomial Heap

Order 2


Order 1

Order 0



Draw what happens after performing an *extract-min* in each binomial heap.

Eager Binomial Heap

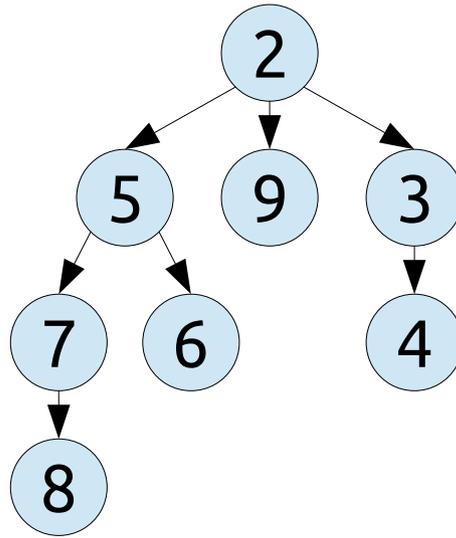


Lazy Binomial Heap

Order 2


Order 1

Order 0

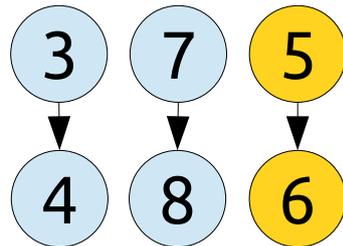

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

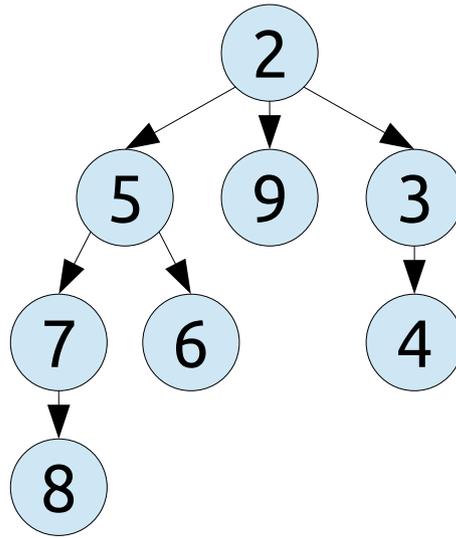


Lazy Binomial Heap

Order 2


Order 1

Order 0

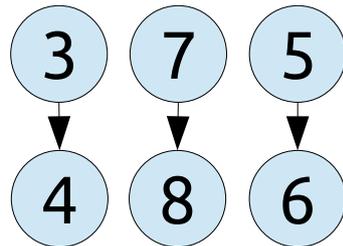

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

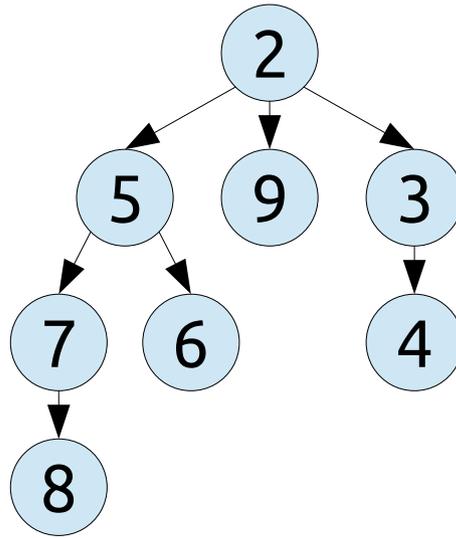


Lazy Binomial Heap

Order 2


Order 1

Order 0

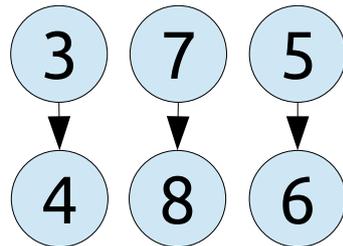

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

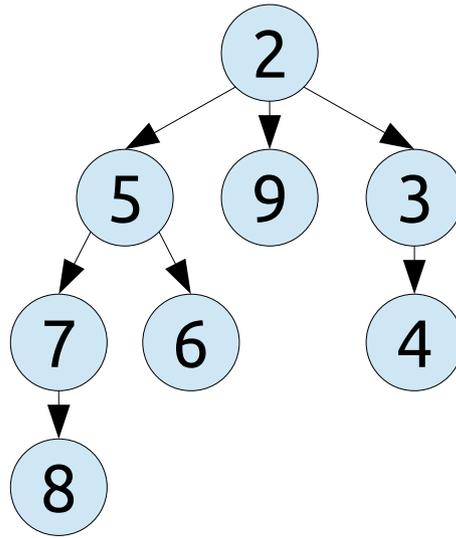


Lazy Binomial Heap

Order 2


Order 1

Order 0

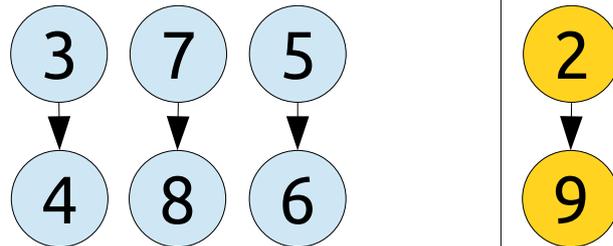

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

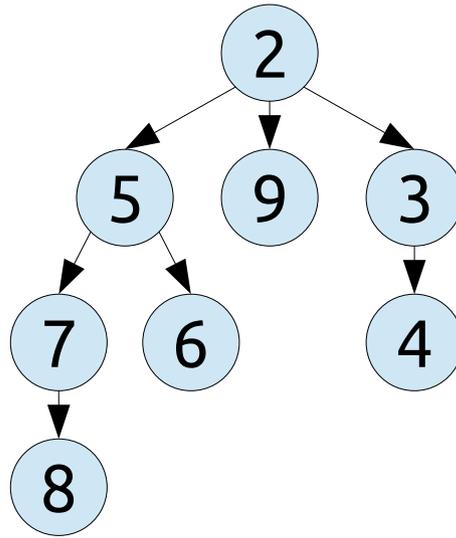


Lazy Binomial Heap

Order 2


Order 1

Order 0

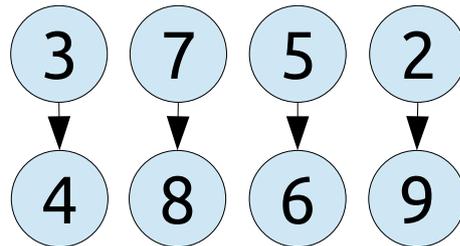

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

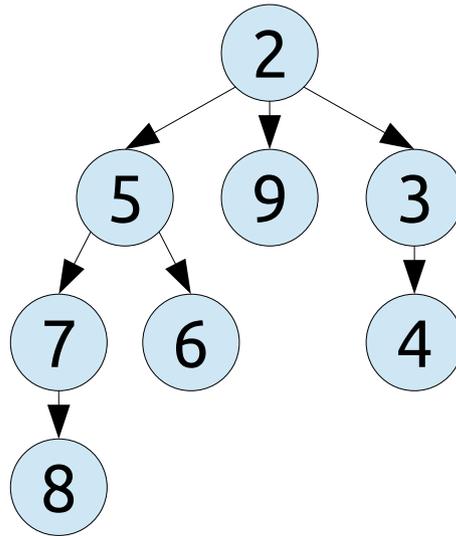


Lazy Binomial Heap

Order 2


Order 1

Order 0

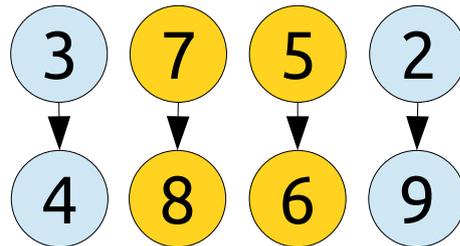

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

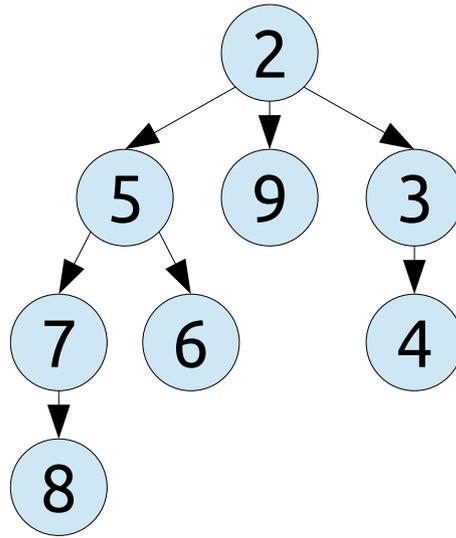


Lazy Binomial Heap

Order 2


Order 1

Order 0

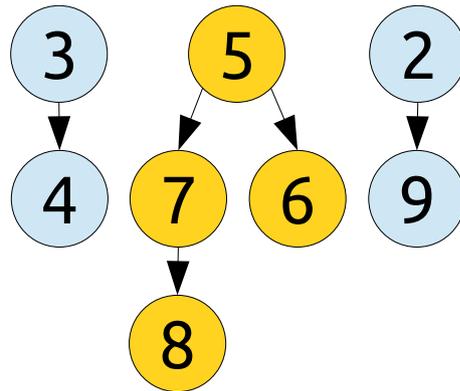


Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

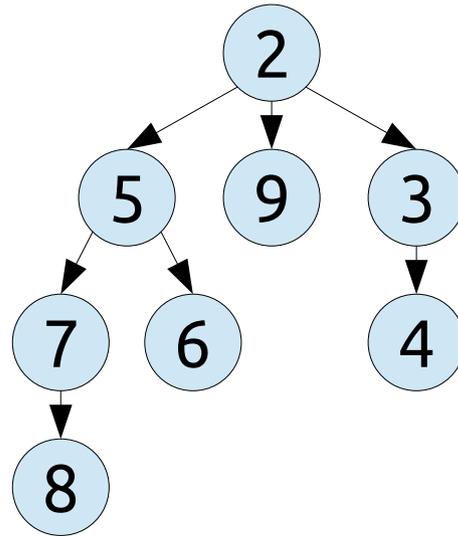

Lazy Binomial Heap

Order 2

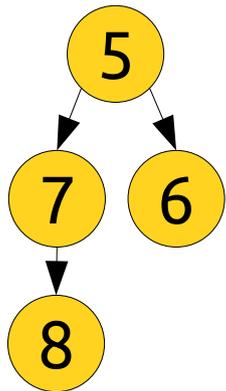


Order 1



Order 0


Draw what happens after performing an *extract-min* in each binomial heap.

Eager Binomial Heap

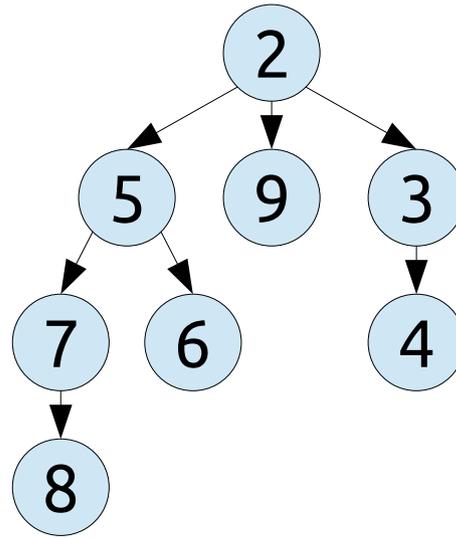

Lazy Binomial Heap

Order 2

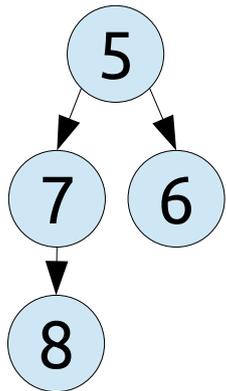


Order 1



Order 0


Draw what happens after performing an *extract-min* in each binomial heap.

Eager Binomial Heap

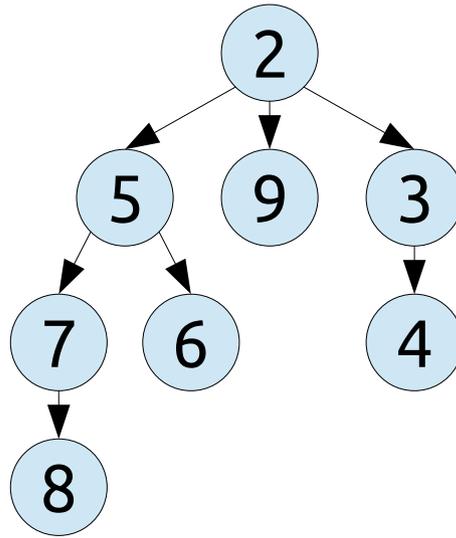

Lazy Binomial Heap

Order 2

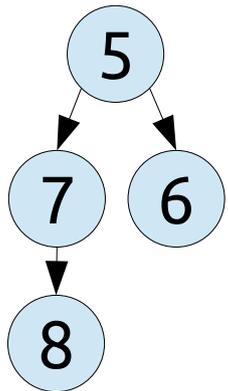


Order 1



Order 0


Draw what happens after performing an *extract-min* in each binomial heap.

Eager Binomial Heap

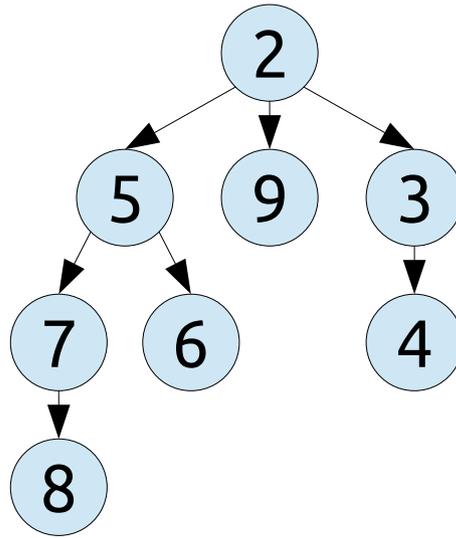


Lazy Binomial Heap

Order 2

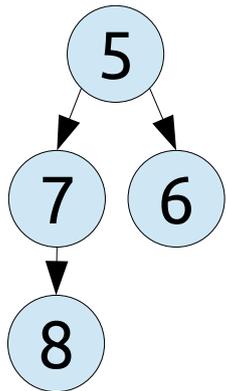


Order 1

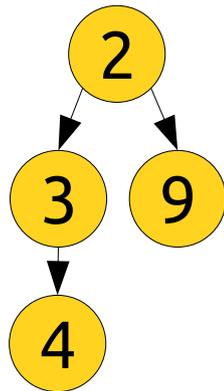

Order 0

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

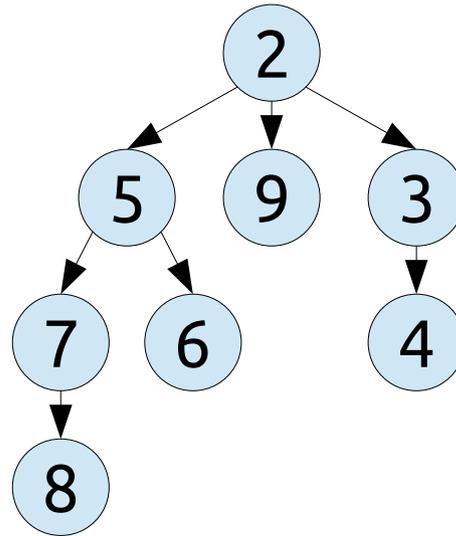


Lazy Binomial Heap

Order 2


Order 1

Order 0

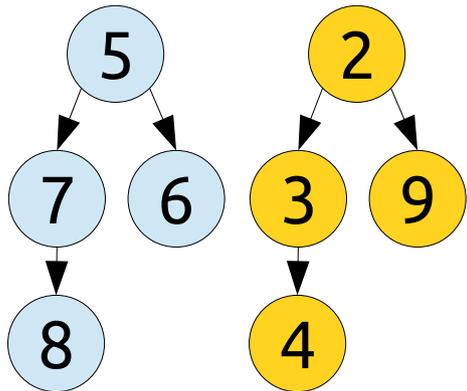


Draw what happens after performing an *extract-min* in each binomial heap.

Eager Binomial Heap

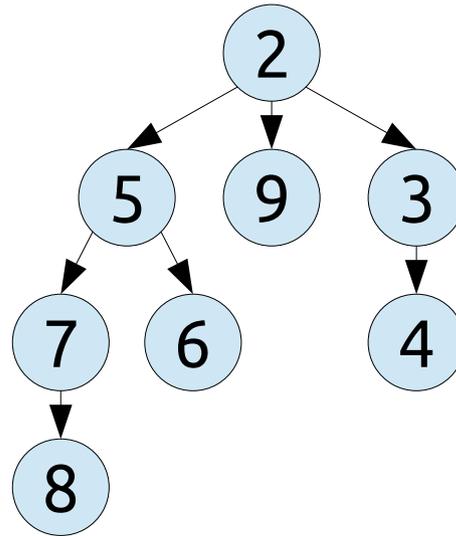

Lazy Binomial Heap

Order 2

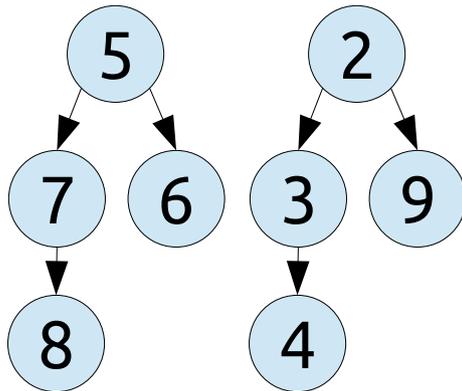


Order 1

Order 0

Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

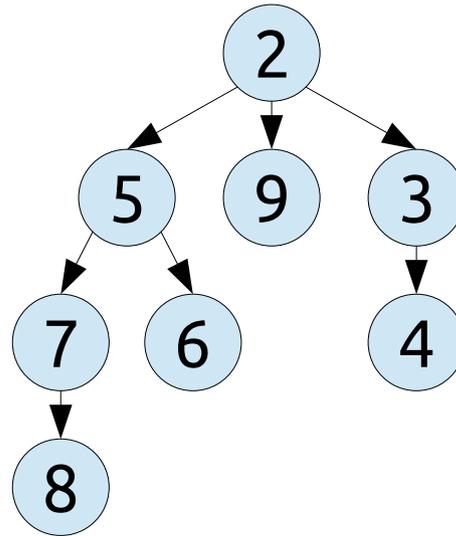


Lazy Binomial Heap

Order 2


Order 1

Order 0

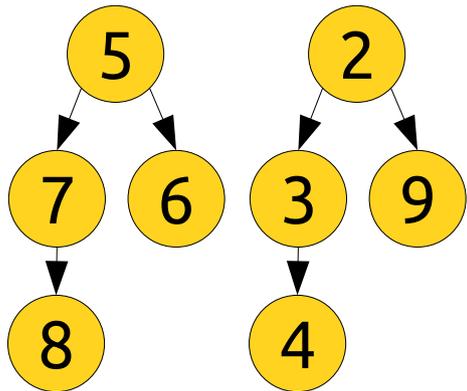


Draw what happens after performing an *extract-min* in each binomial heap.

Eager Binomial Heap

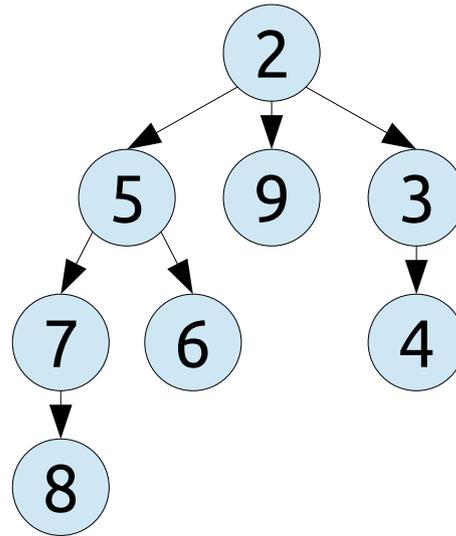


Lazy Binomial Heap

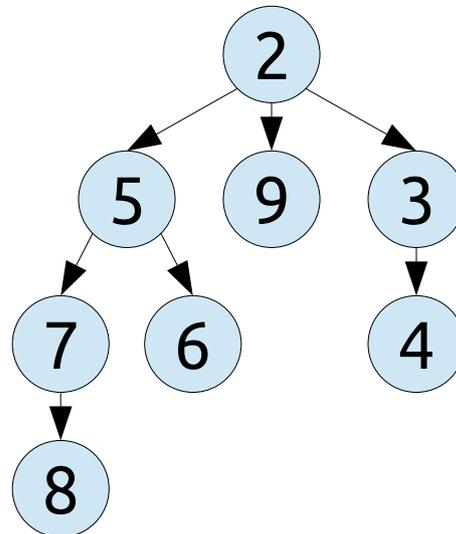


Draw what happens after performing an ***extract-min*** in each binomial heap.

Eager Binomial Heap

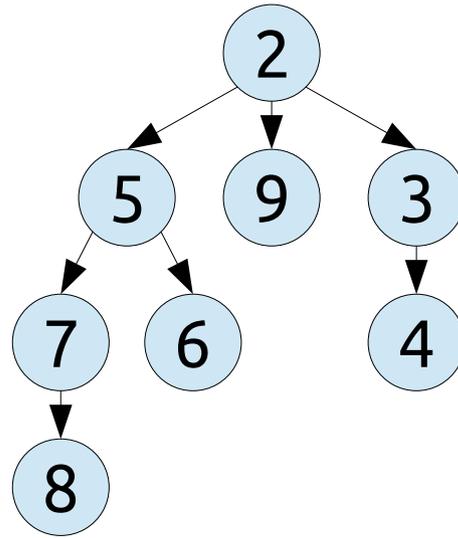


Lazy Binomial Heap

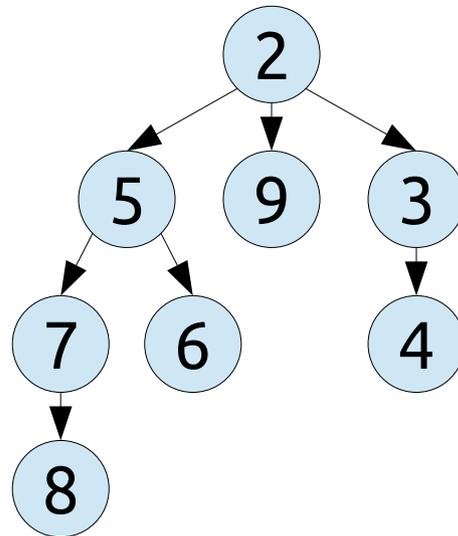


Let's *enqueue* 10, 11, and 12 into both heaps.

Eager Binomial Heap

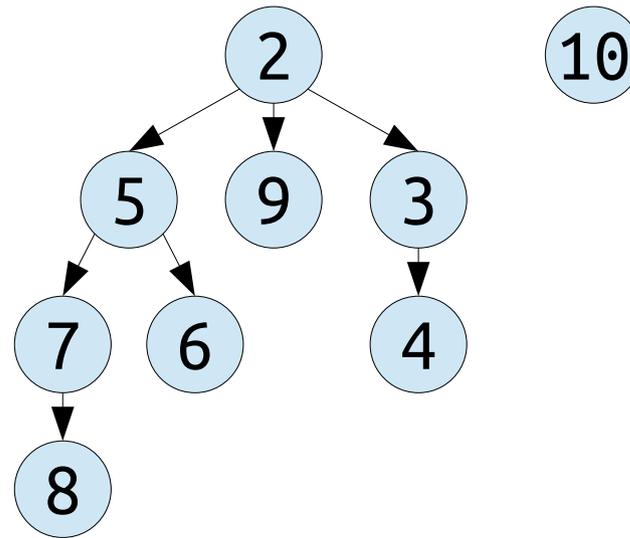


Lazy Binomial Heap

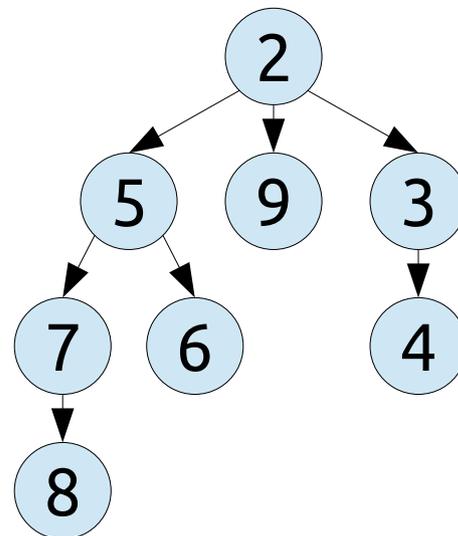


Let's *enqueue* 10, 11, and 12 into both heaps.

Eager Binomial Heap

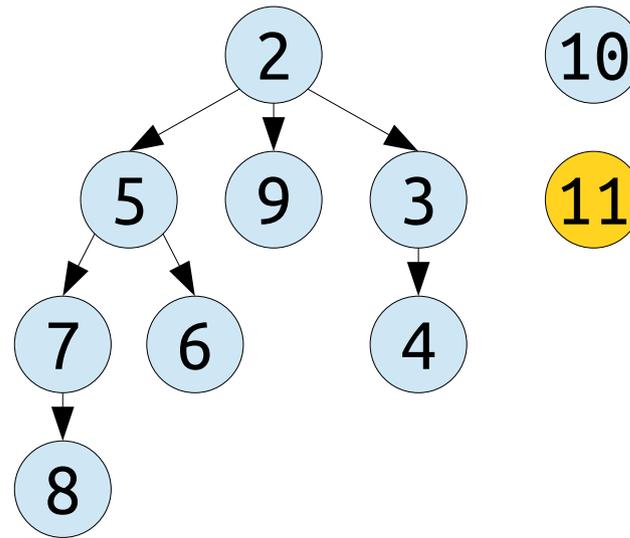


Lazy Binomial Heap

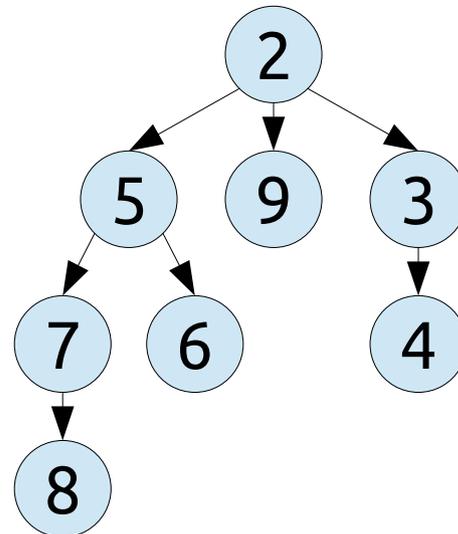


Let's *enqueue* 10, 11, and 12 into both heaps.

Eager Binomial Heap

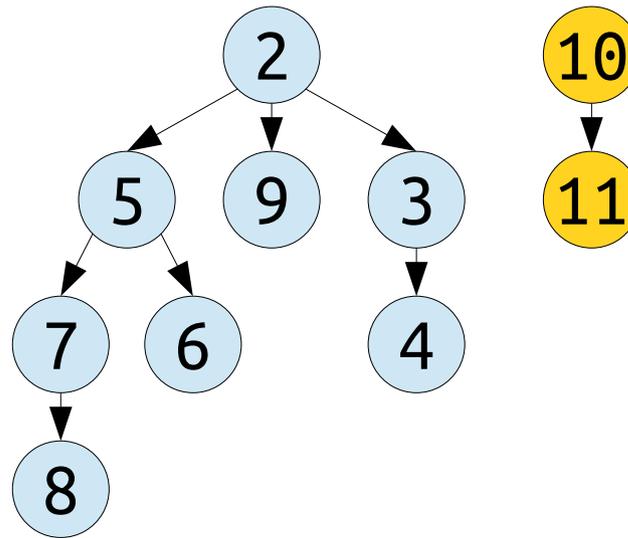


Lazy Binomial Heap

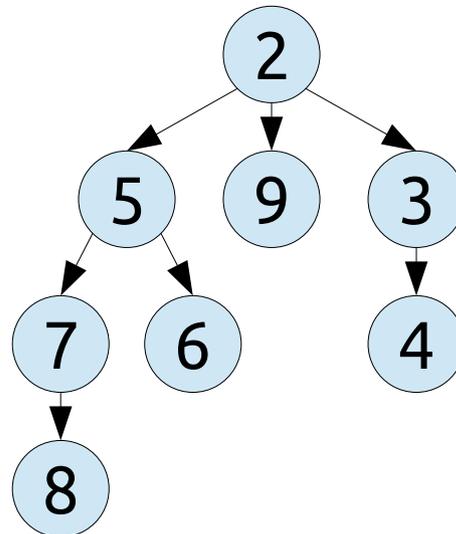


Let's *enqueue* 10, 11, and 12 into both heaps.

Eager Binomial Heap

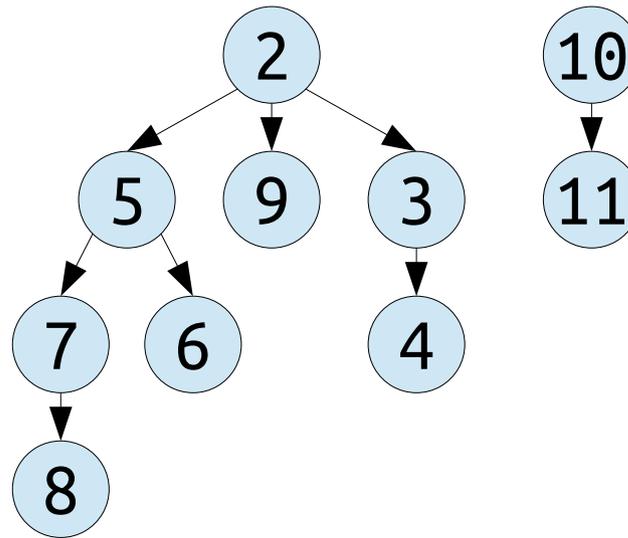


Lazy Binomial Heap

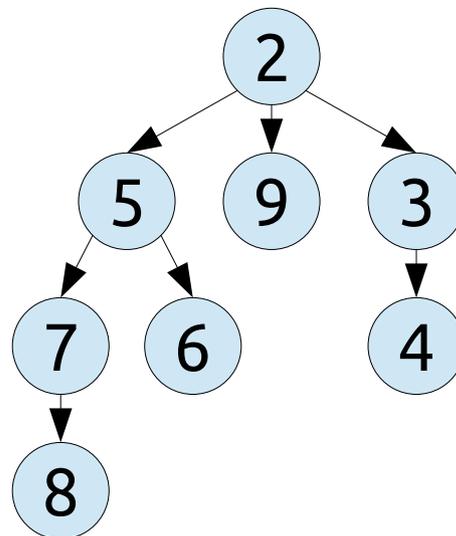


Let's *enqueue* 10, 11, and 12 into both heaps.

Eager Binomial Heap

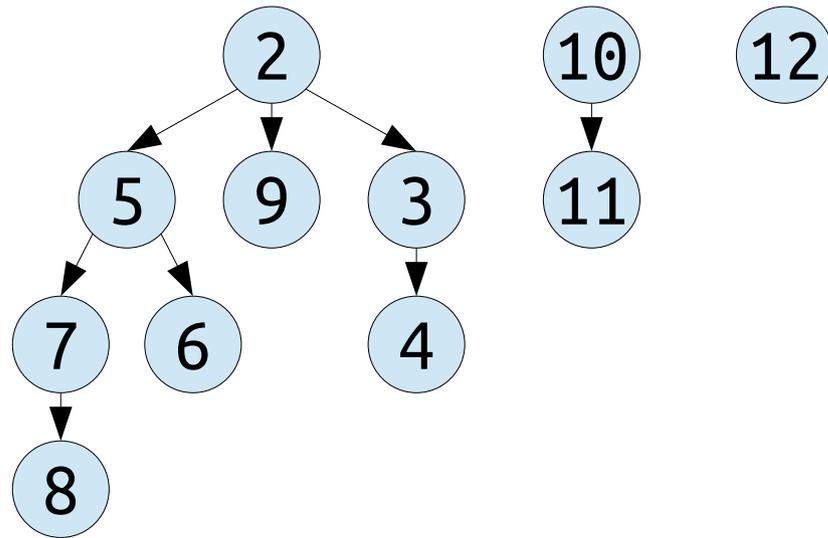


Lazy Binomial Heap

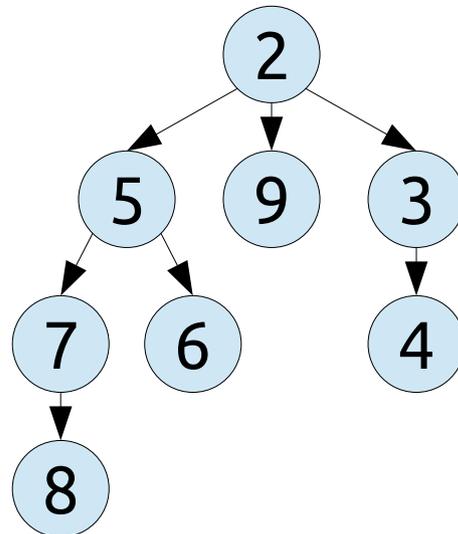


Let's *enqueue* 10, 11, and 12 into both heaps.

Eager Binomial Heap

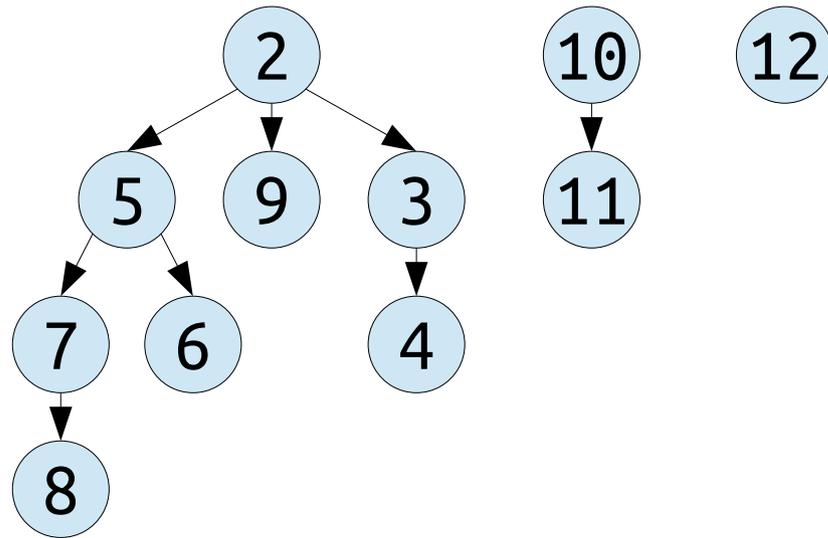


Lazy Binomial Heap

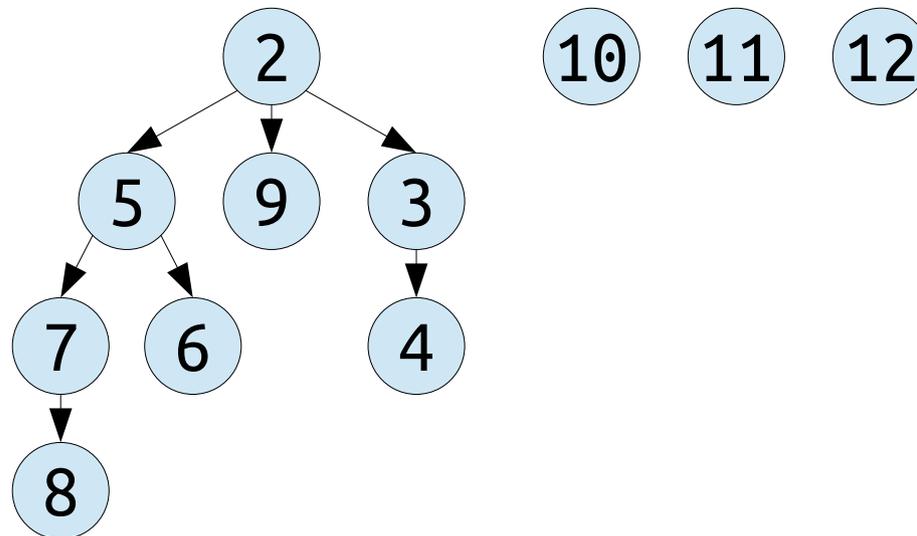


Let's *enqueue* 10, 11, and 12 into both heaps.

Eager Binomial Heap

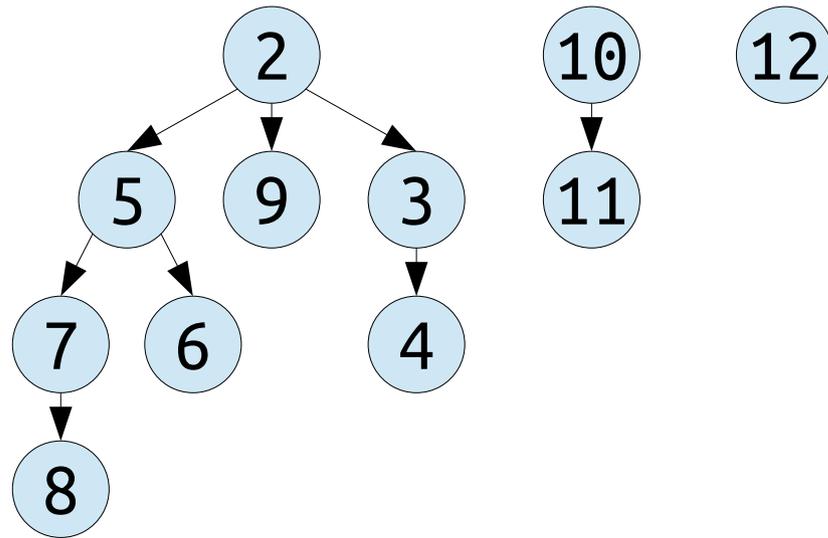


Lazy Binomial Heap

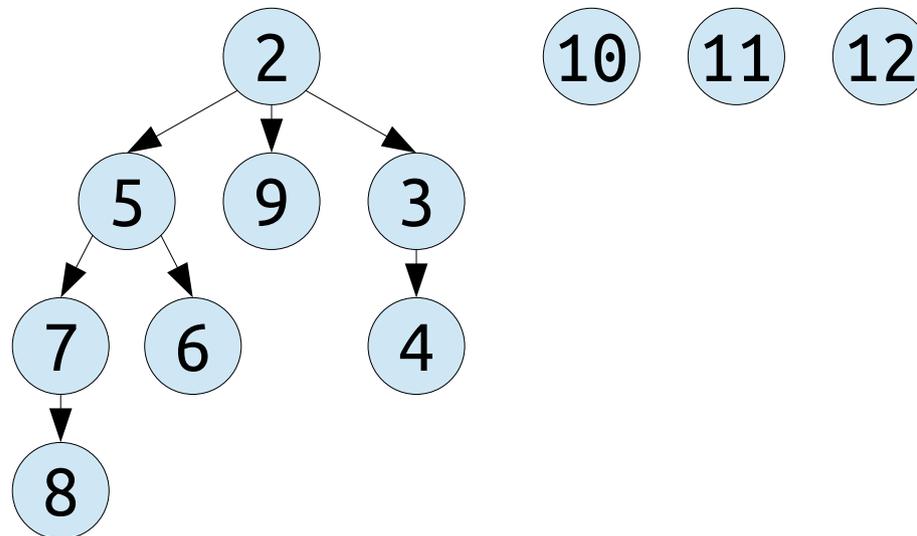


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

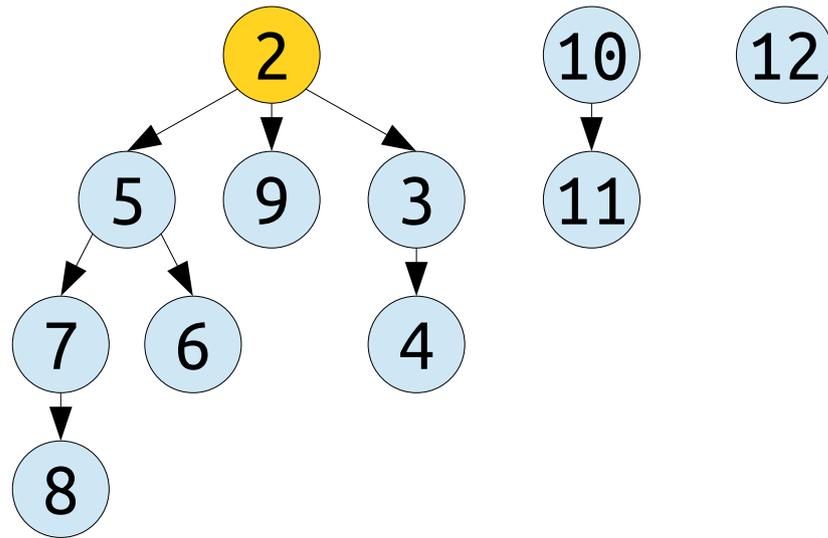


Lazy Binomial Heap

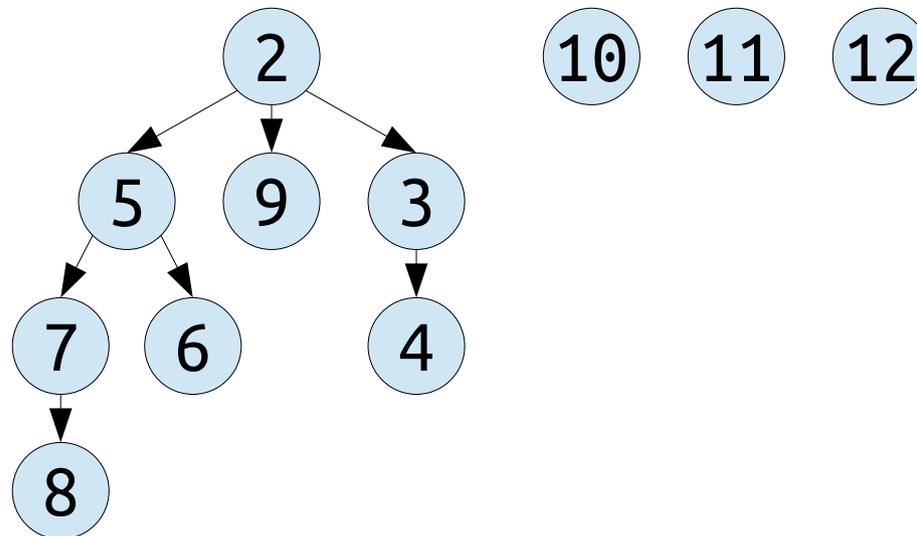


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

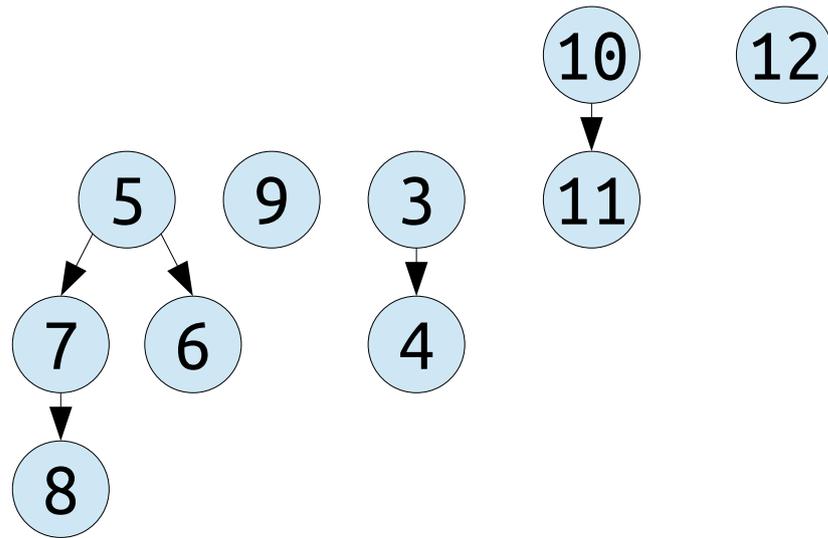


Lazy Binomial Heap

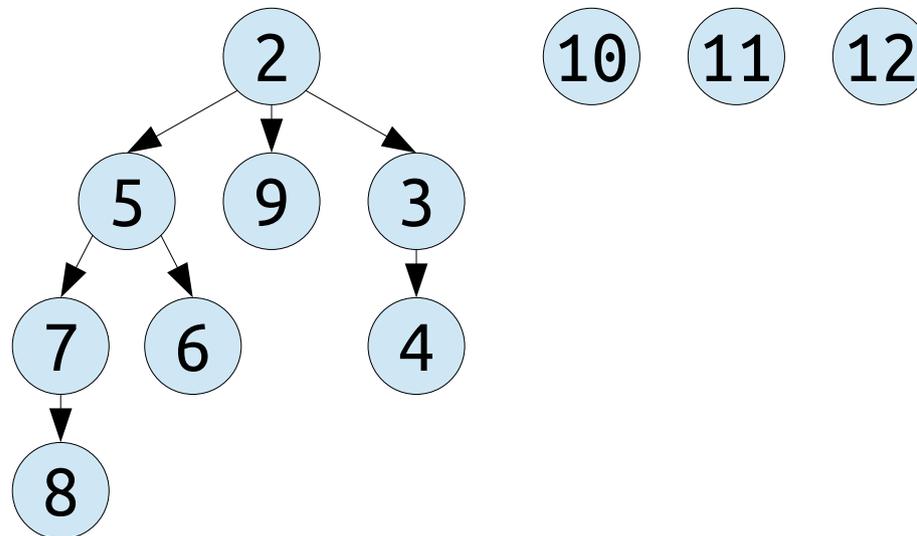


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

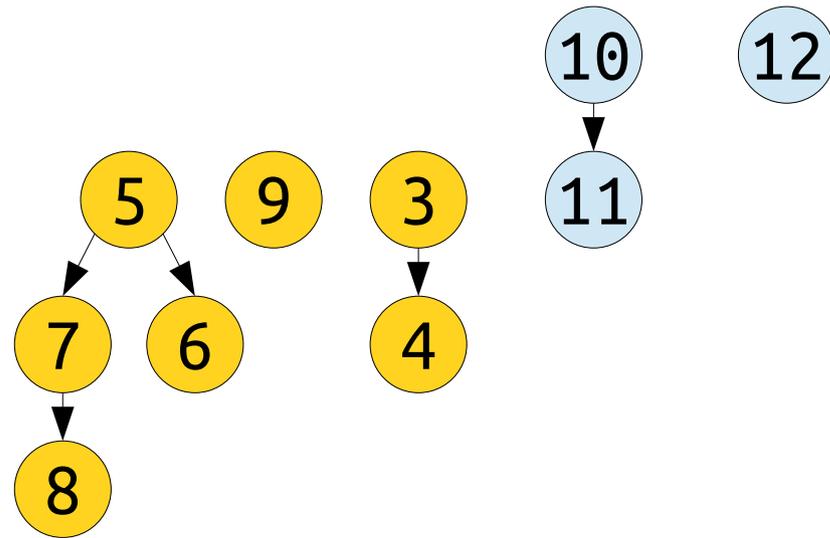


Lazy Binomial Heap

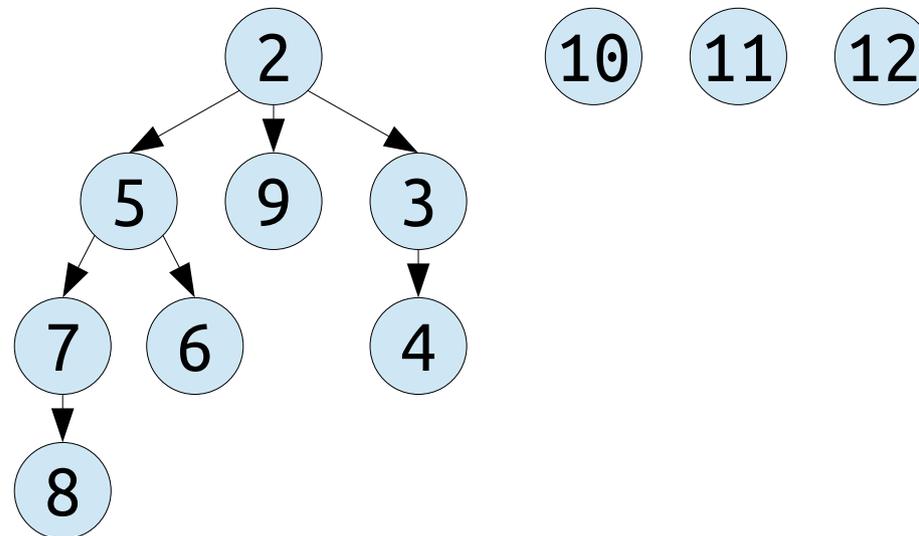


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

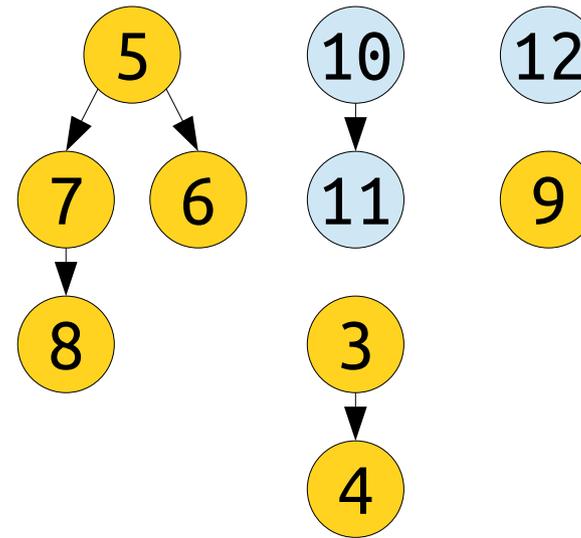


Lazy Binomial Heap

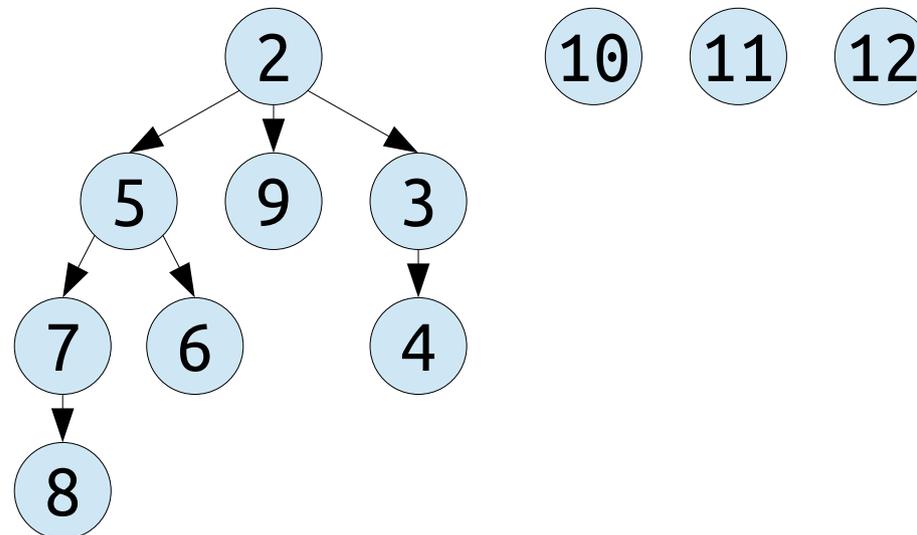


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

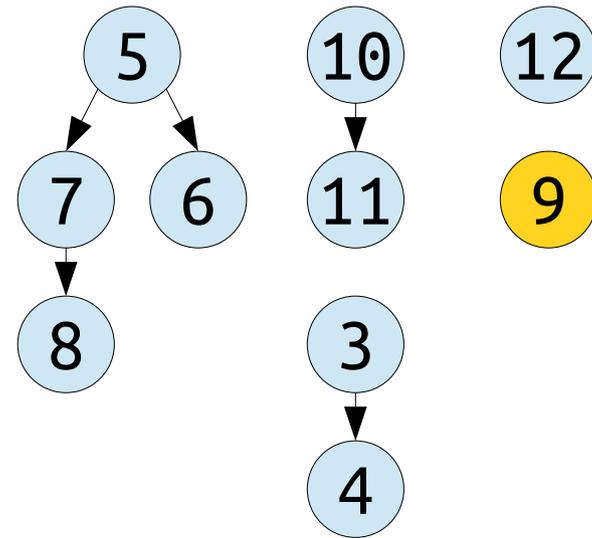


Lazy Binomial Heap

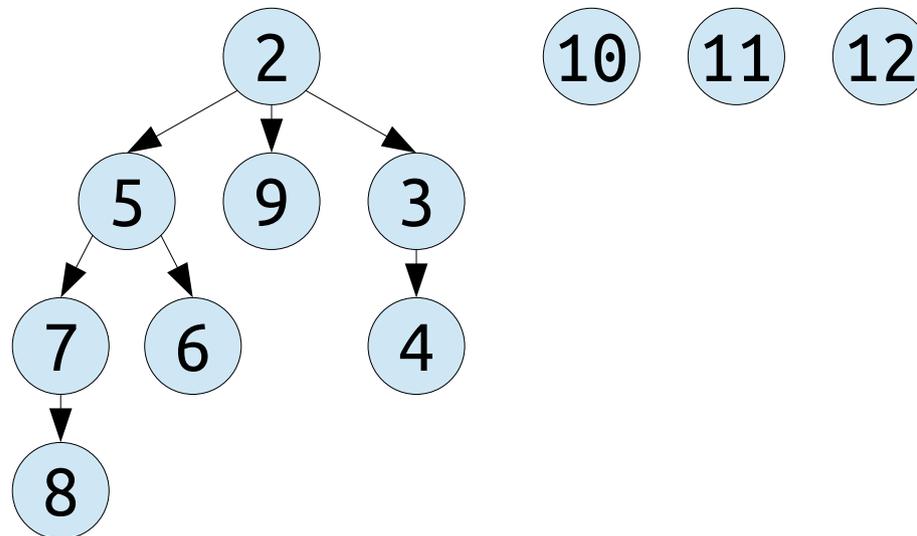


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

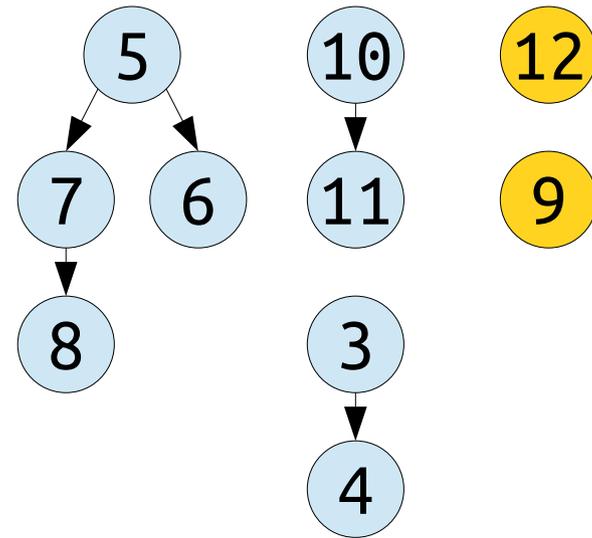


Lazy Binomial Heap

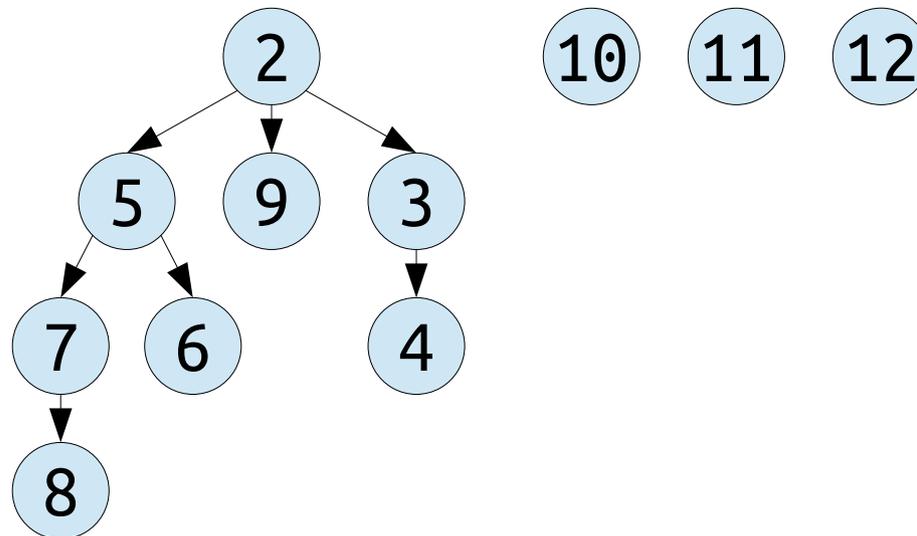


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

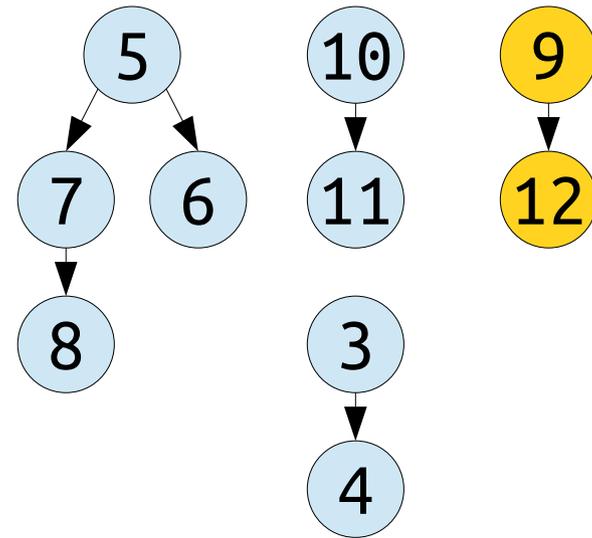


Lazy Binomial Heap

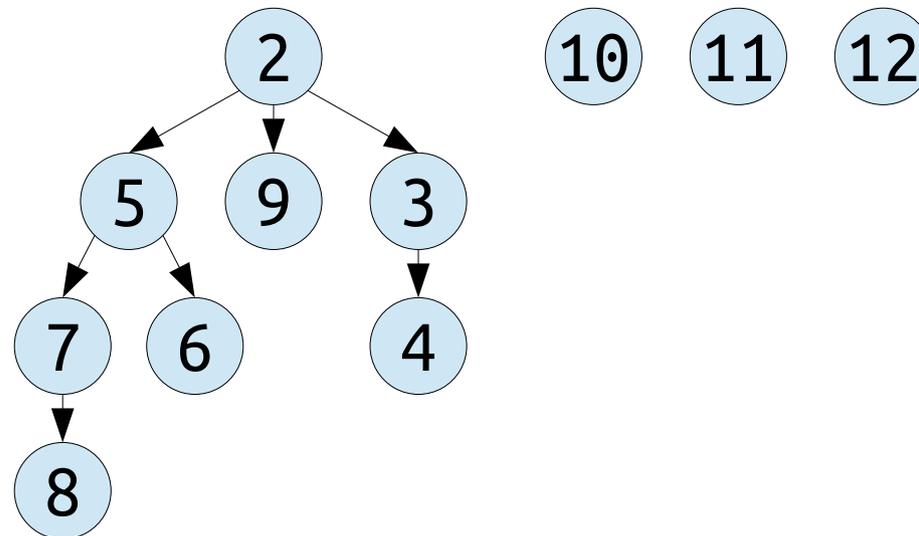


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

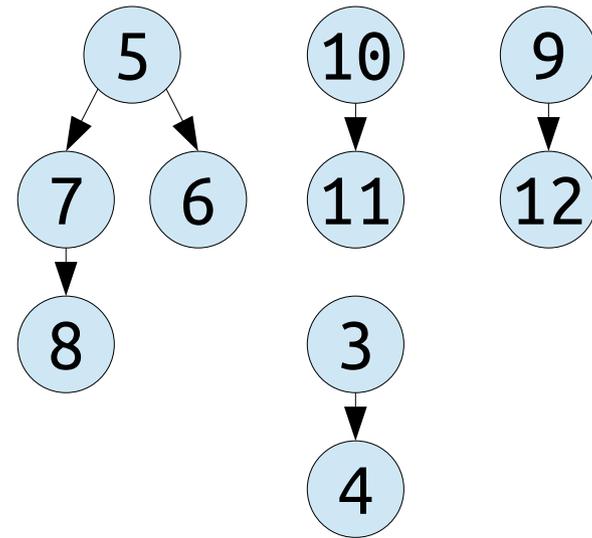


Lazy Binomial Heap

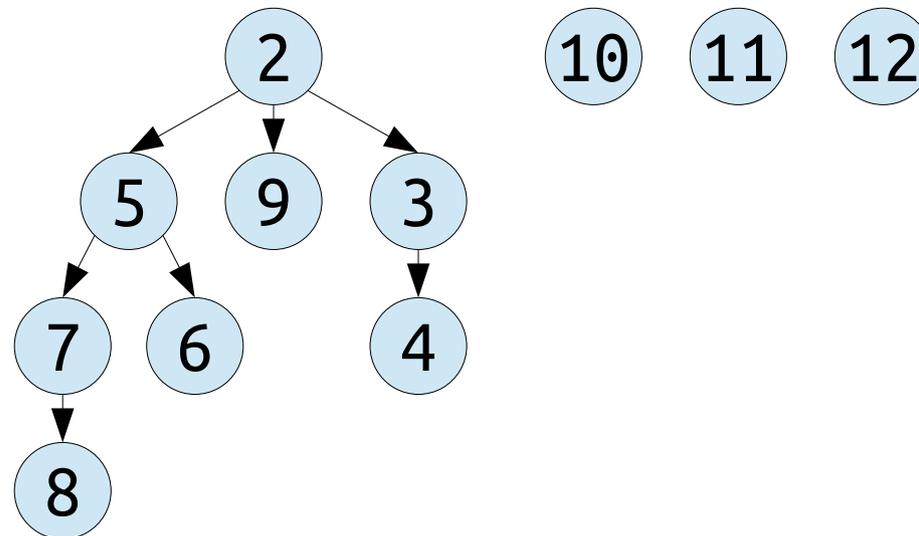


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

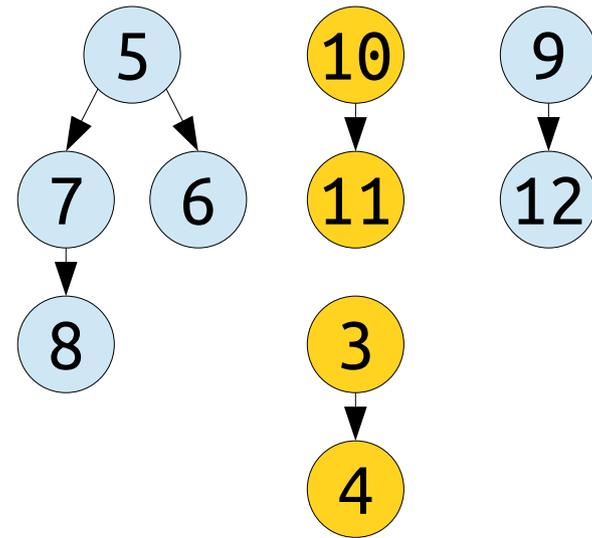


Lazy Binomial Heap

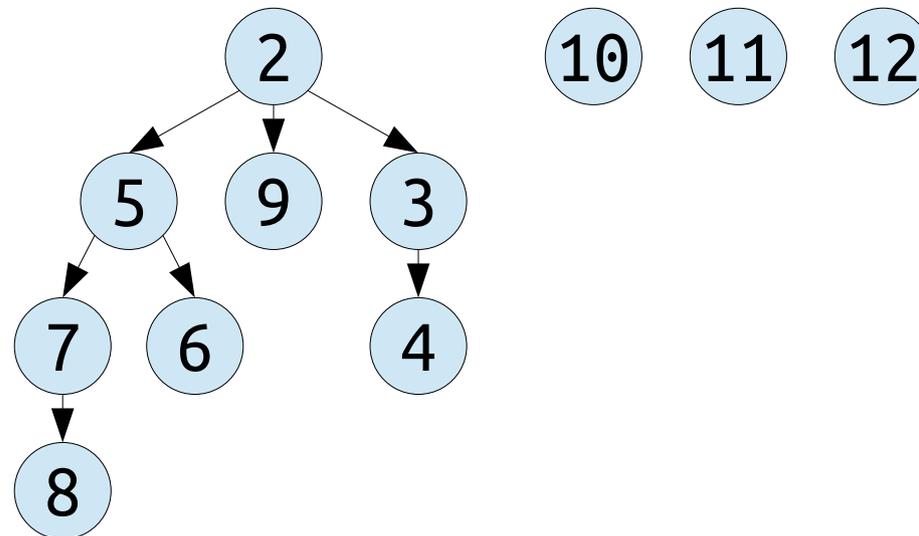


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

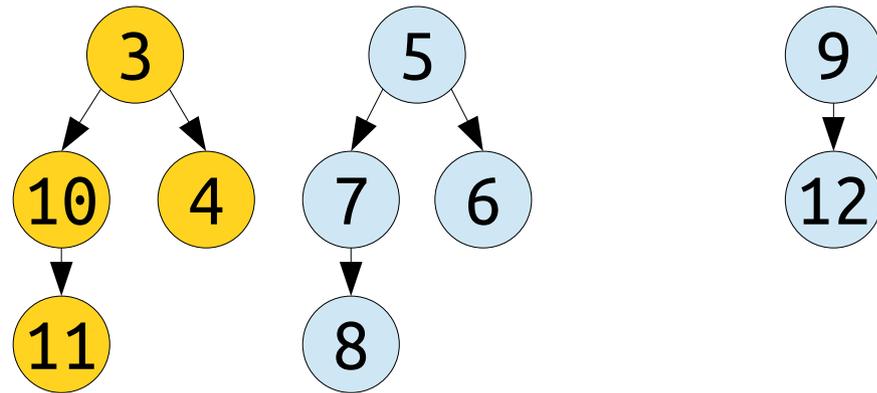


Lazy Binomial Heap

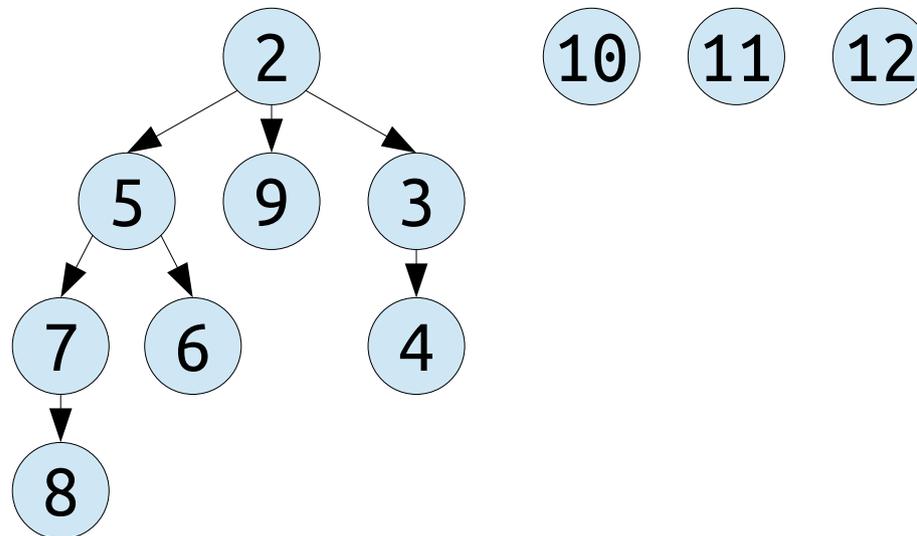


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

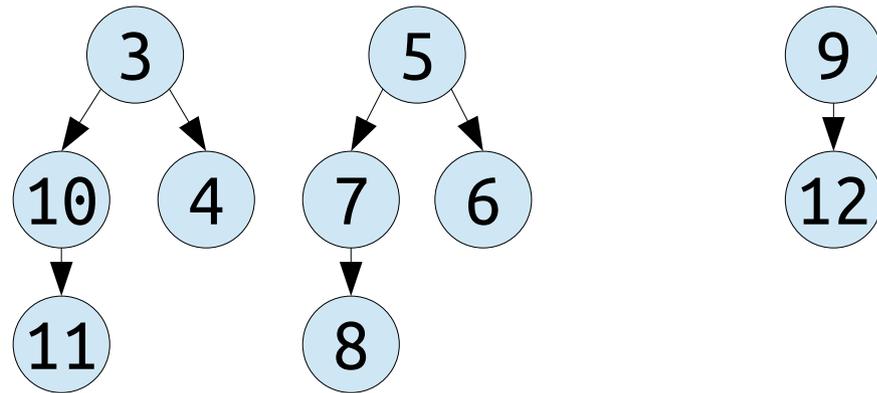


Lazy Binomial Heap

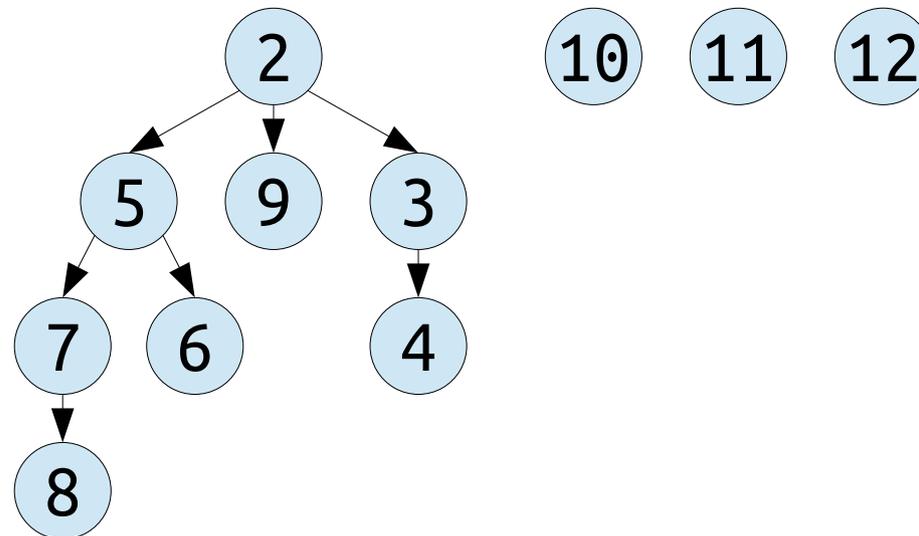


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

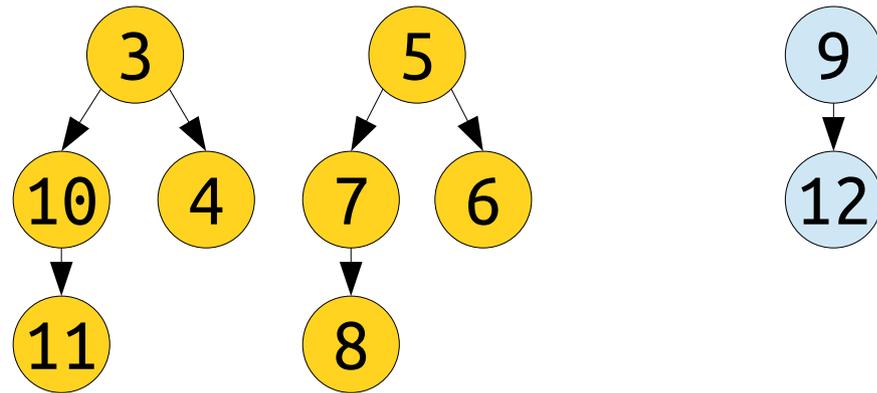


Lazy Binomial Heap

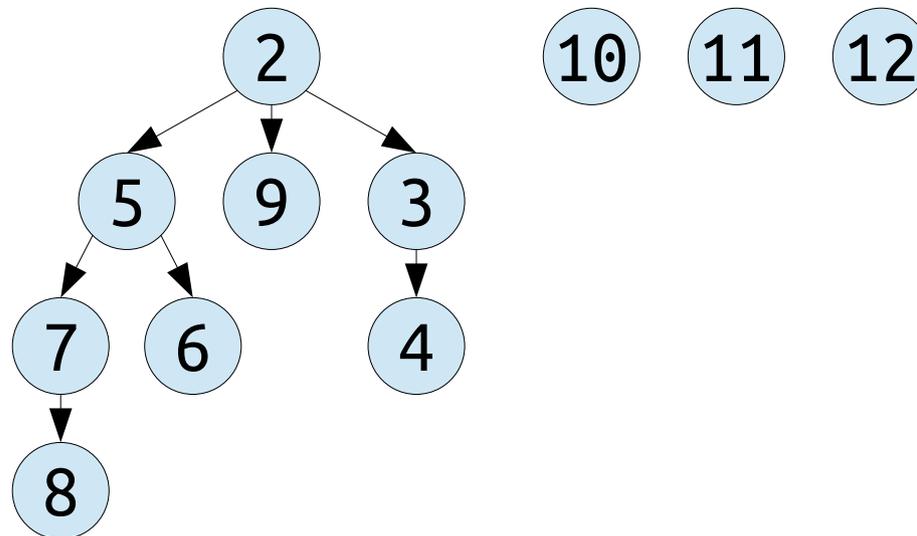


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

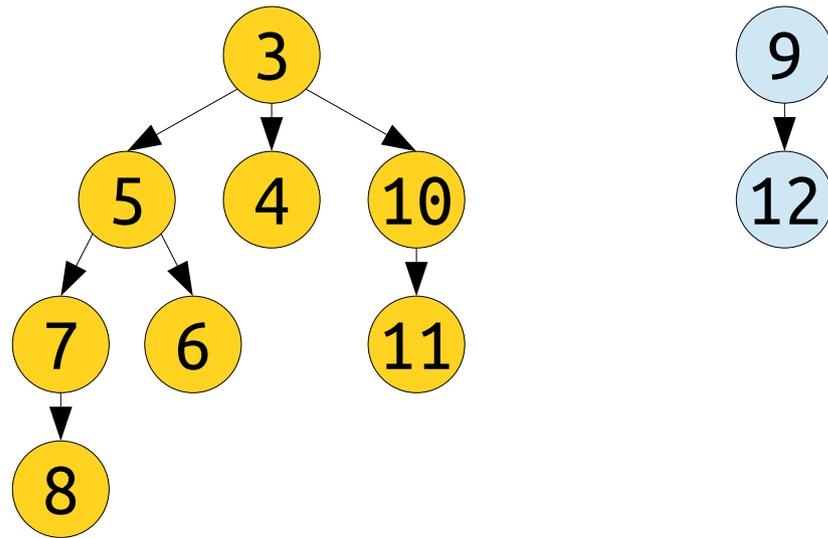


Lazy Binomial Heap

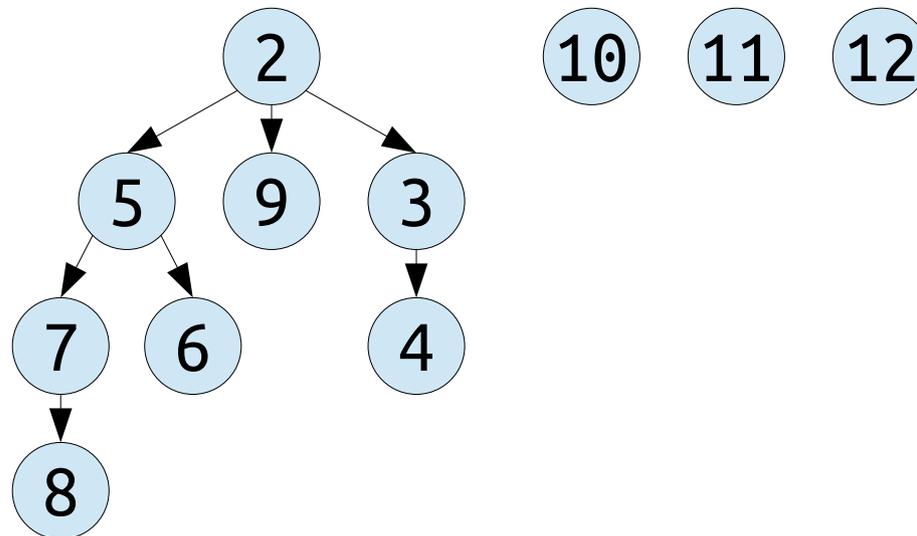


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

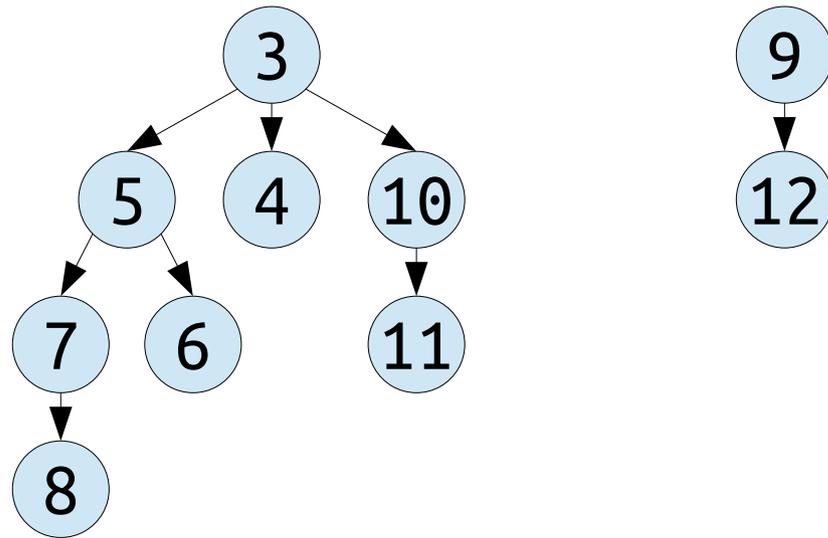


Lazy Binomial Heap

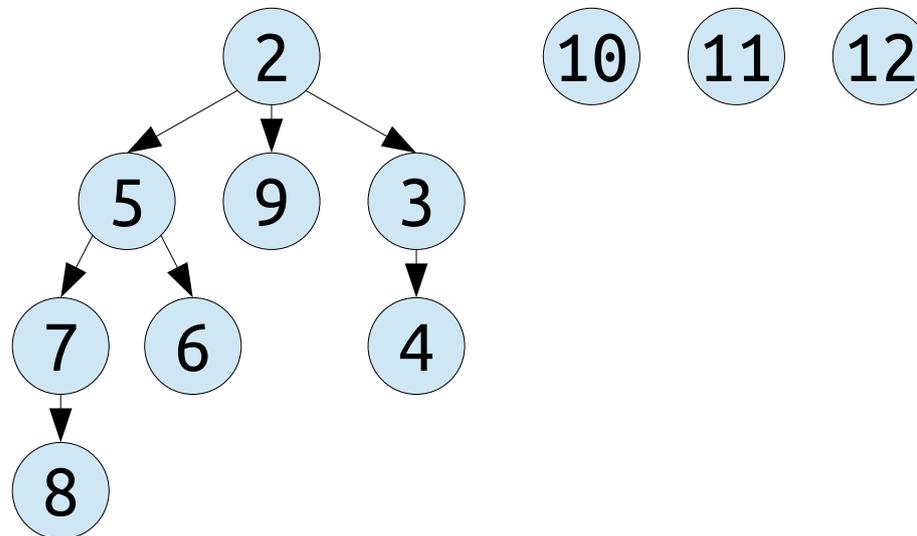


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

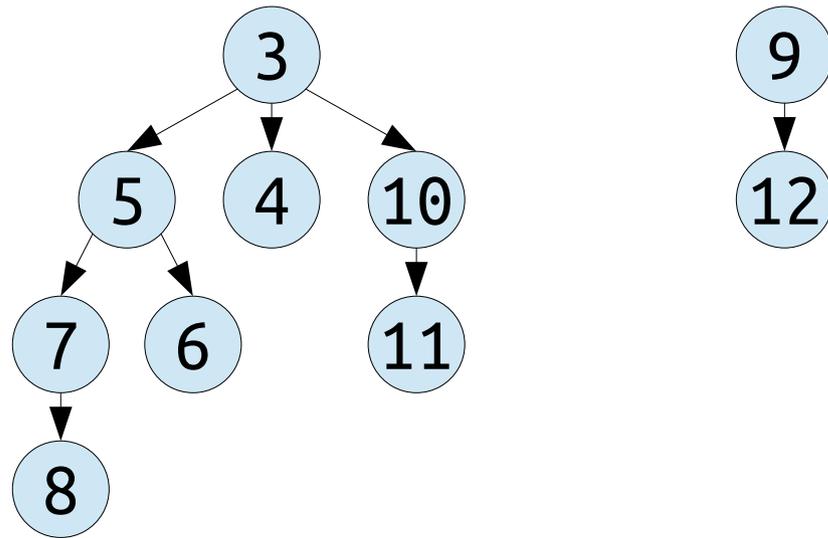


Lazy Binomial Heap

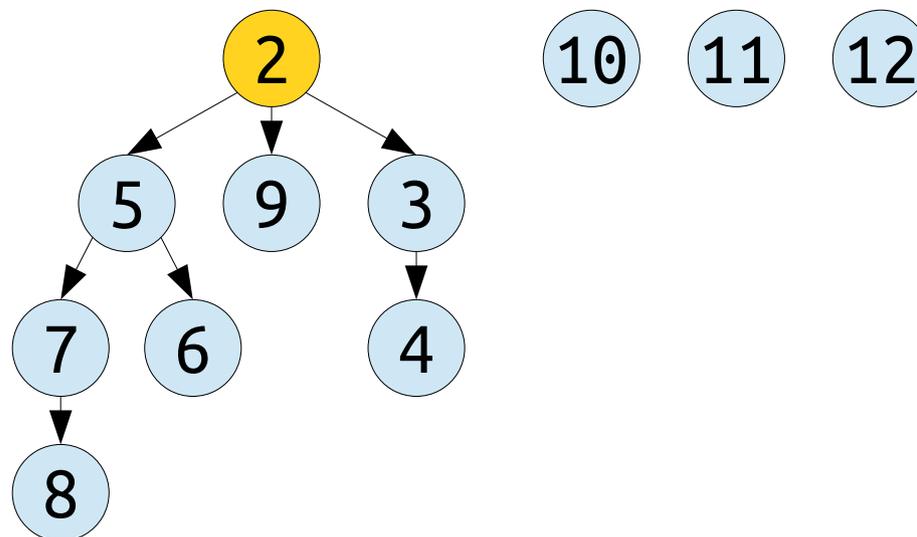


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

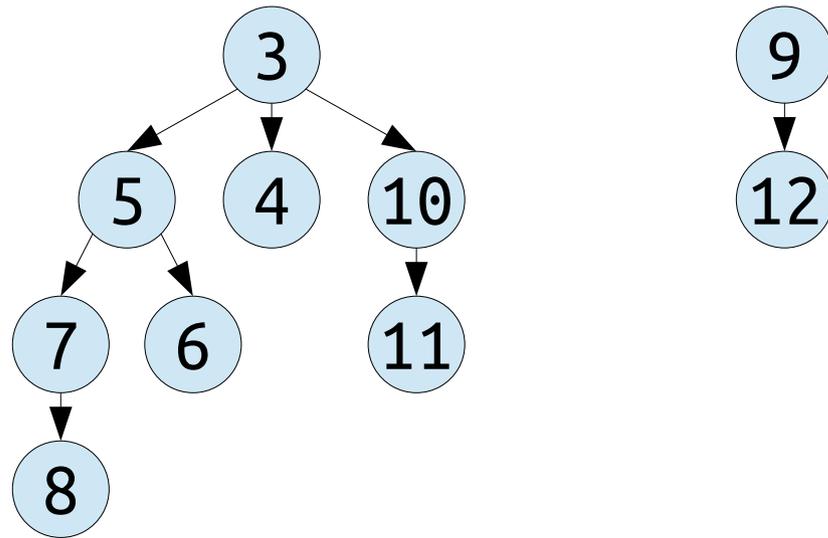


Lazy Binomial Heap

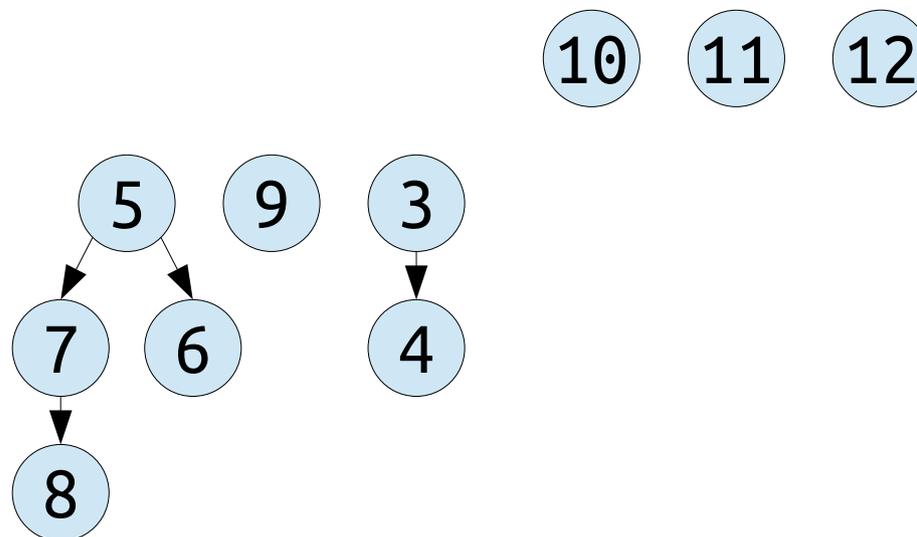


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

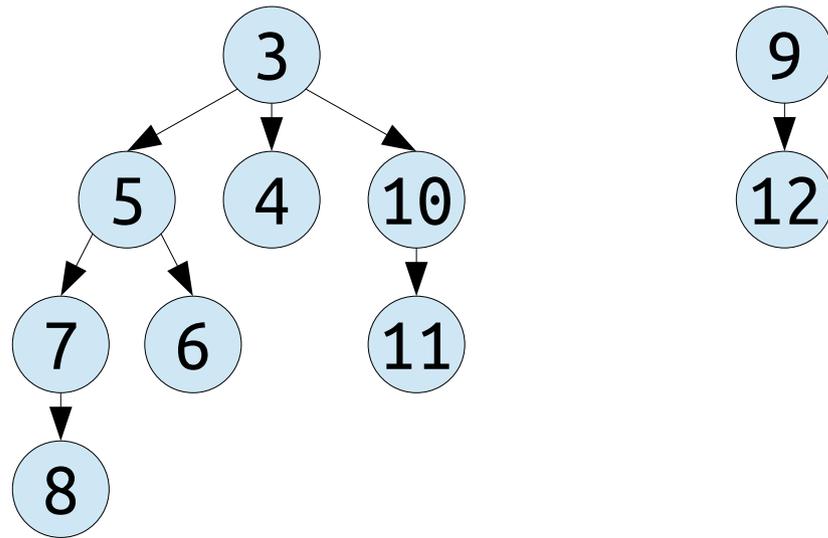


Lazy Binomial Heap

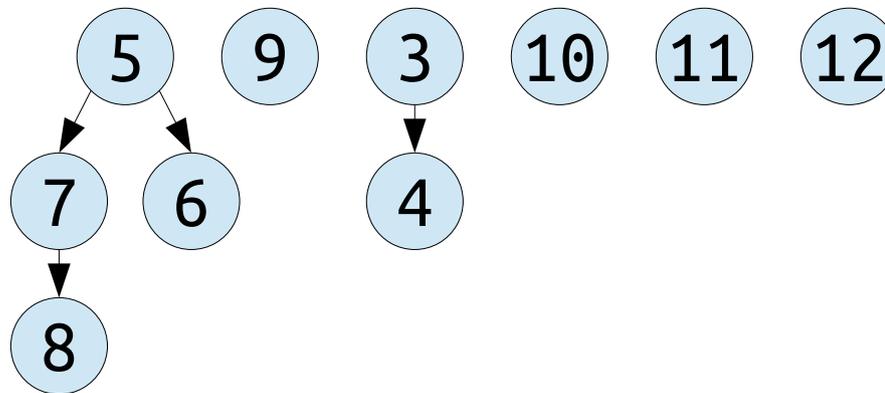


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

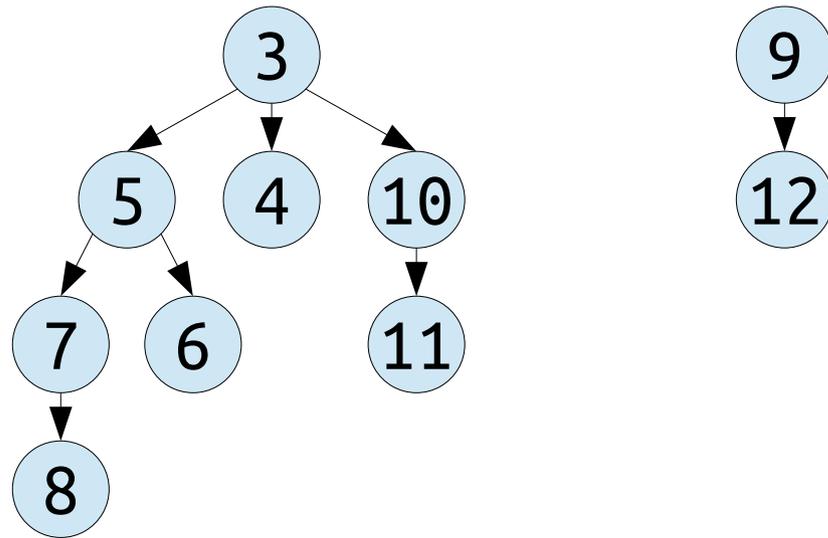


Lazy Binomial Heap

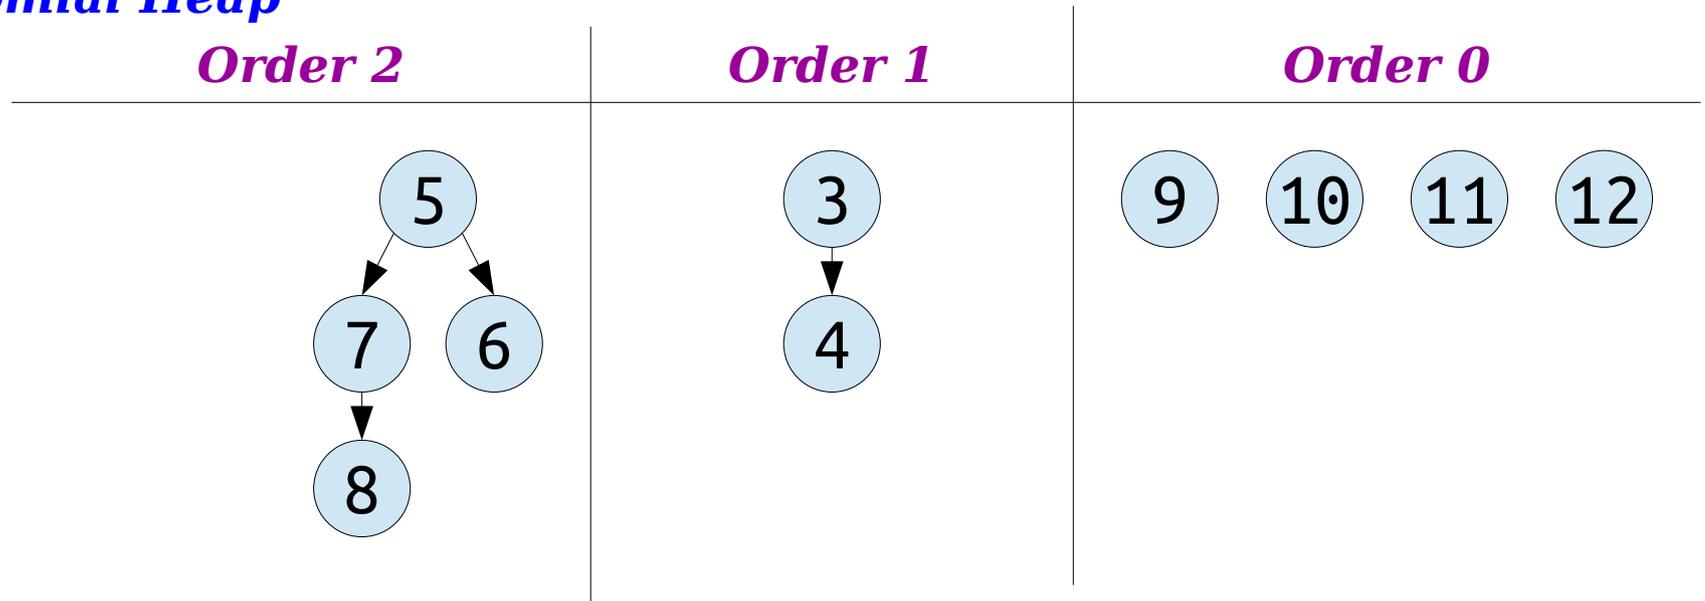


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

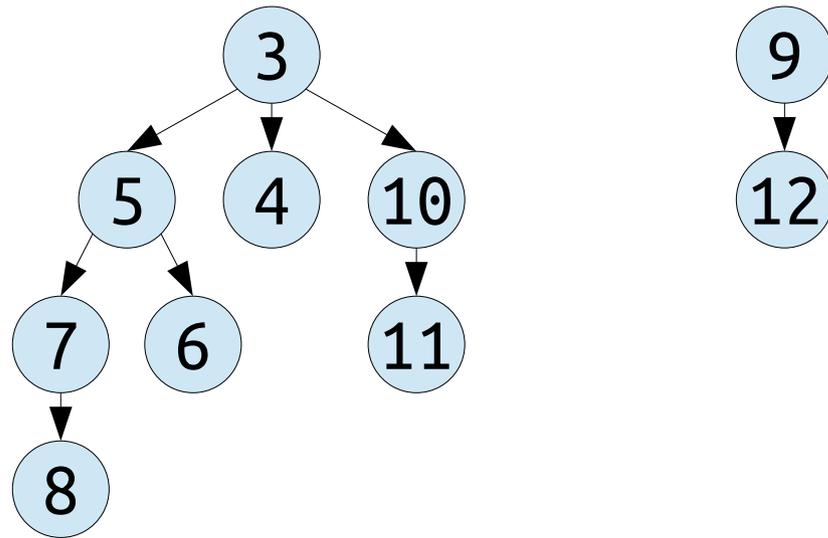


Lazy Binomial Heap

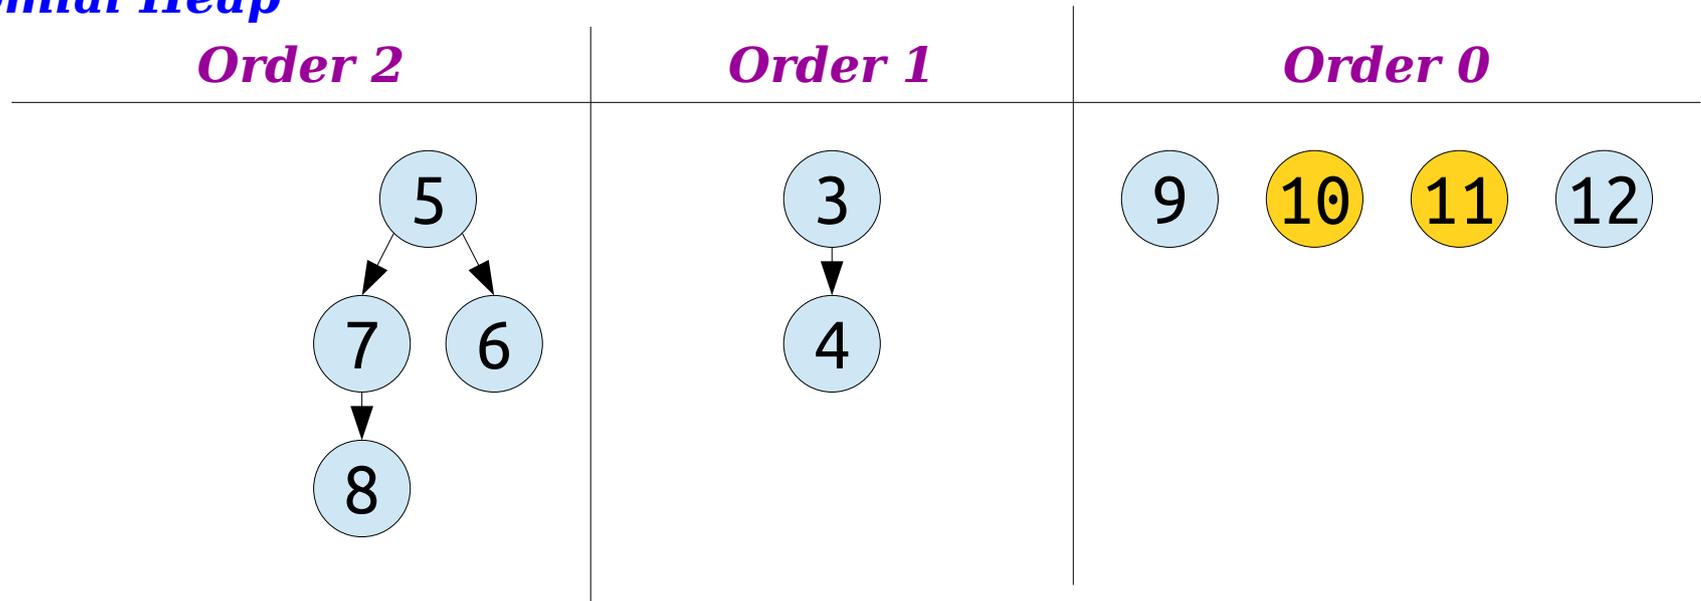


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

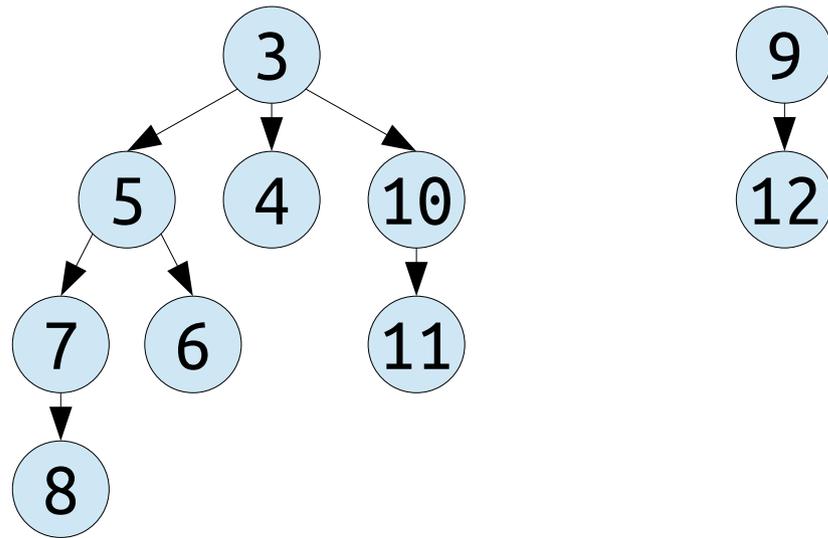


Lazy Binomial Heap

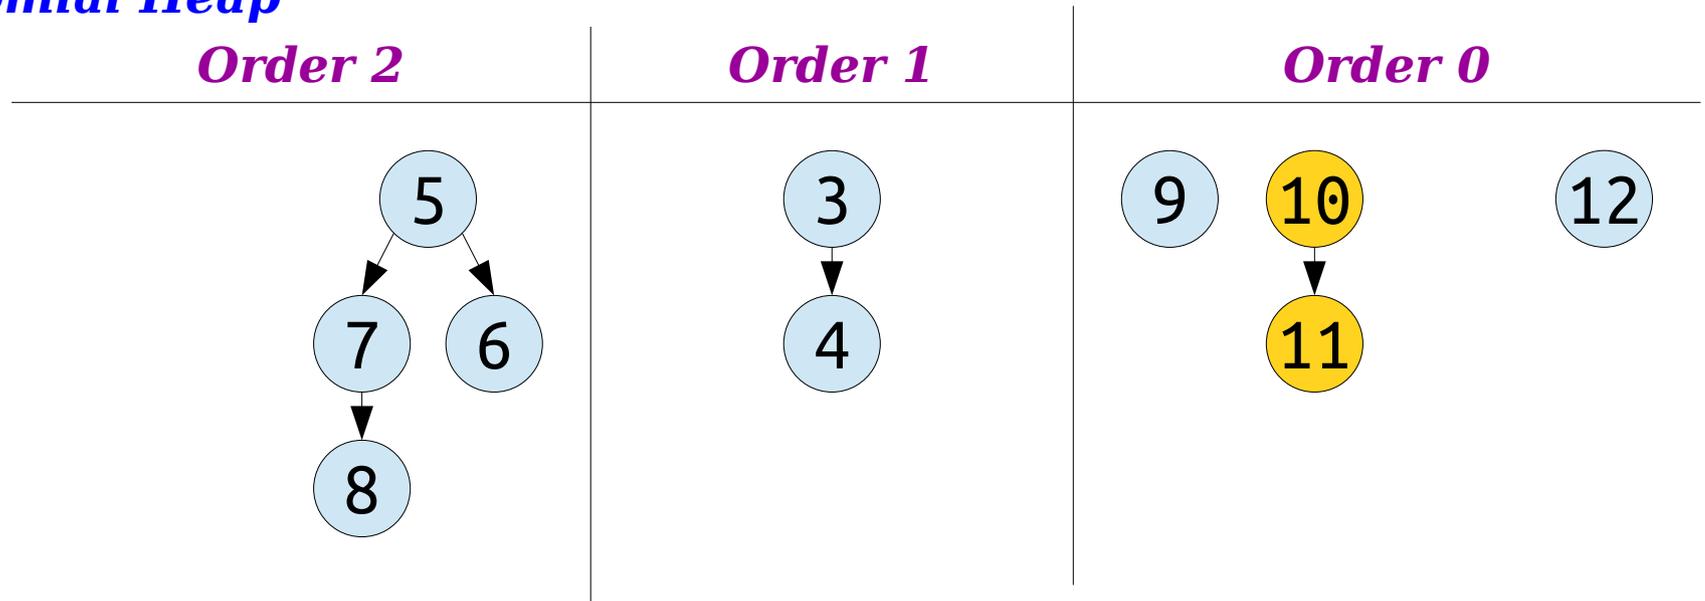


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

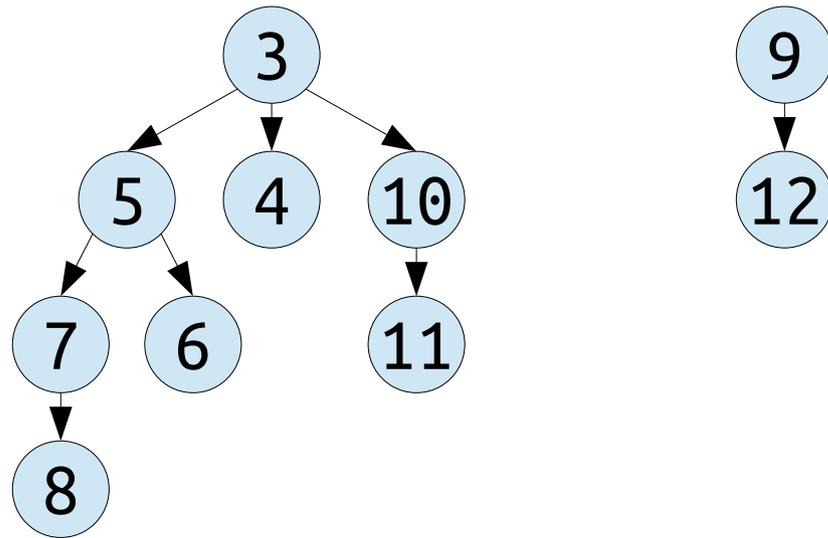


Lazy Binomial Heap

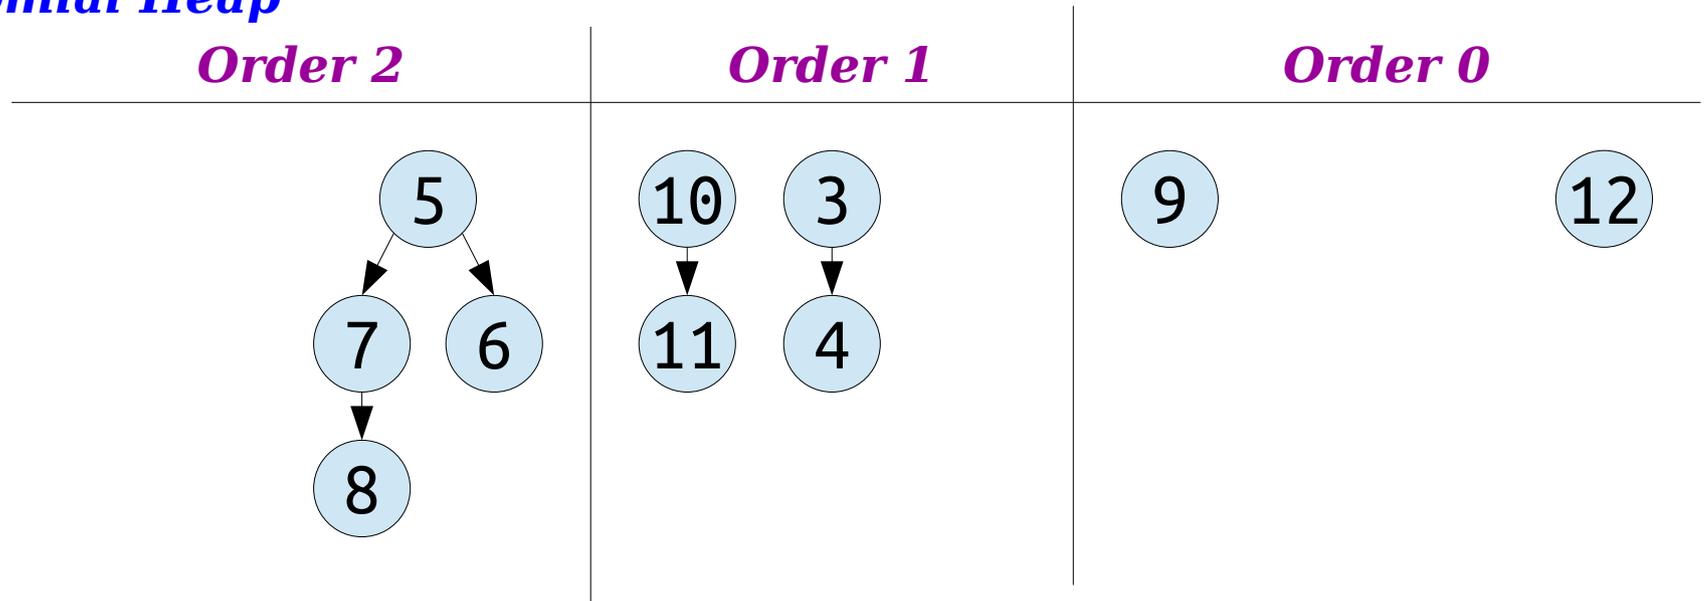


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

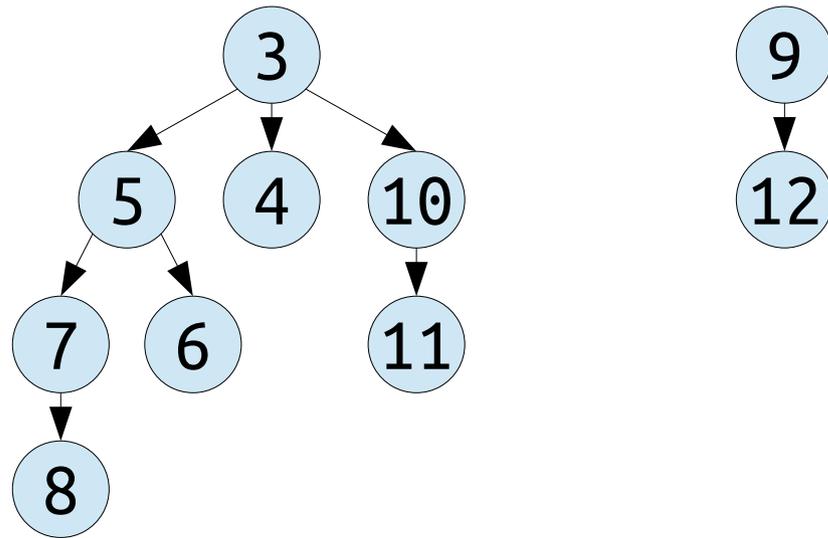


Lazy Binomial Heap

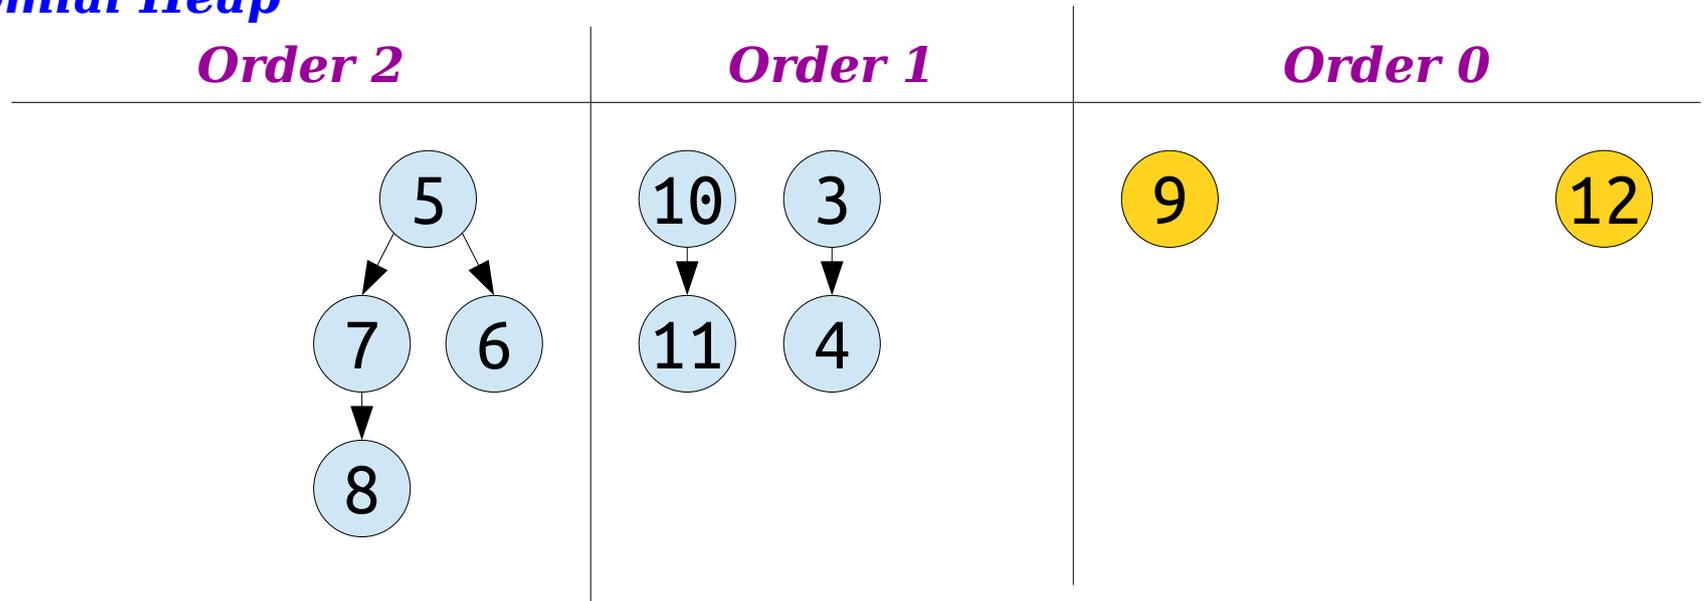


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

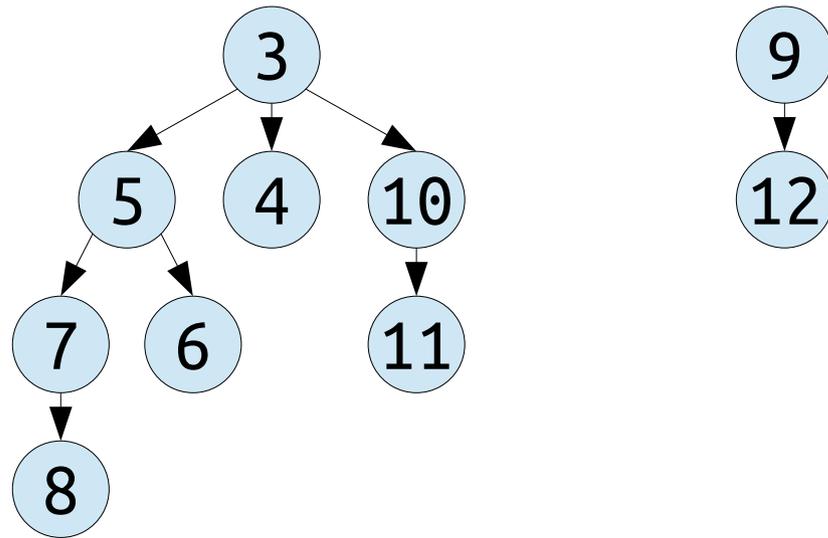


Lazy Binomial Heap

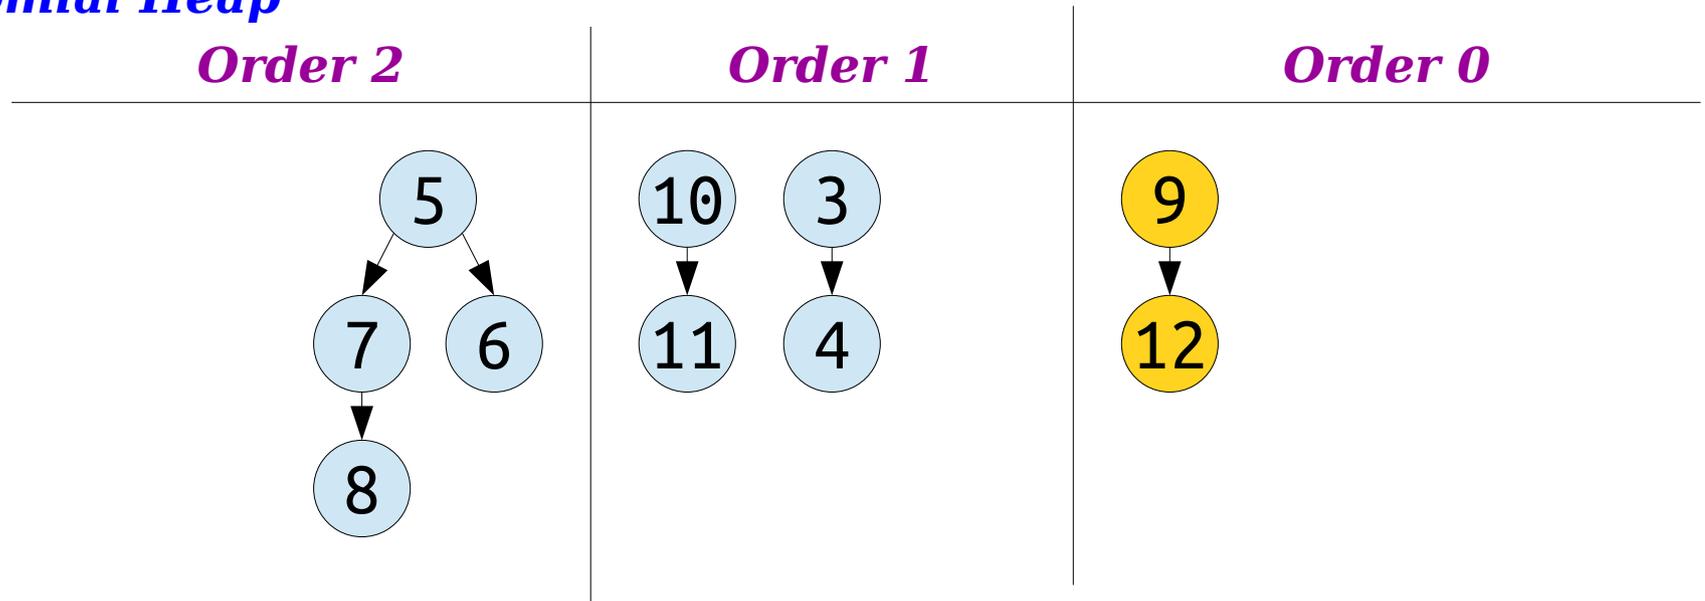


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

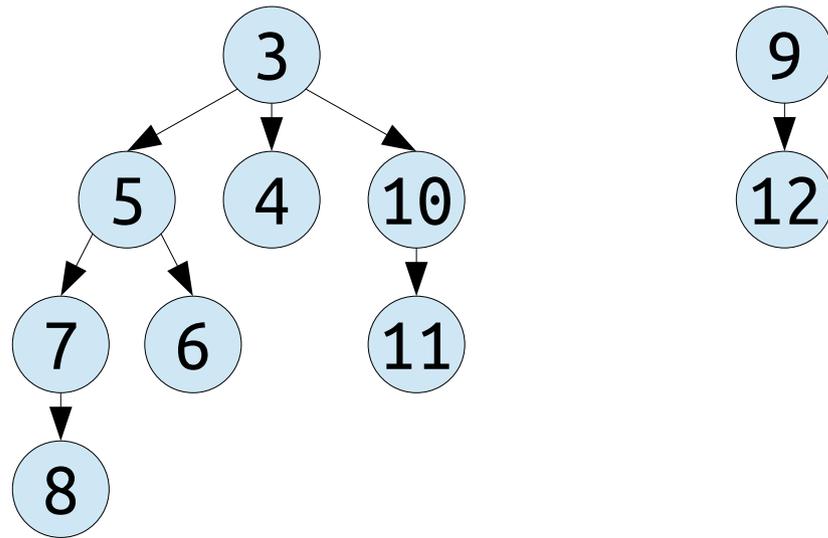


Lazy Binomial Heap

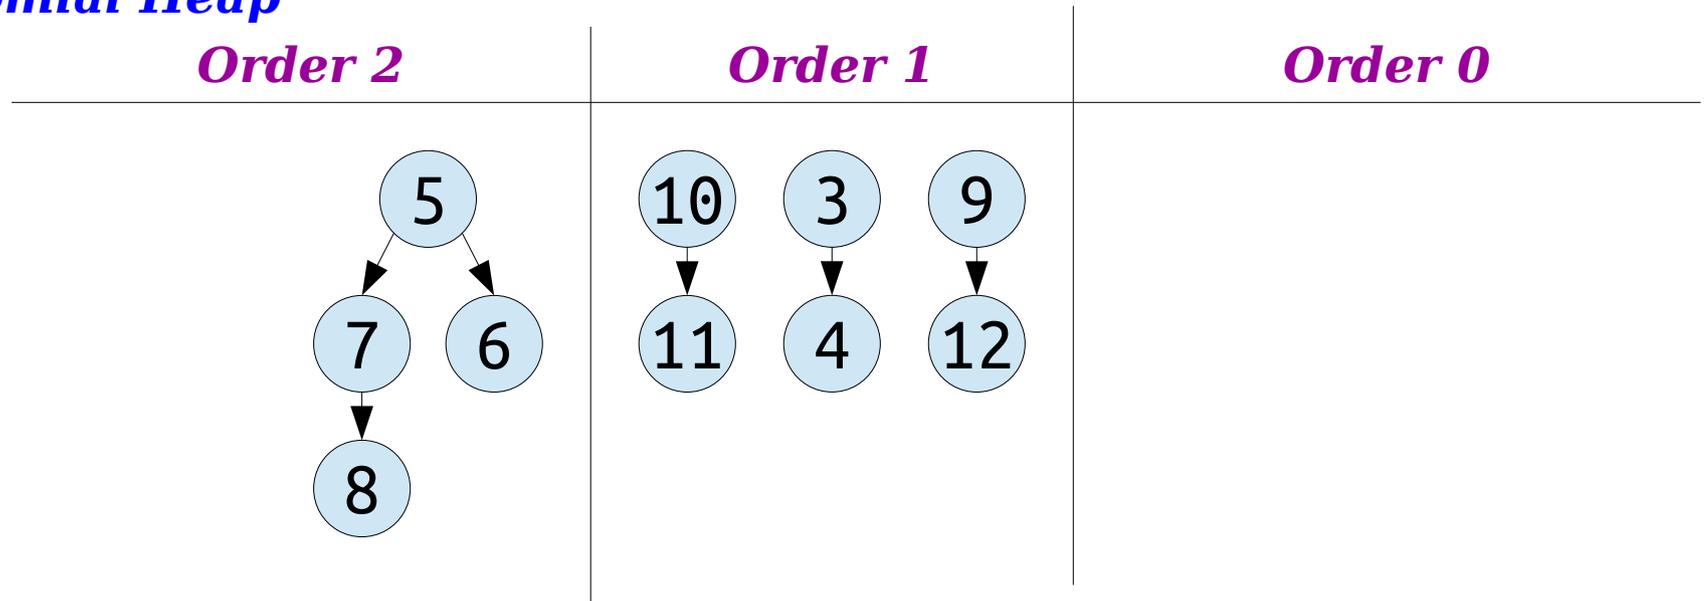


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

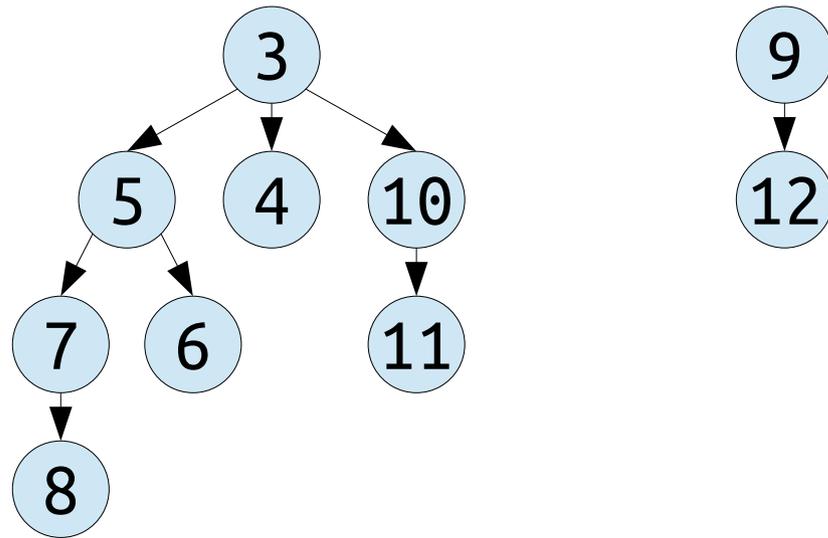


Lazy Binomial Heap

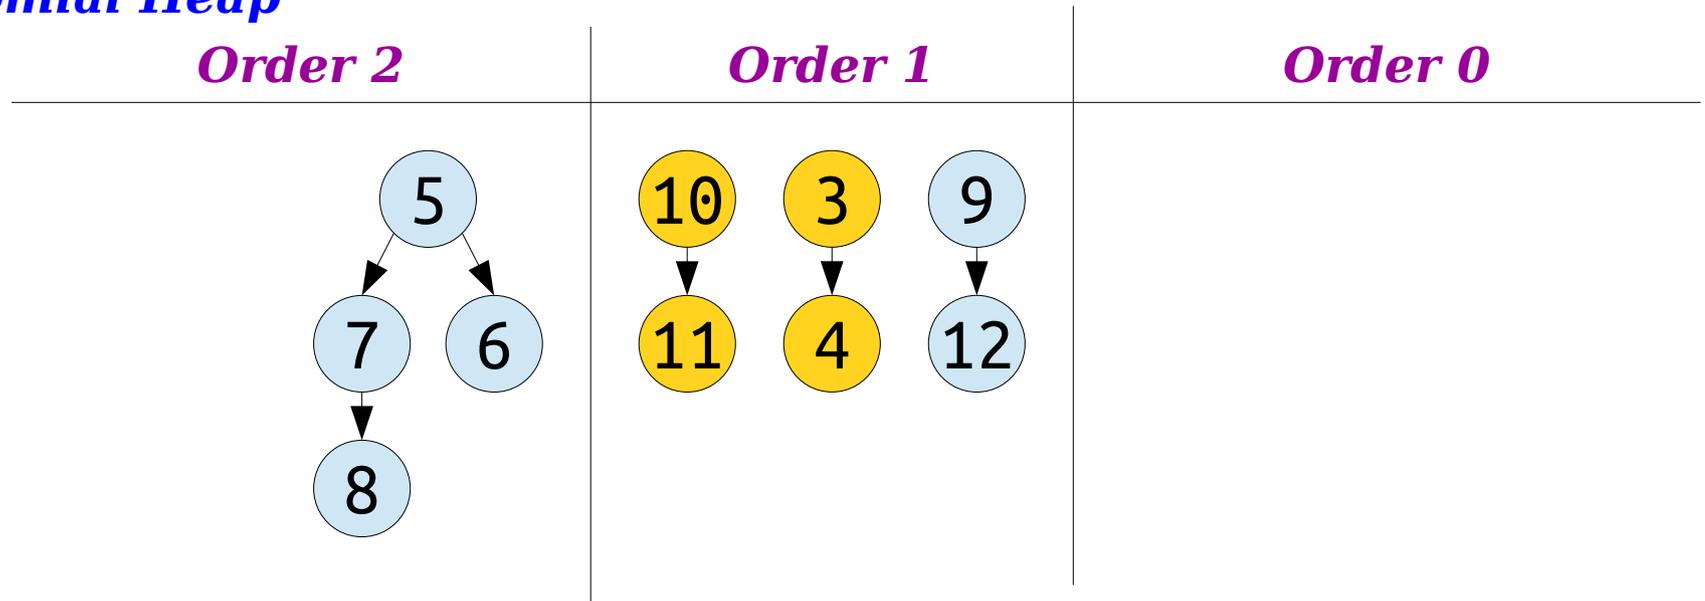


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

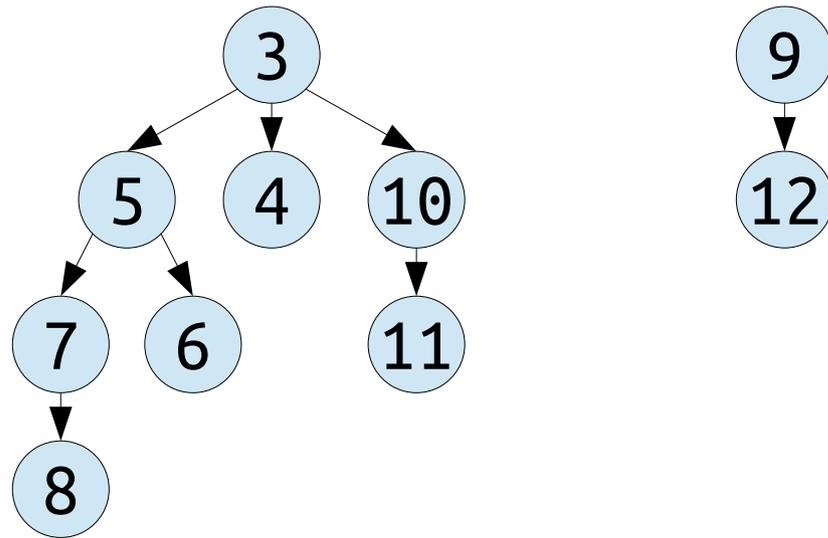


Lazy Binomial Heap

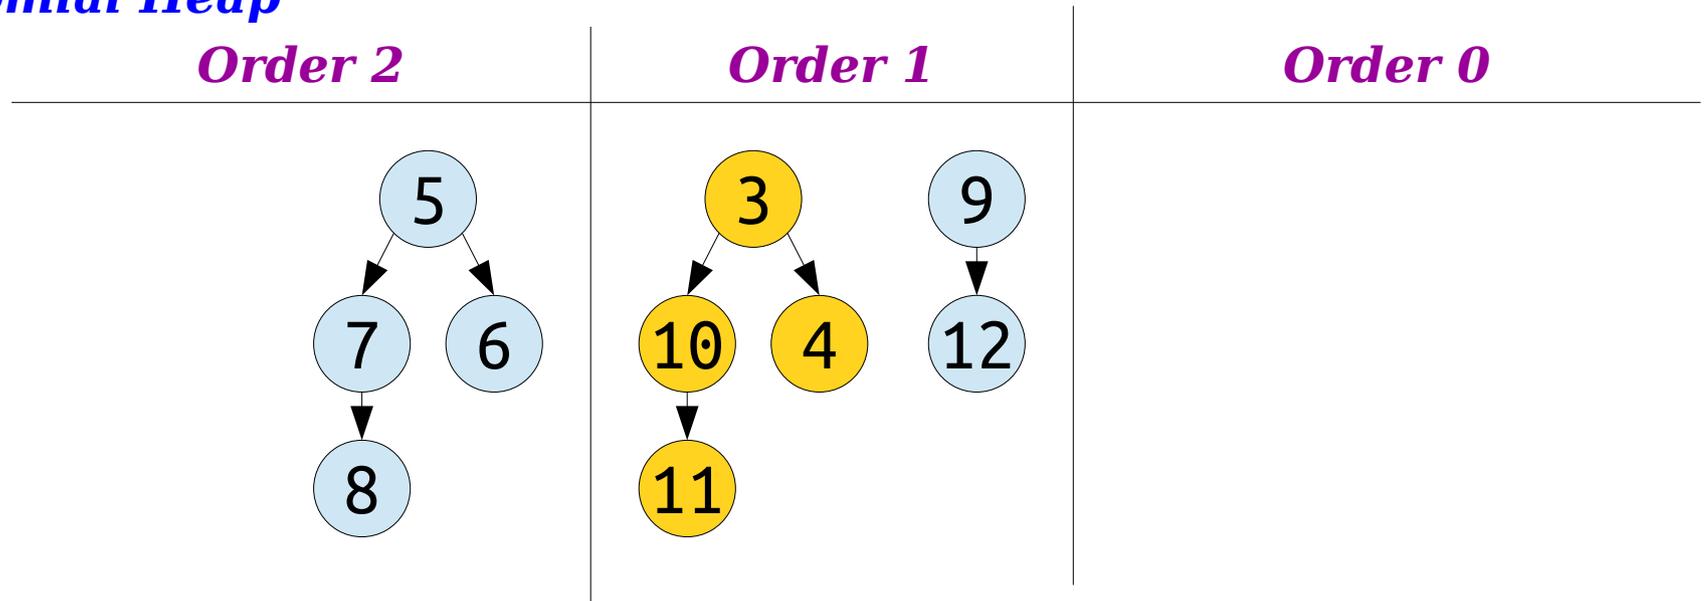


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

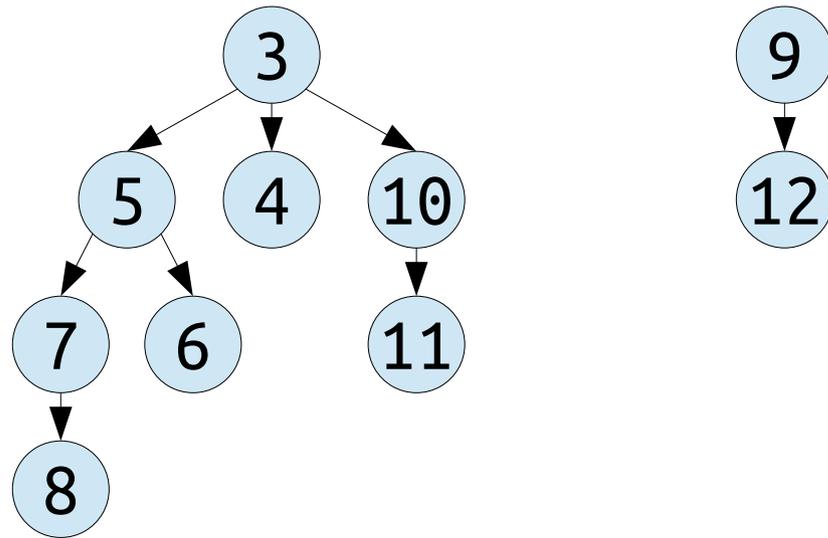


Lazy Binomial Heap

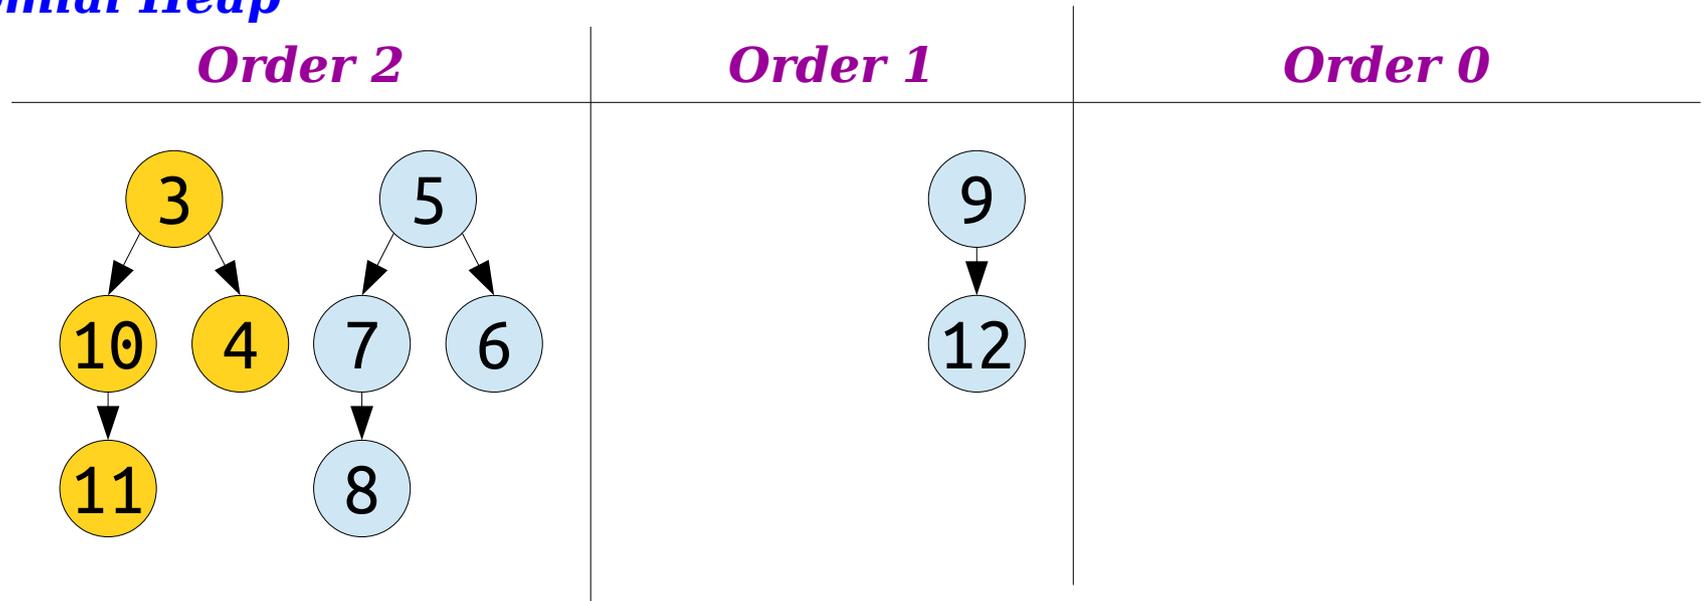


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

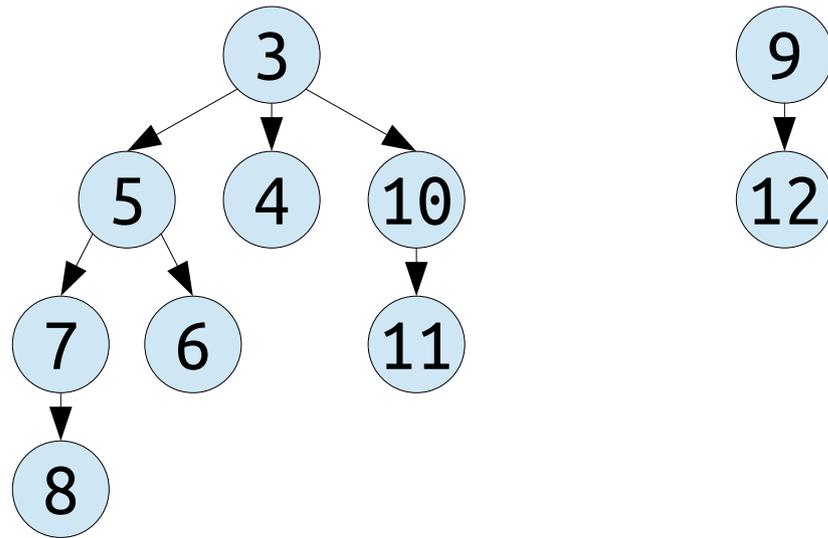


Lazy Binomial Heap

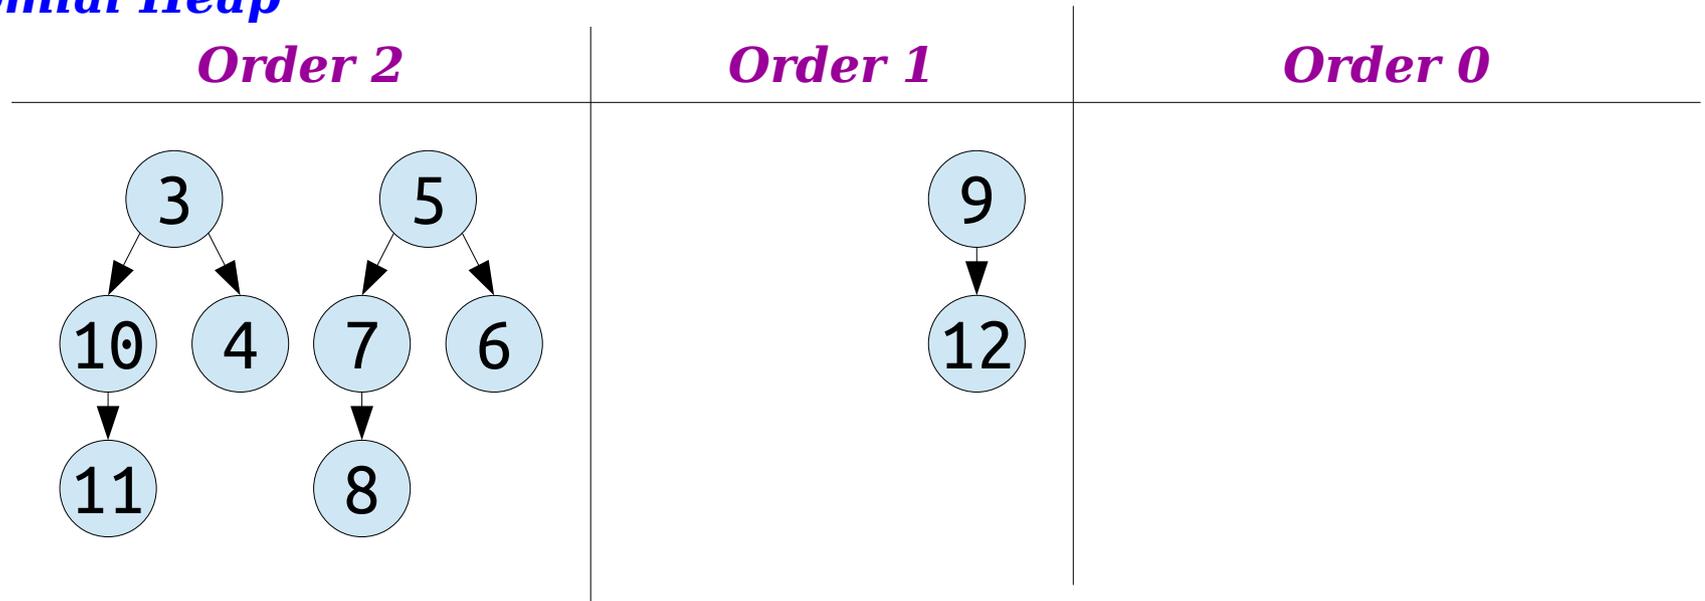


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

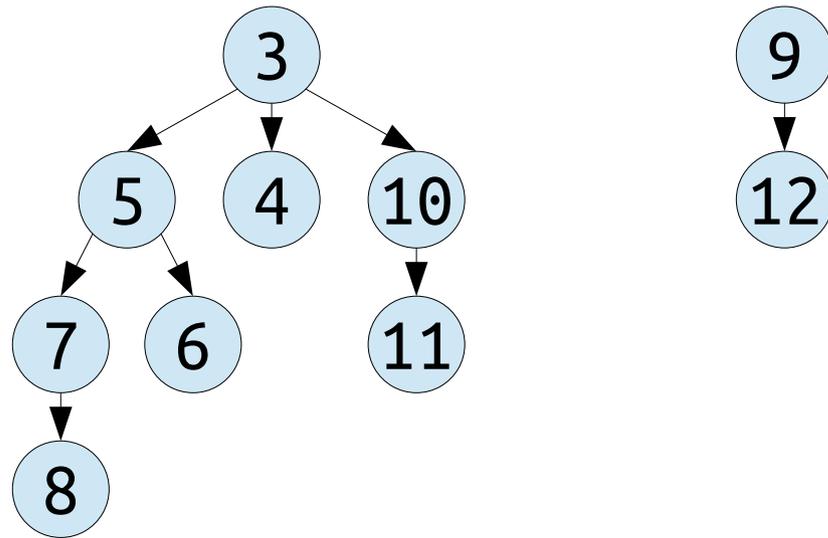


Lazy Binomial Heap

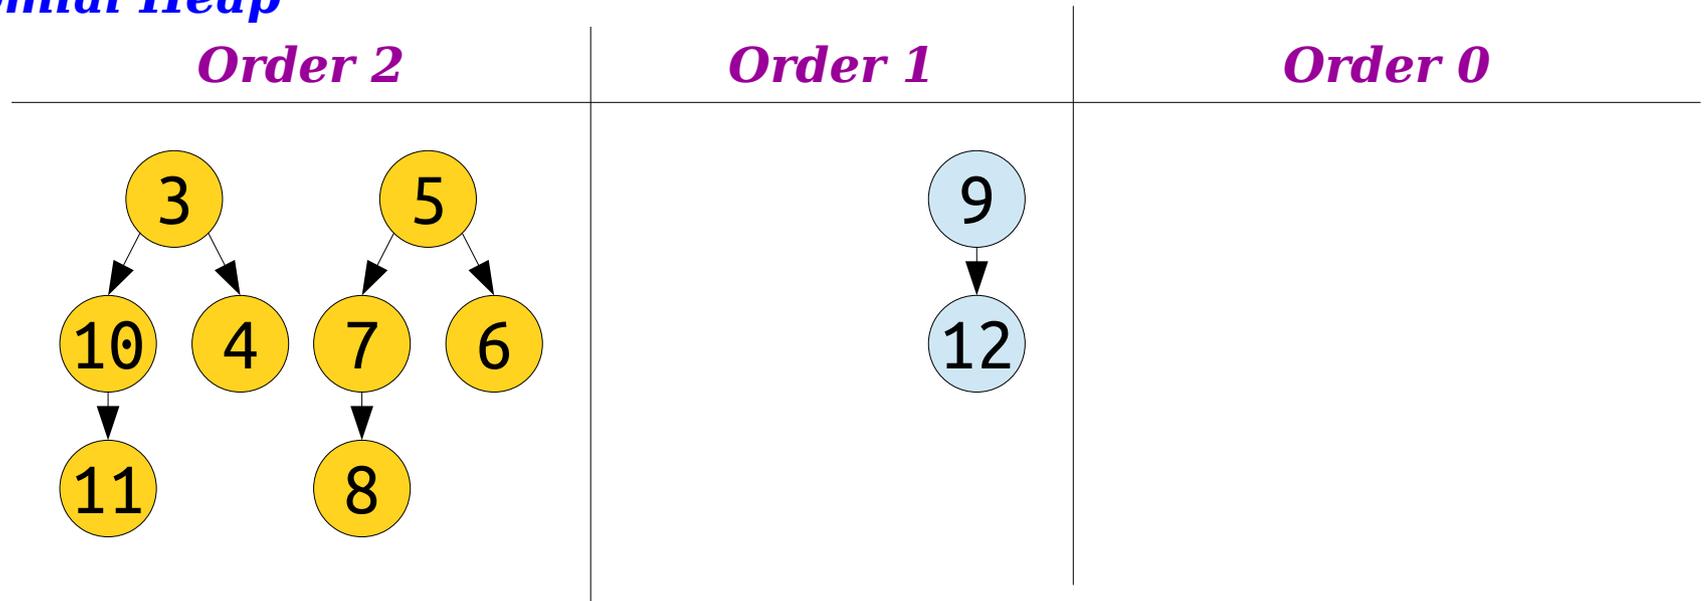


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

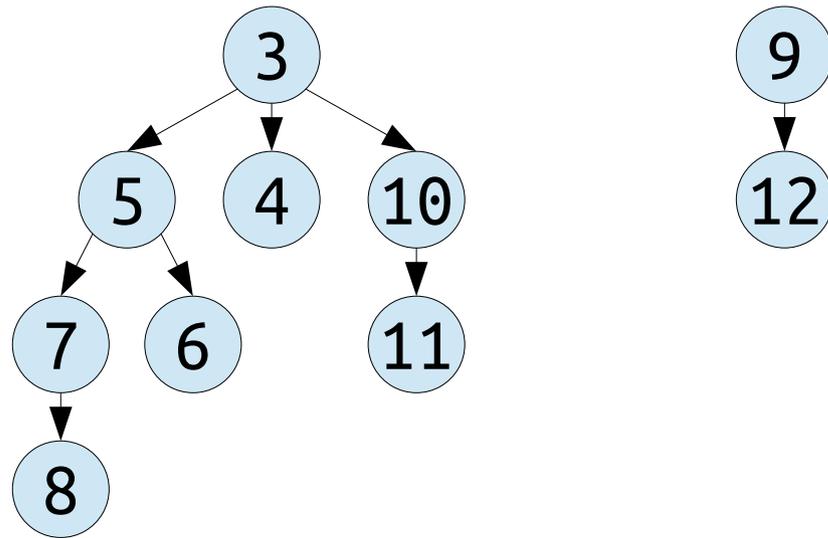


Lazy Binomial Heap

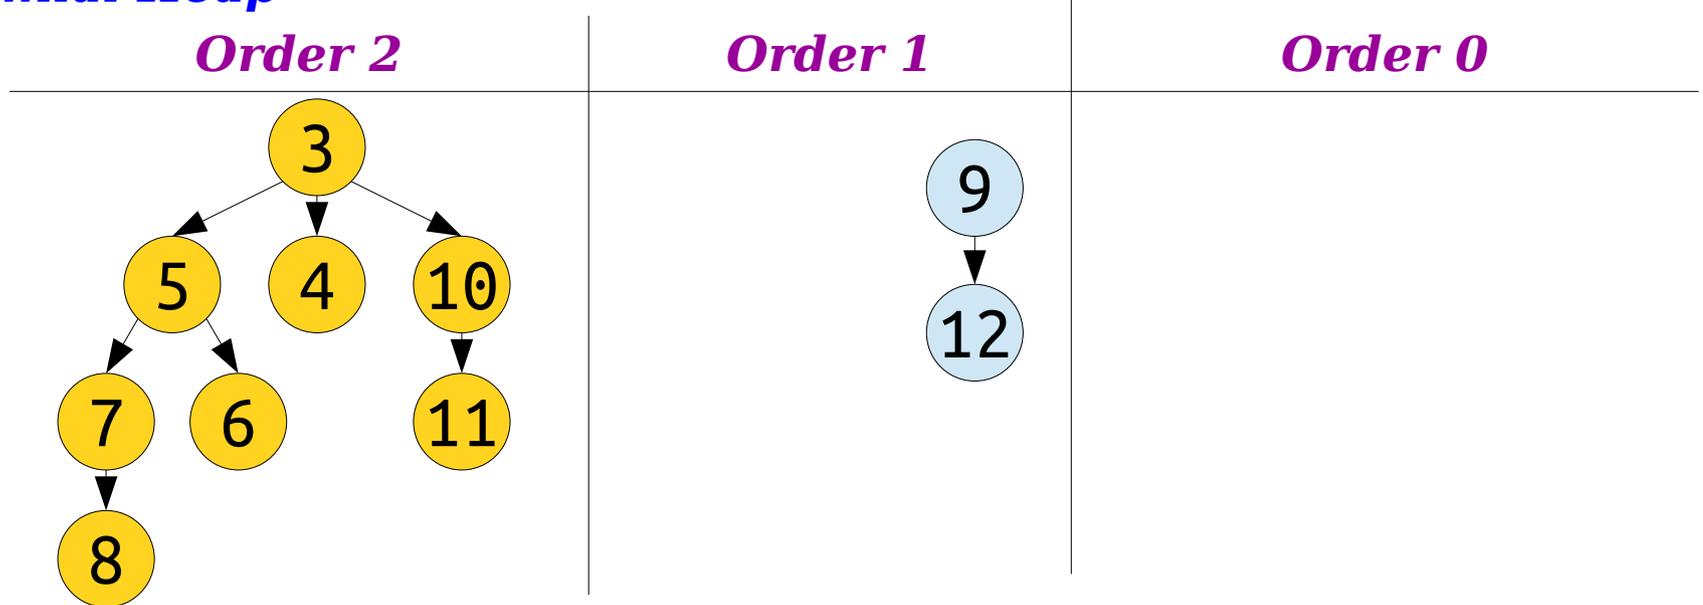


Draw what happens after we do a ***extract-min*** from both heaps.

Eager Binomial Heap

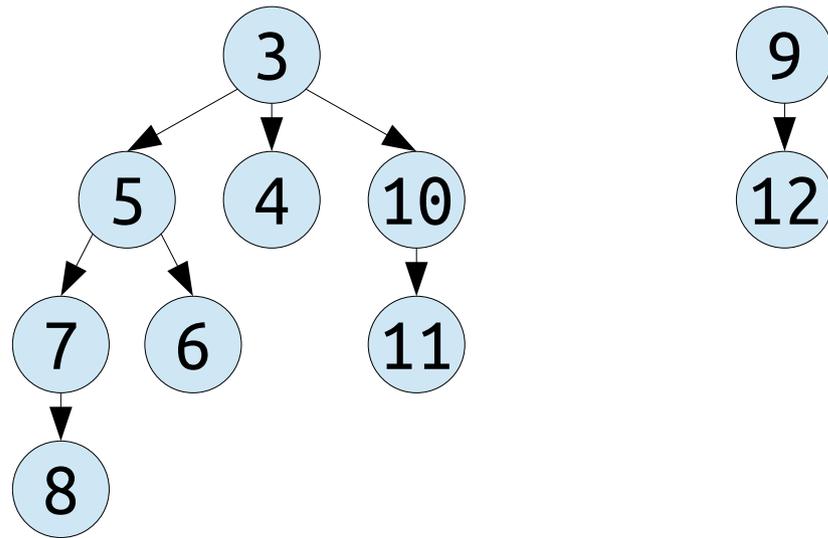

Lazy Binomial Heap

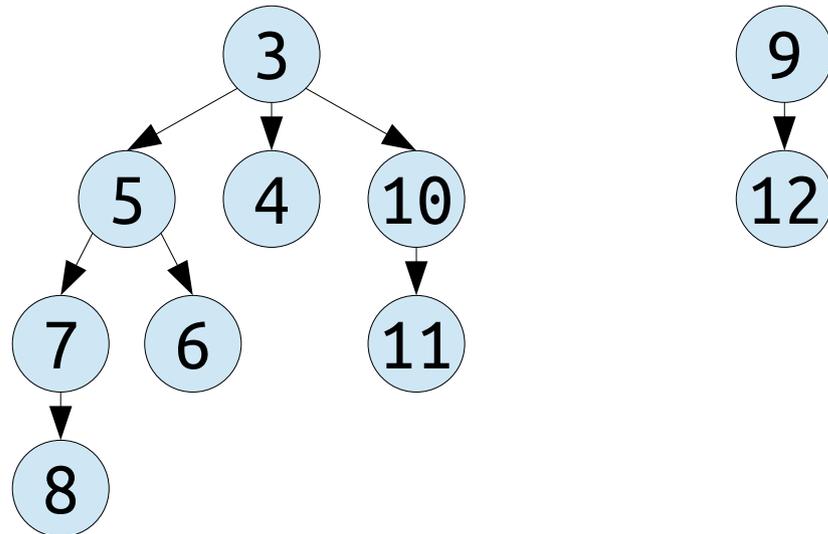

Draw what happens after we do a ***extract-min*** from both heaps.

Operation Costs

- Each individual ***extract-min*** in a lazy binomial heap may take a while, but amortizes out to $O(\log n)$.
- ***Intuition:*** Each ***extract-min*** does cleanup for the earlier ***enqueue*** operations, leaving the heap with few trees.

Eager Binomial Heap:

- ***enqueue***: $O(\log n)$
- ***meld***: $O(\log n)$
- ***find-min***: $O(\log n)$
- ***extract-min***: $O(\log n)$

Lazy Binomial Heap:

- ***enqueue***: $O(1)$
- ***meld***: $O(1)$
- ***find-min***: $O(1)$
- ***extract-min***: $O(\log n)^*$

**amortized*

New Stuff!

The Need for *decrease-key*

The *decrease-key* Operation


- Some priority queues support the operation *decrease-key*(v, k), which works as follows:

Given a pointer to an element v , lower its key (priority) to k . It is assumed that k is less than the current priority of v .

- This operation is crucial in efficient implementations of Dijkstra's algorithm and Prim's MST algorithm.


Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

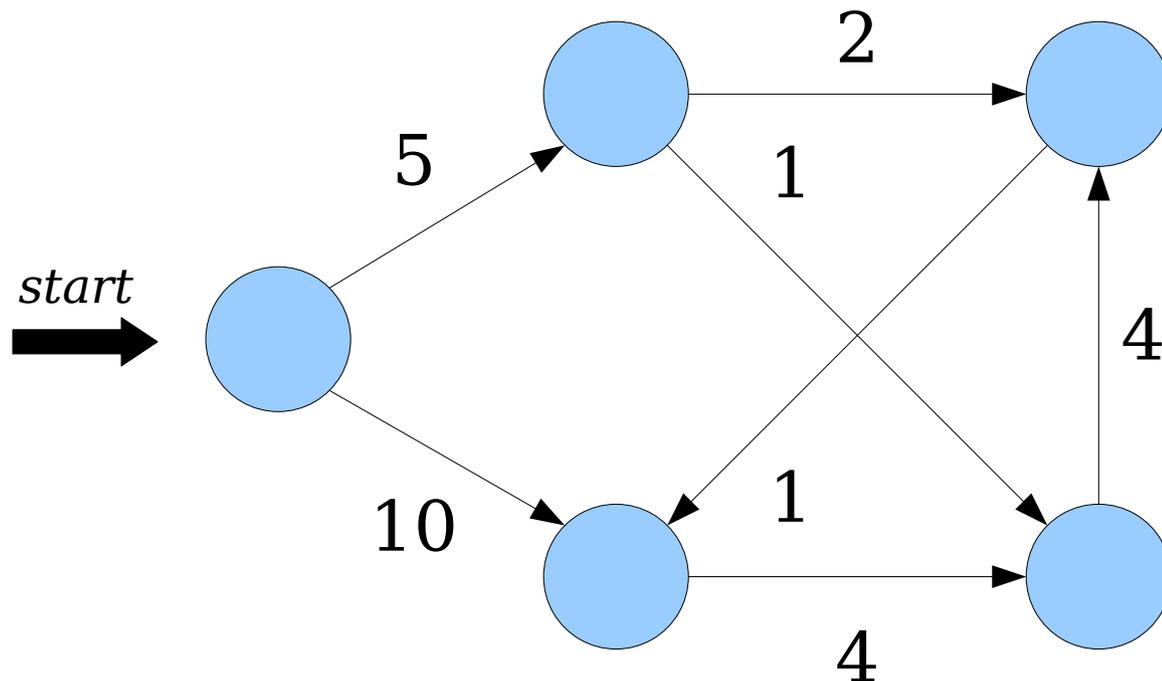


Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

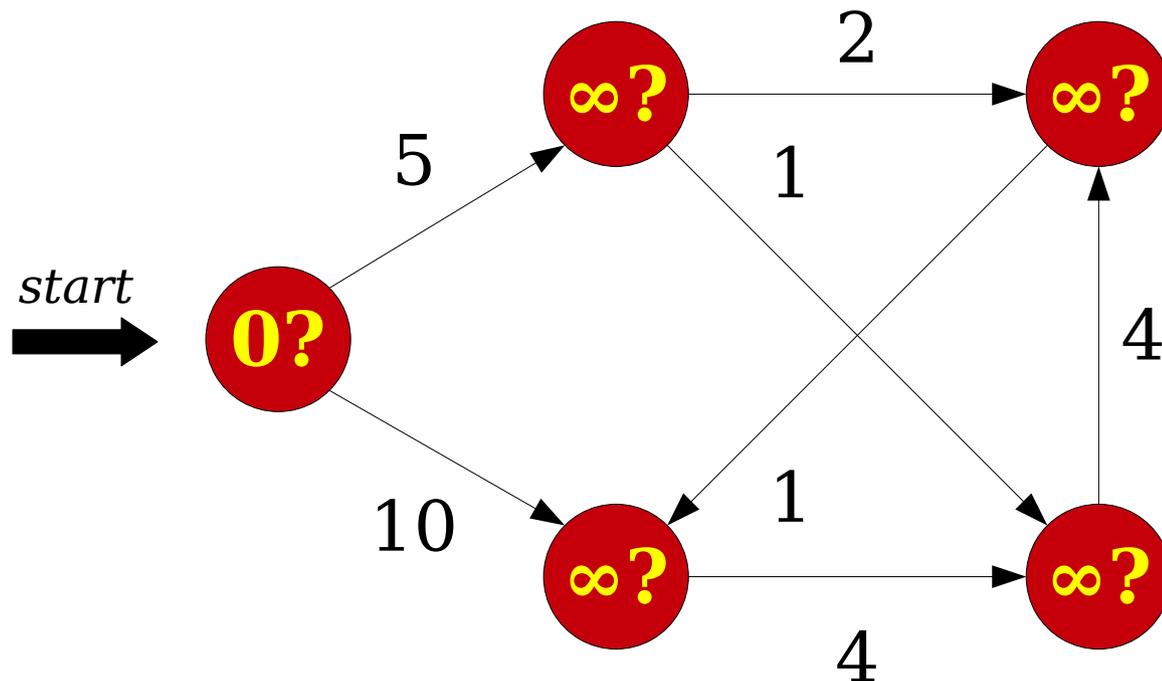


Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

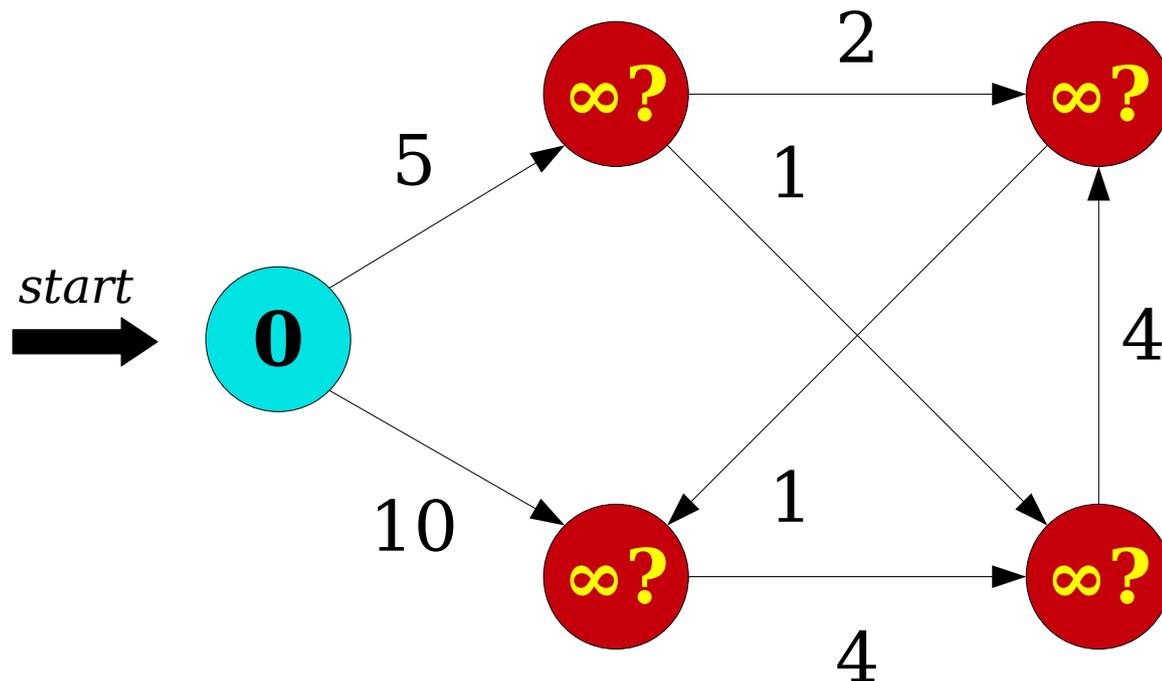


Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

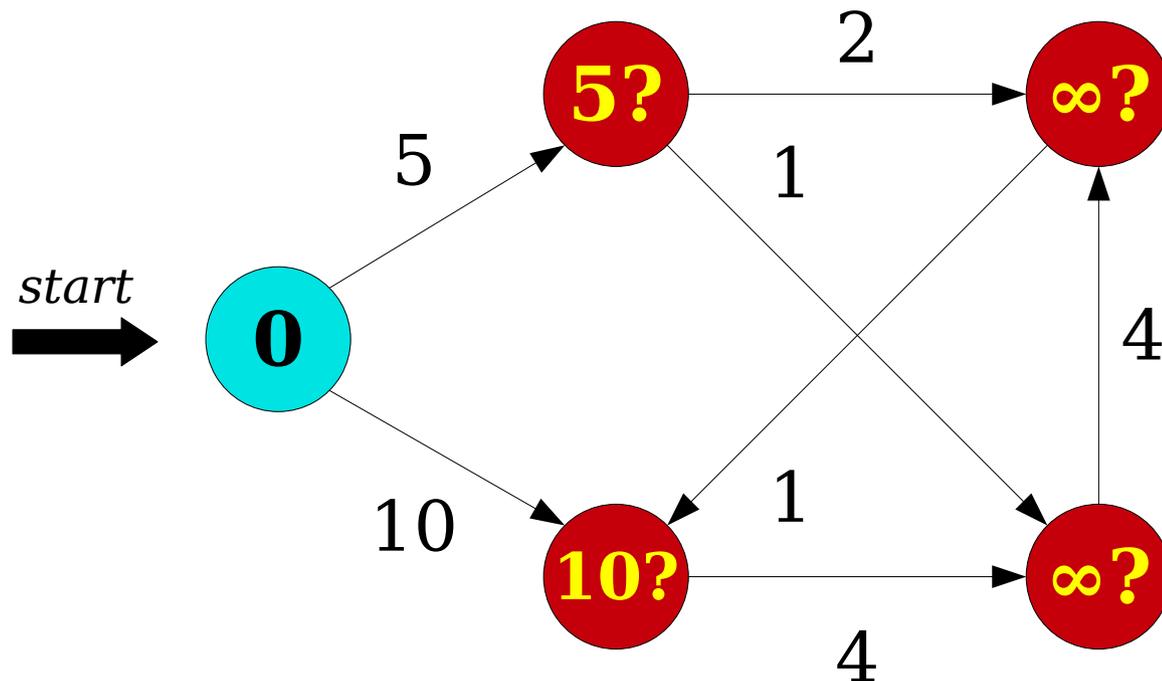


Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

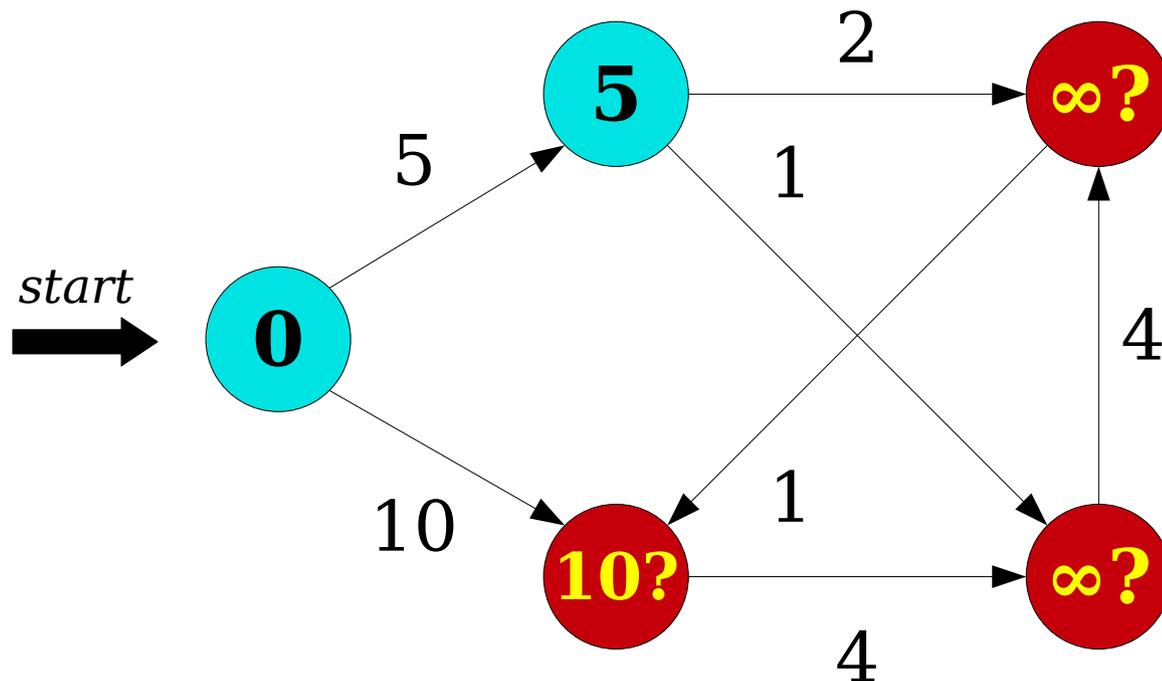


Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

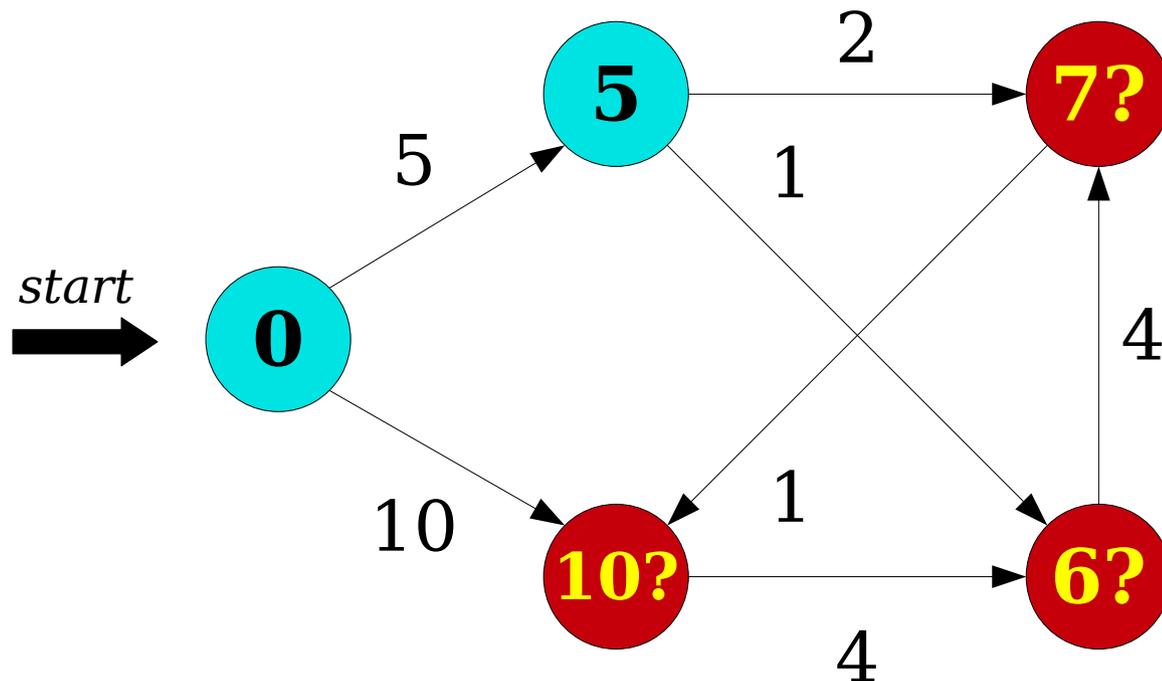


Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

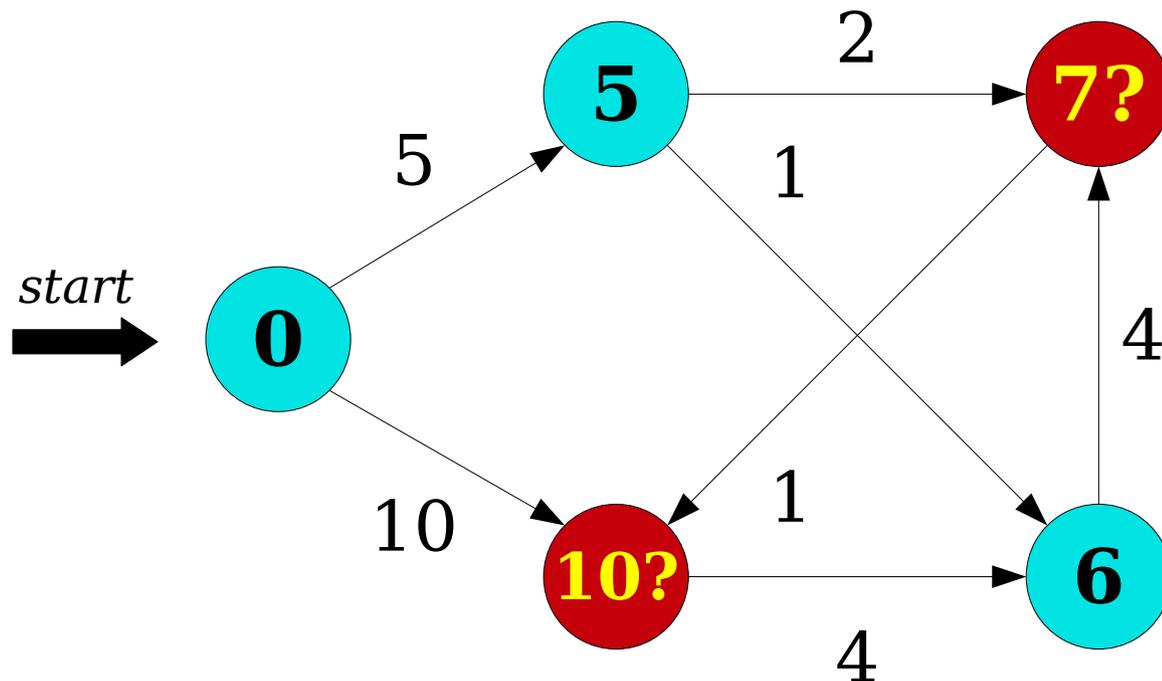


Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

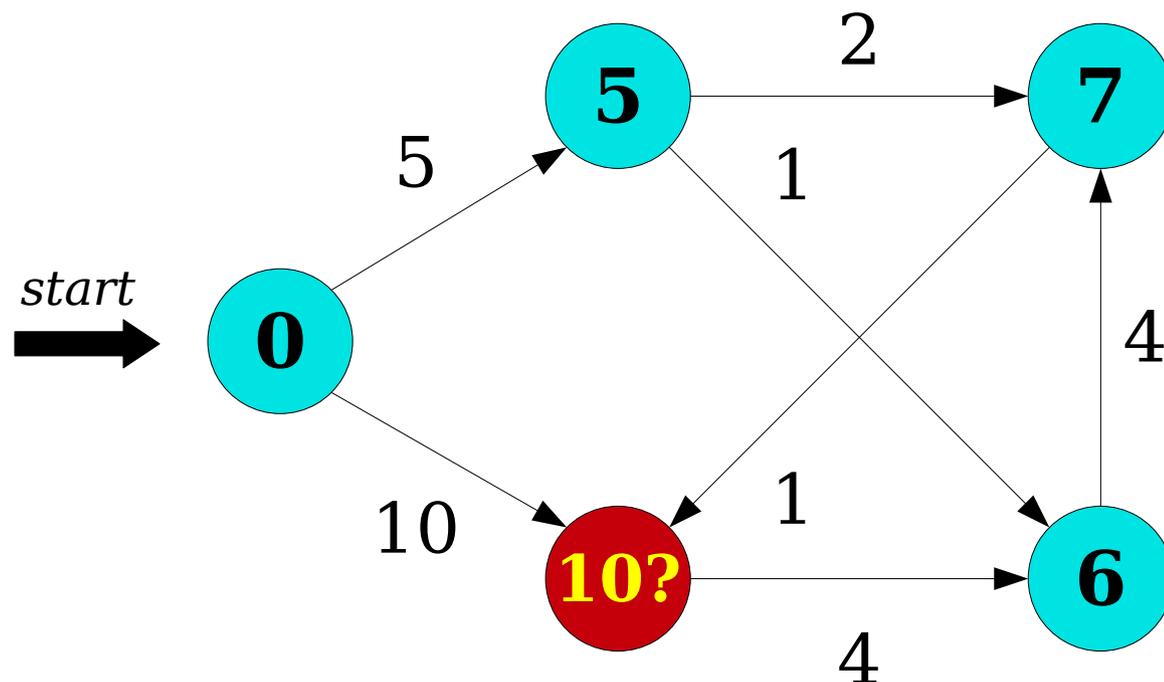


Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

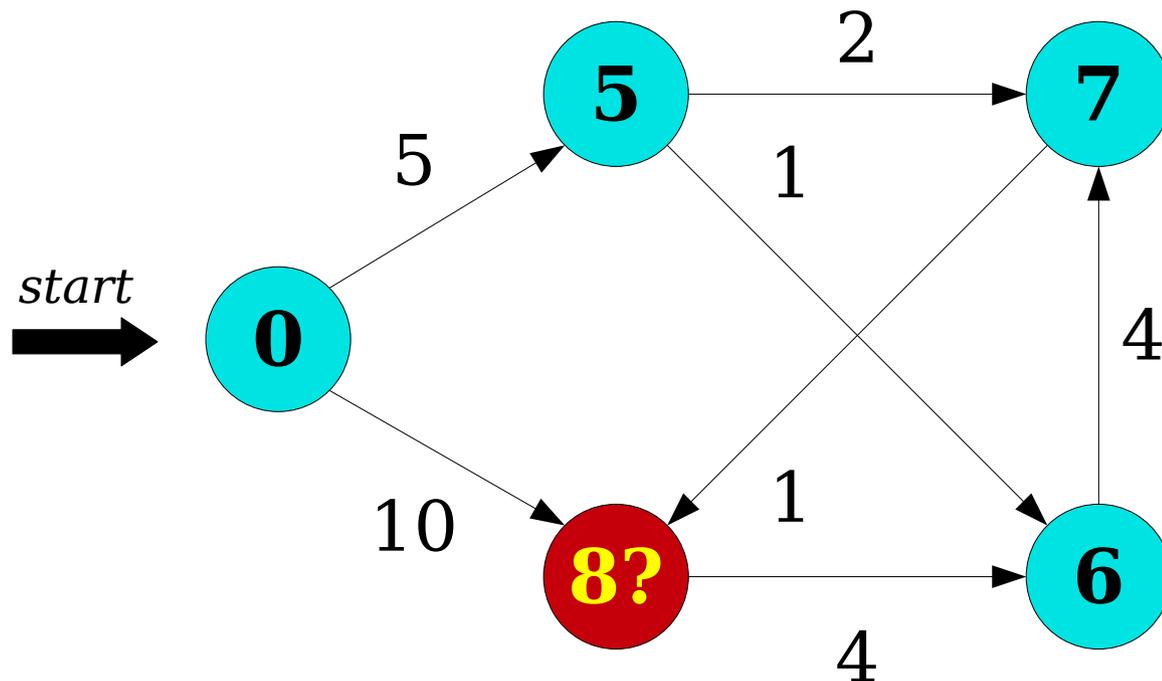

Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

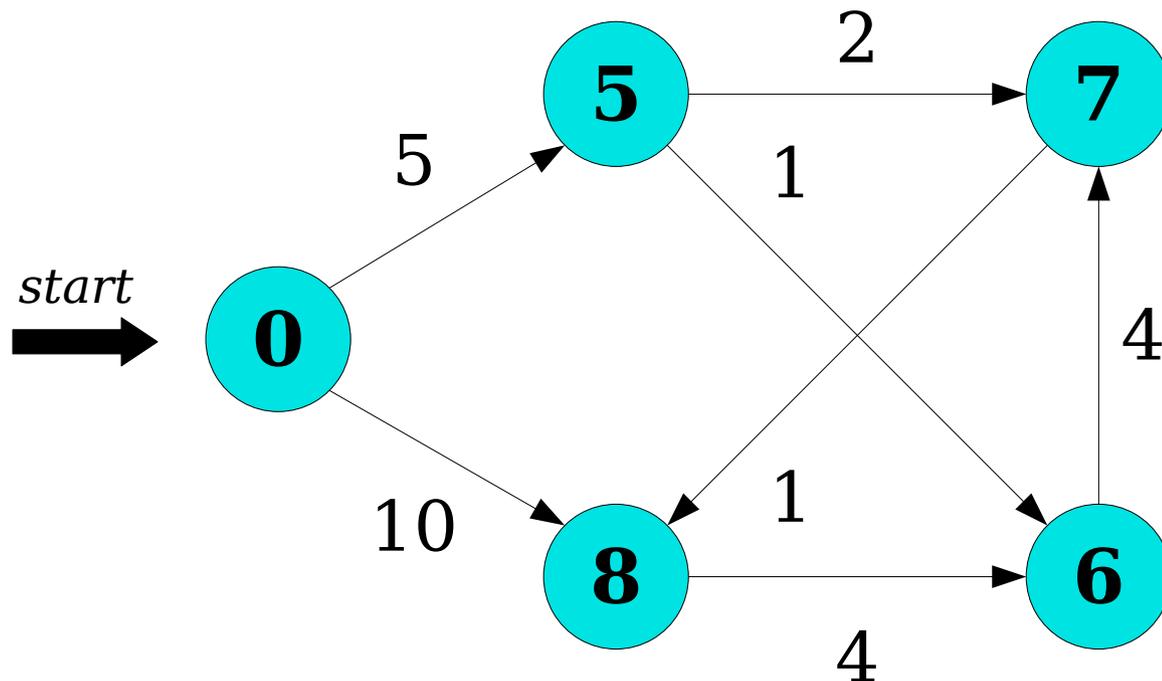

Dijkstra and *decrease-key*

- Dijkstra's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.
- Dijkstra's algorithm runtime is


$$O(n T_{\text{enq}} + n T_{\text{ext}} + m T_{\text{dec}})$$

Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueuees*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

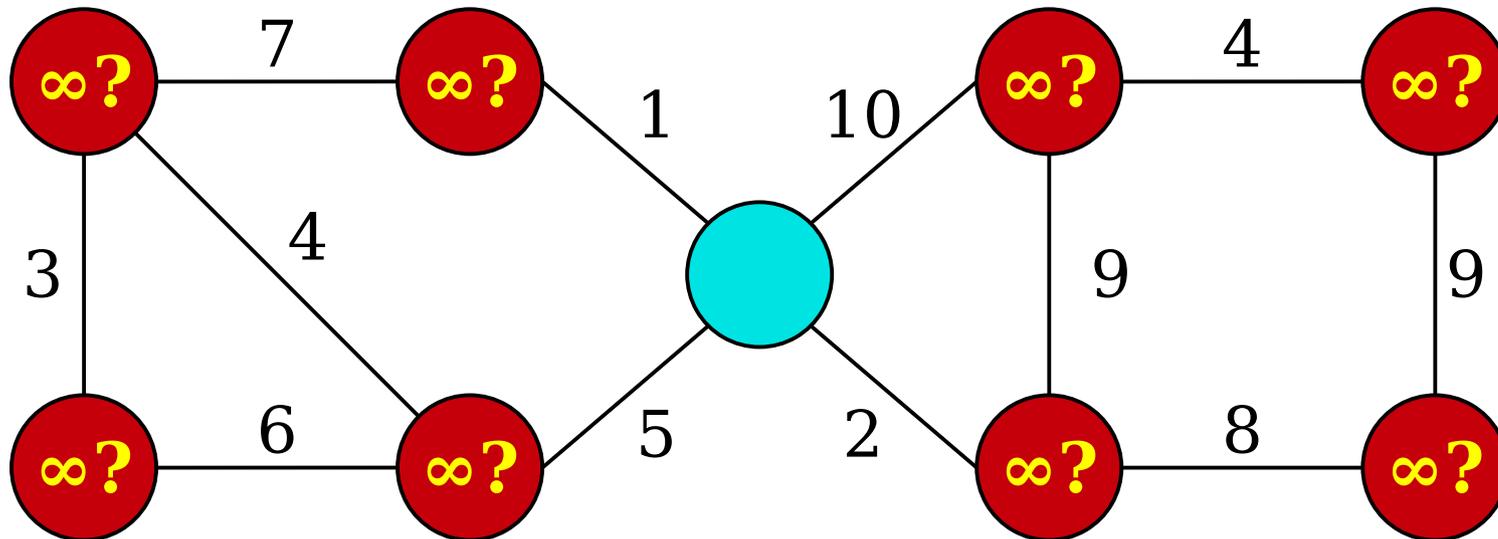


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

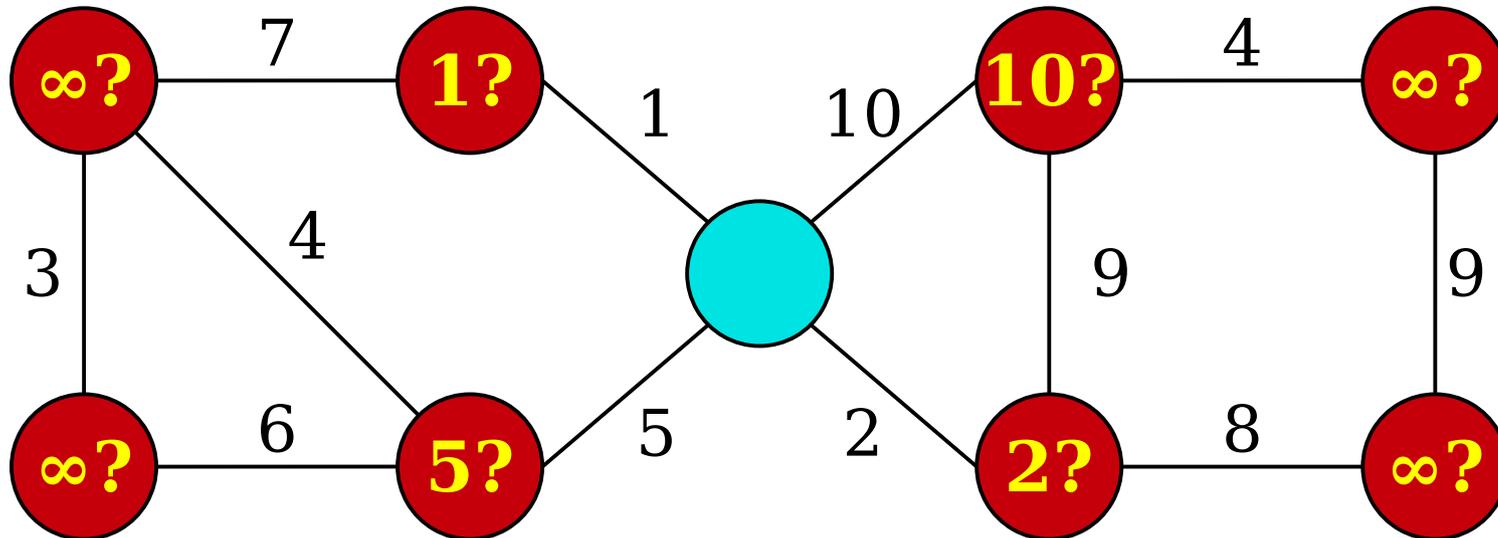


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

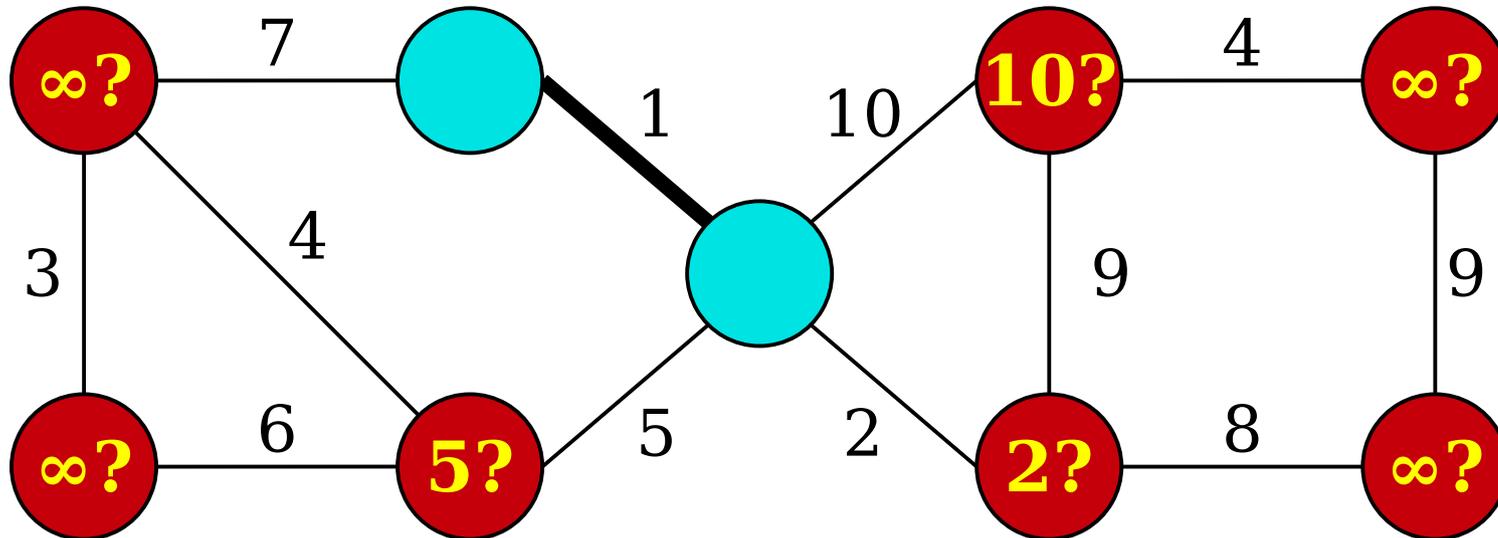


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

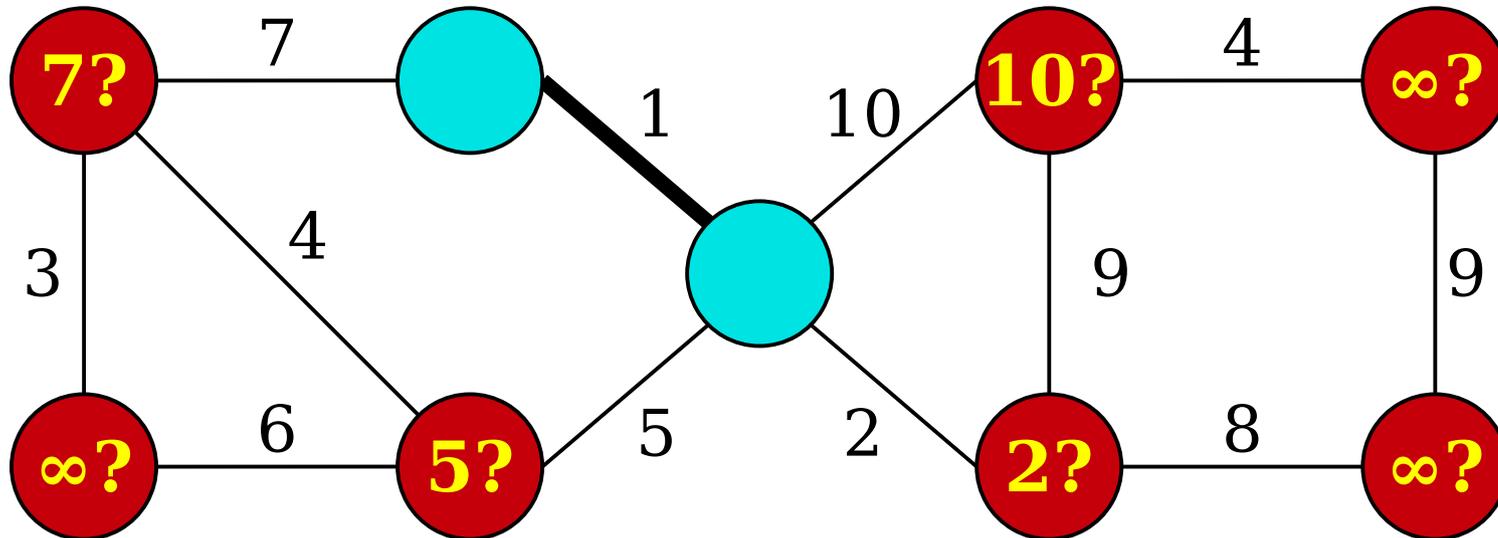


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

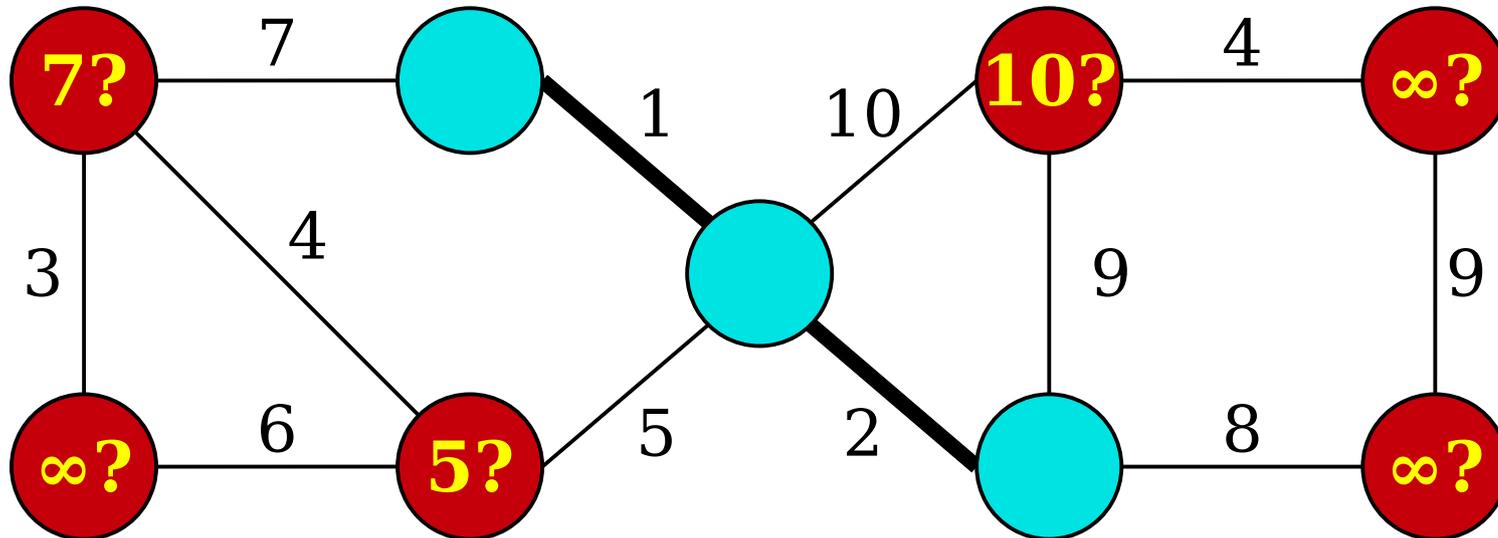


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

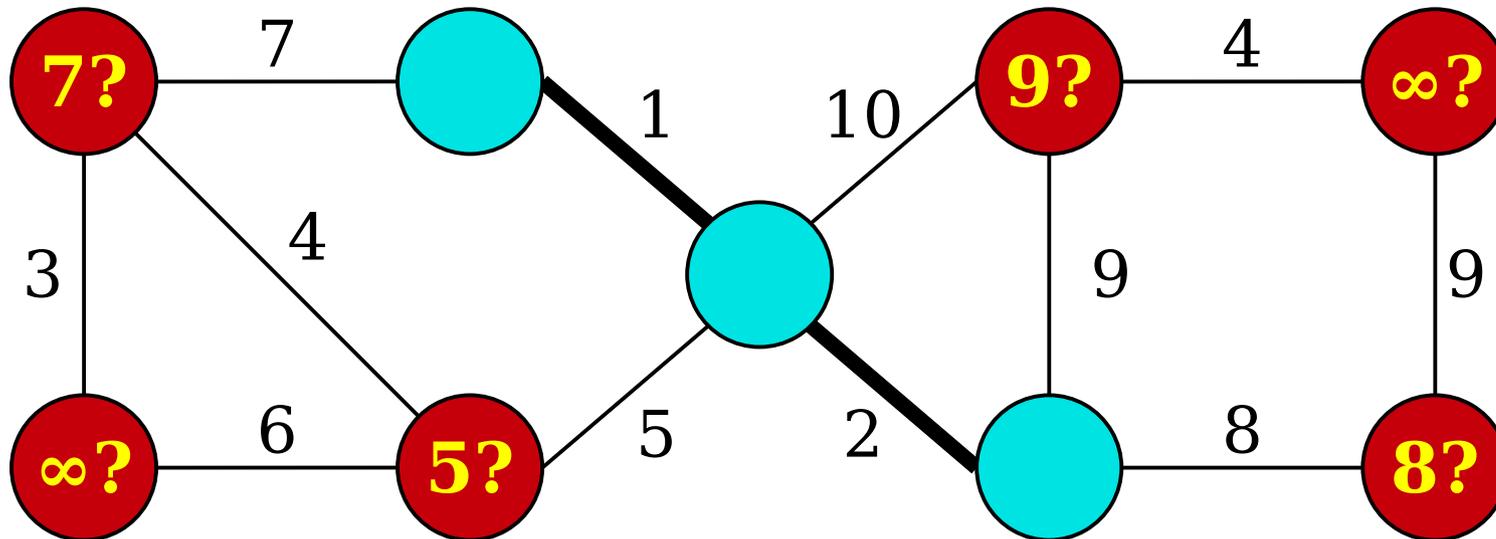


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

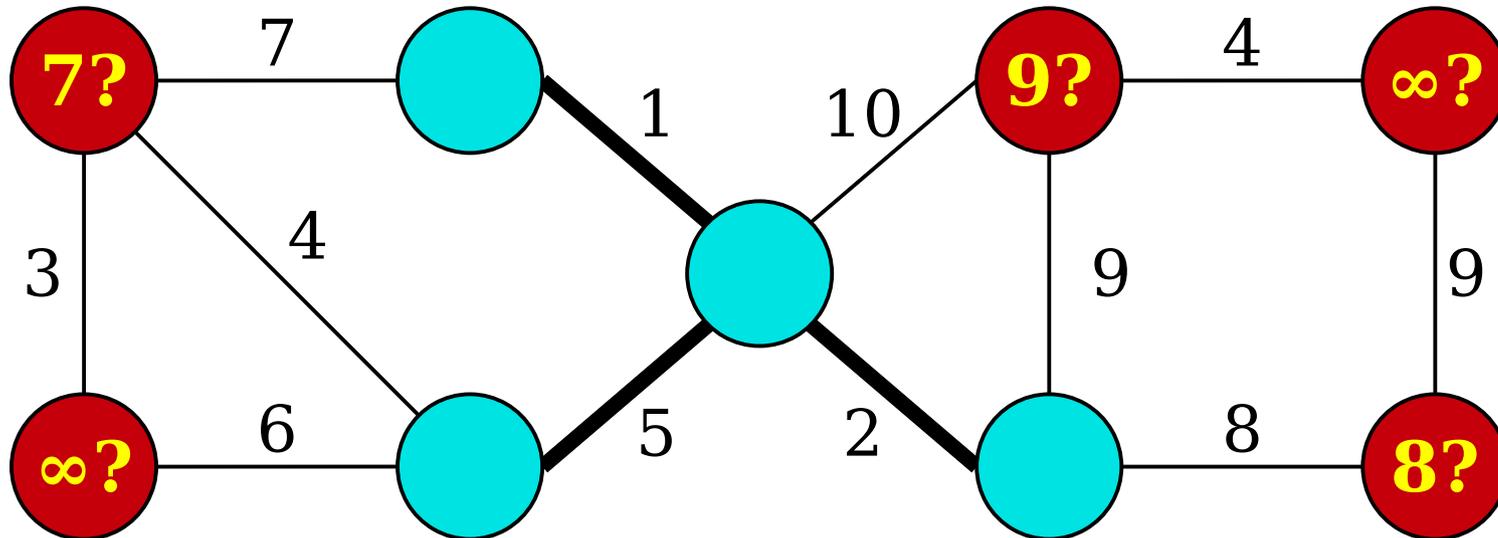


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

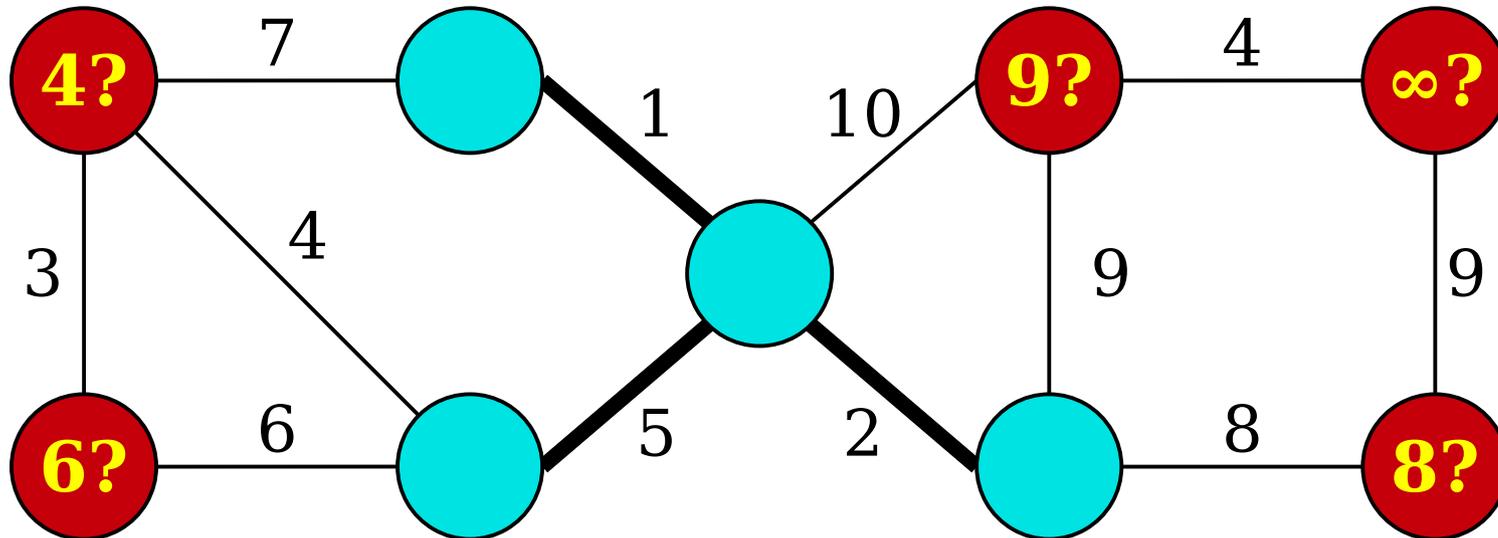


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

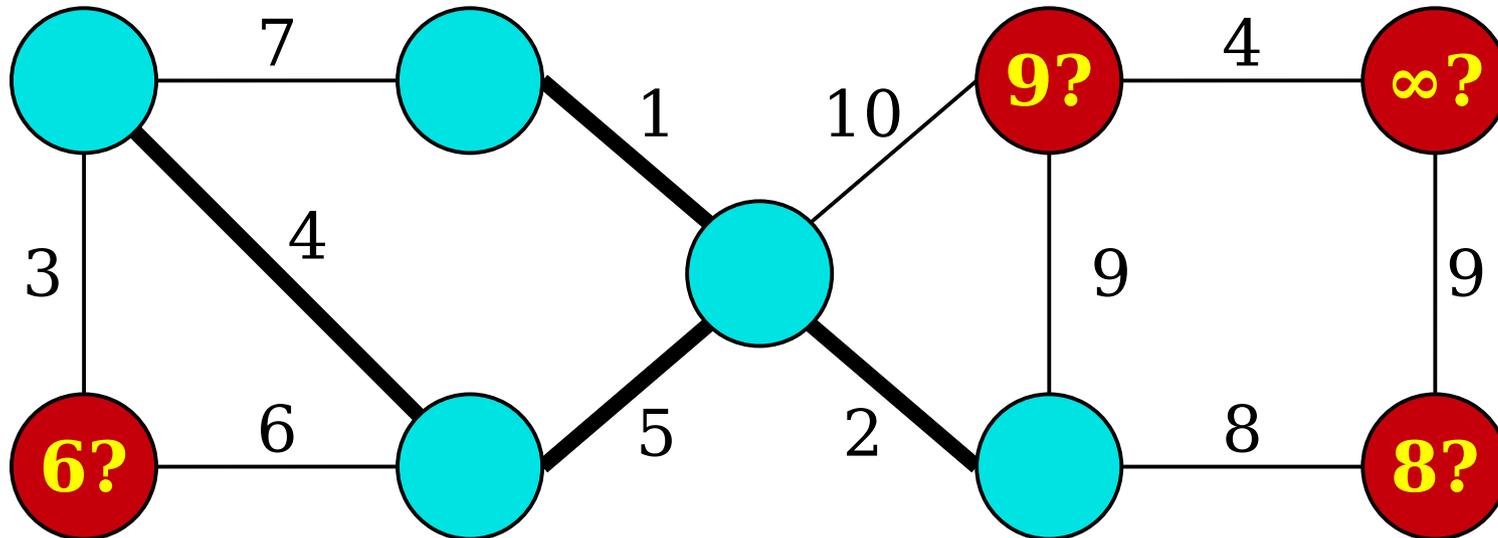


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

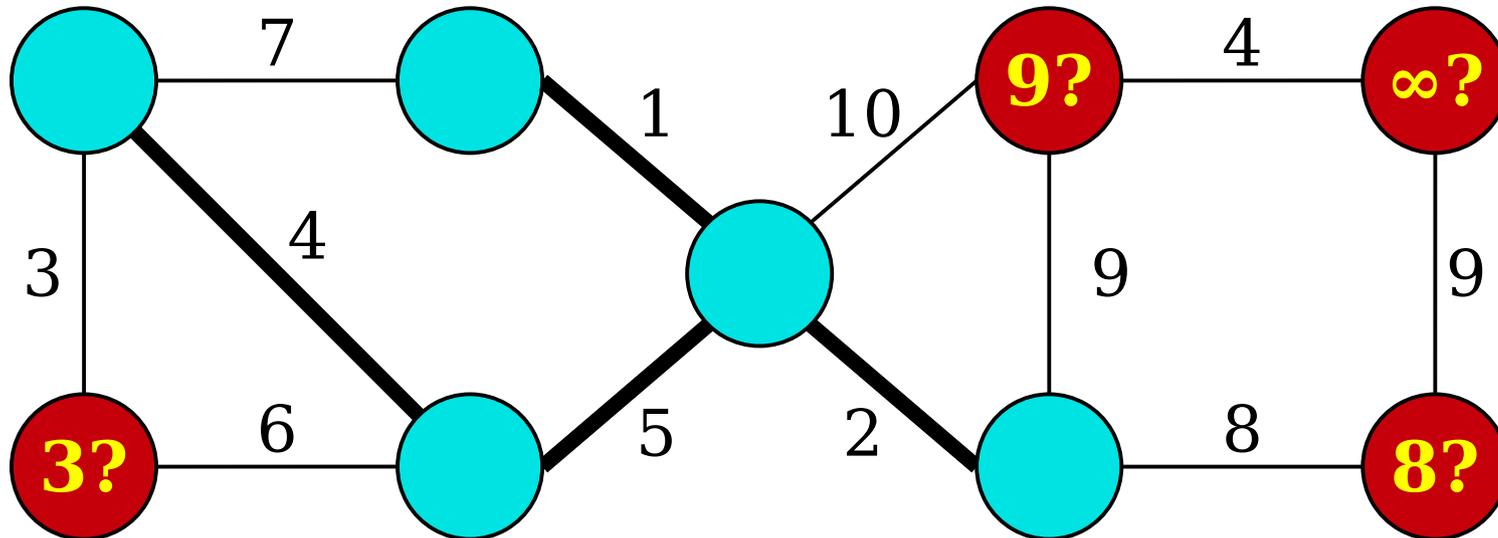


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

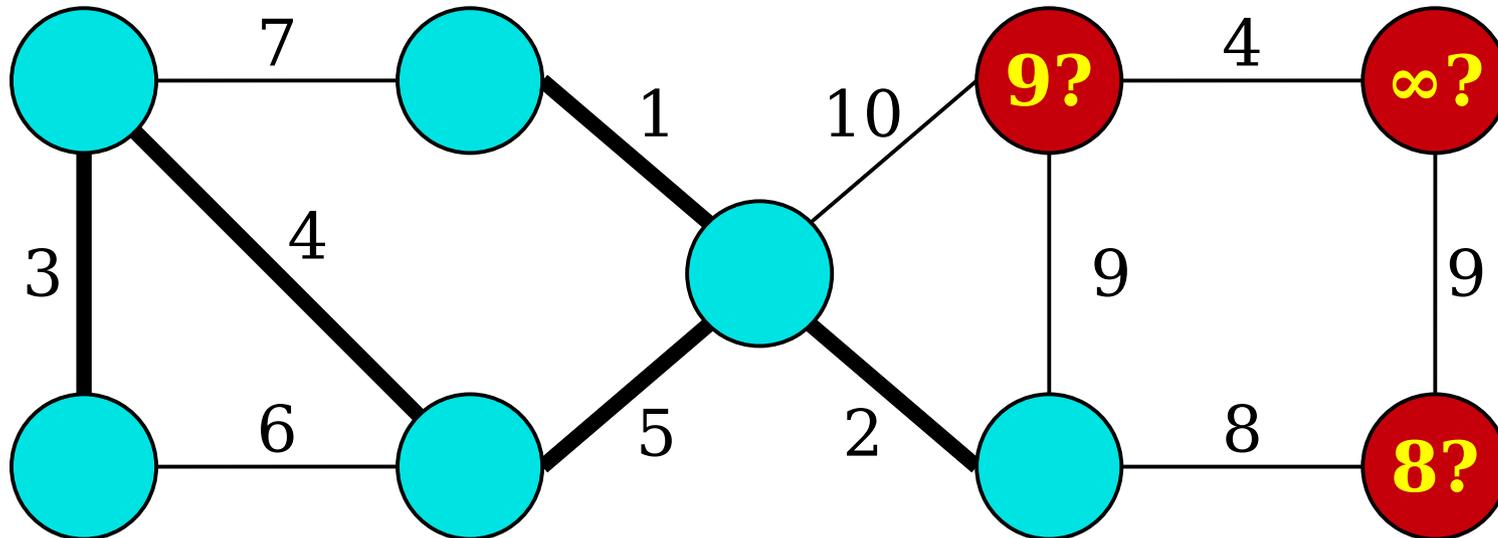


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

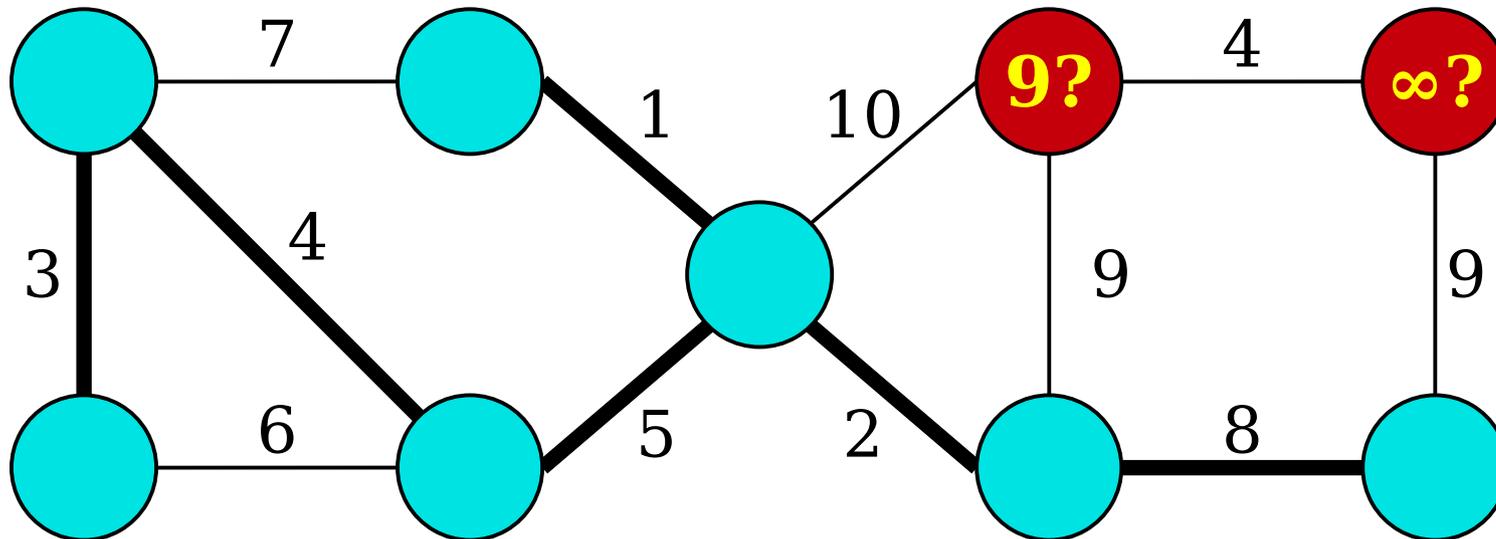


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

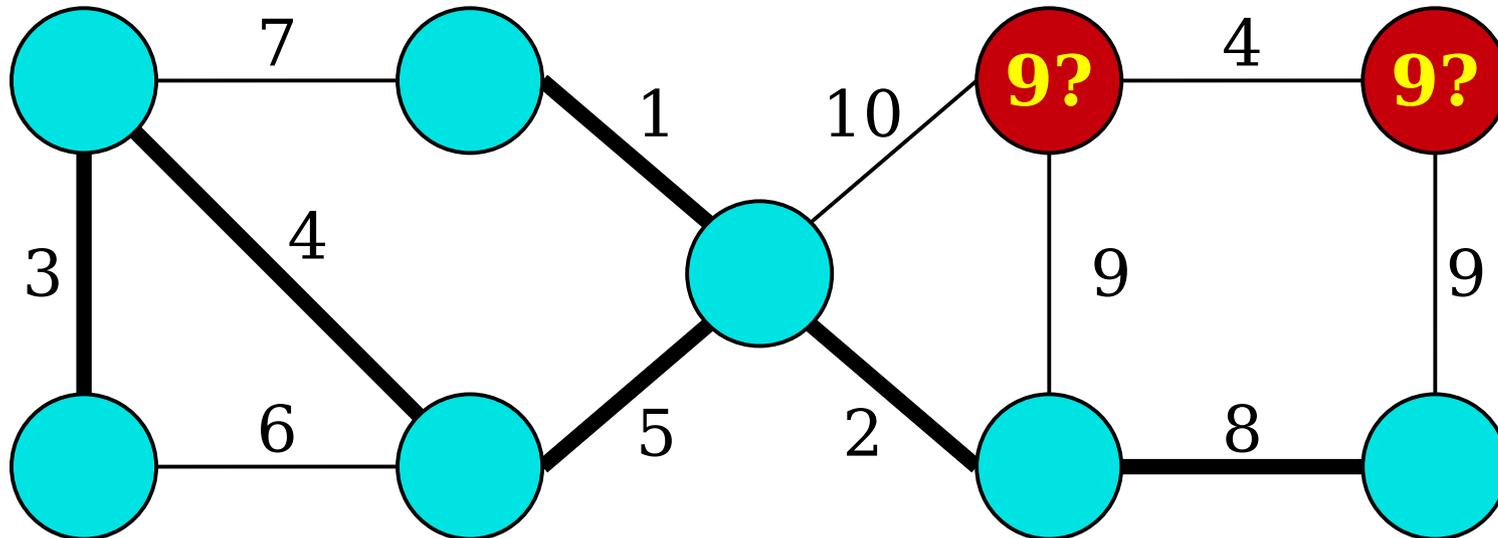


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

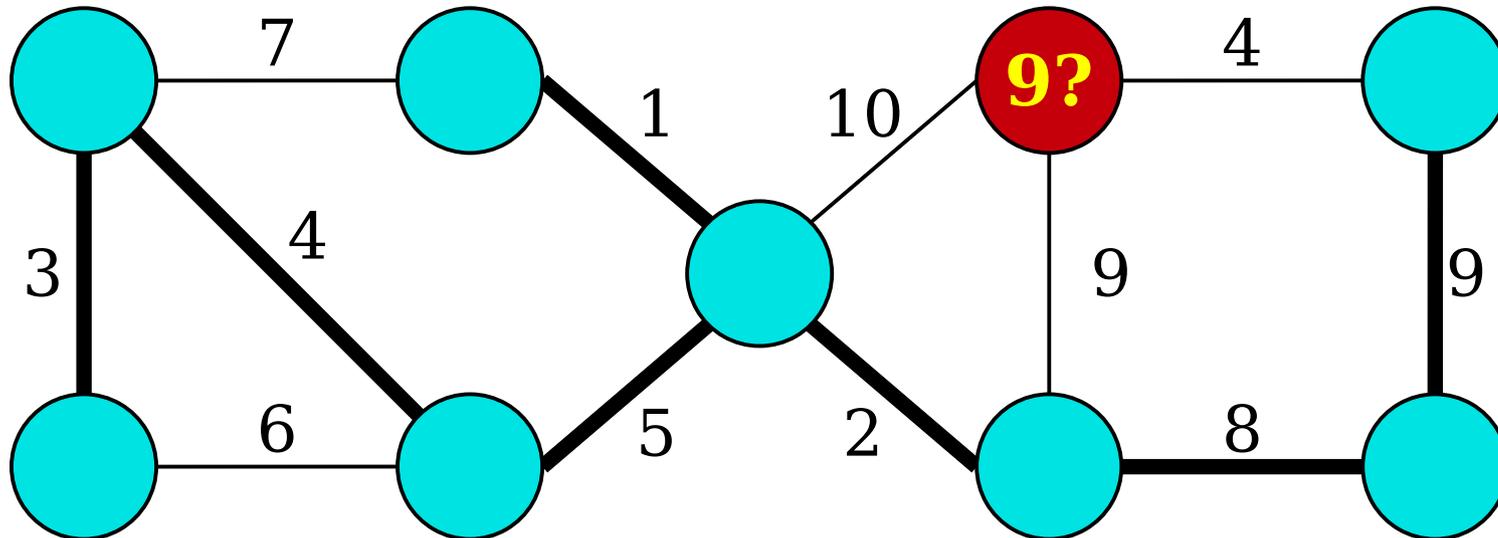


Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

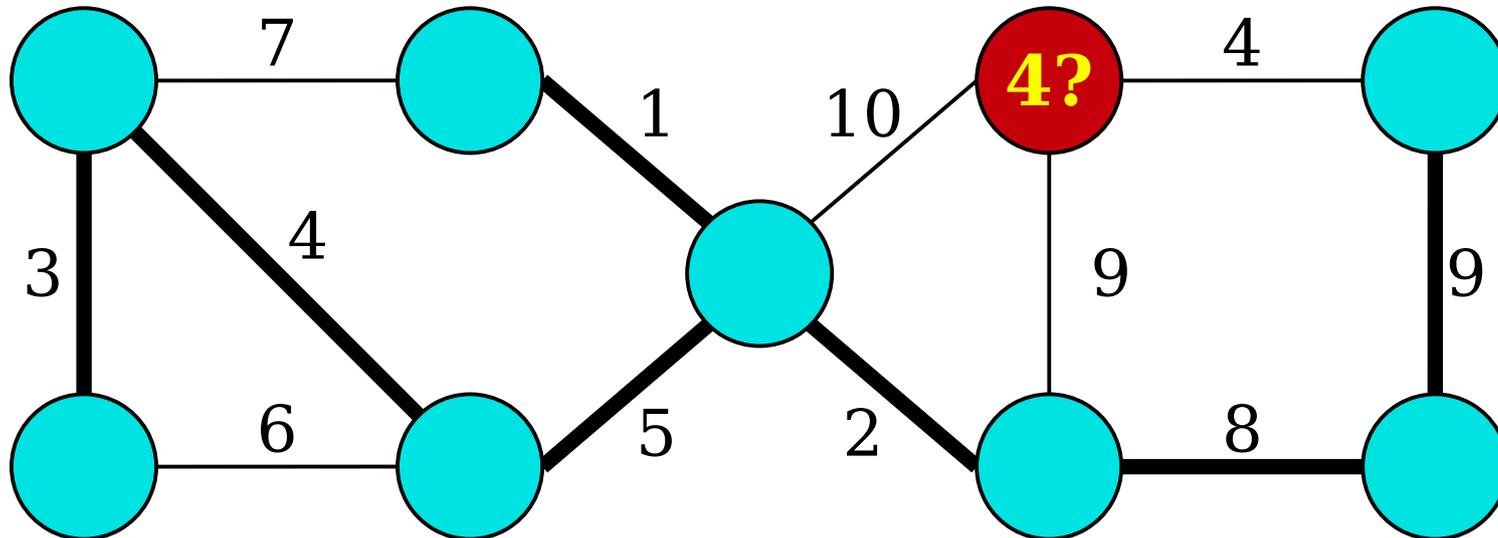

Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.

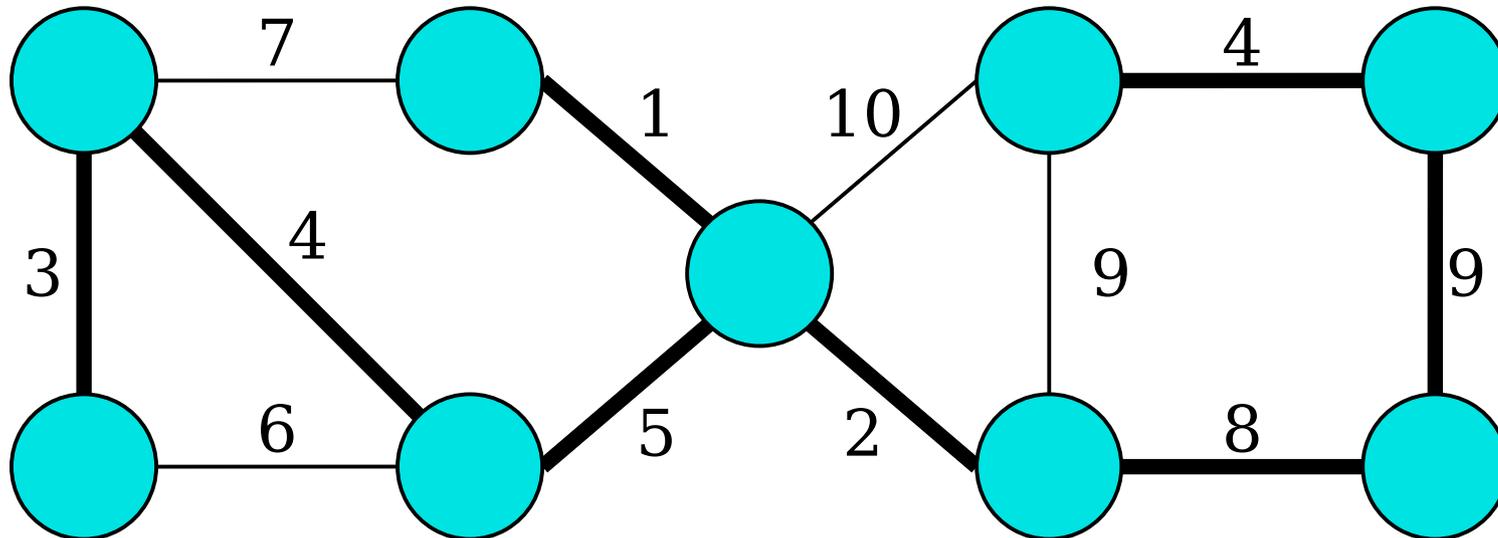

Prim and *decrease-key*

- Prim's algorithm can be implemented with a priority queue using
 - $O(n)$ total *enqueues*,
 - $O(n)$ total *extract-mins*, and
 - $O(m)$ total *decrease-keys*.
- Prim's algorithm runtime is

$$O(n T_{\text{enq}} + n T_{\text{ext}} + m T_{\text{dec}})$$

Standard Approaches

- In a binary heap, *enqueue*, *extract-min*, and *decrease-key* can be made to work in time $O(\log n)$ time each.
- Cost of Dijkstra's / Prim's algorithm:
$$O(n T_{\text{enq}} + n T_{\text{ext}} + m T_{\text{dec}})$$
$$= O(n \log n + n \log n + m \log n)$$
$$= \mathbf{O(m \log n)}$$


Standard Approaches

- In a lazy binomial heap, *enqueue* takes amortized time $O(1)$, and *extract-min* and *decrease-key* take amortized time $O(\log n)$.
- Cost of Dijkstra's / Prim's algorithm:
$$O(n T_{\text{enq}} + n T_{\text{ext}} + m T_{\text{dec}})$$
$$= O(n + n \log n + m \log n)$$
$$= \mathbf{O(m \log n)}$$


Where We're Going

- The ***Fibonacci heap*** has these amortized runtimes:
 - ***enqueue***: $O(1)$
 - ***extract-min***: $O(\log n)$.
 - ***decrease-key***: $O(1)$.
- Cost of Prim's or Dijkstra's algorithm:
$$O(n T_{\text{enq}} + n T_{\text{ext}} + m T_{\text{dec}})$$
$$= O(n + n \log n + m)$$
$$= \mathbf{O(m + n \log n)}$$
- This is theoretically optimal for a comparison-based priority queue in Dijkstra's or Prim's algorithms.


The Challenge of *decrease-key*

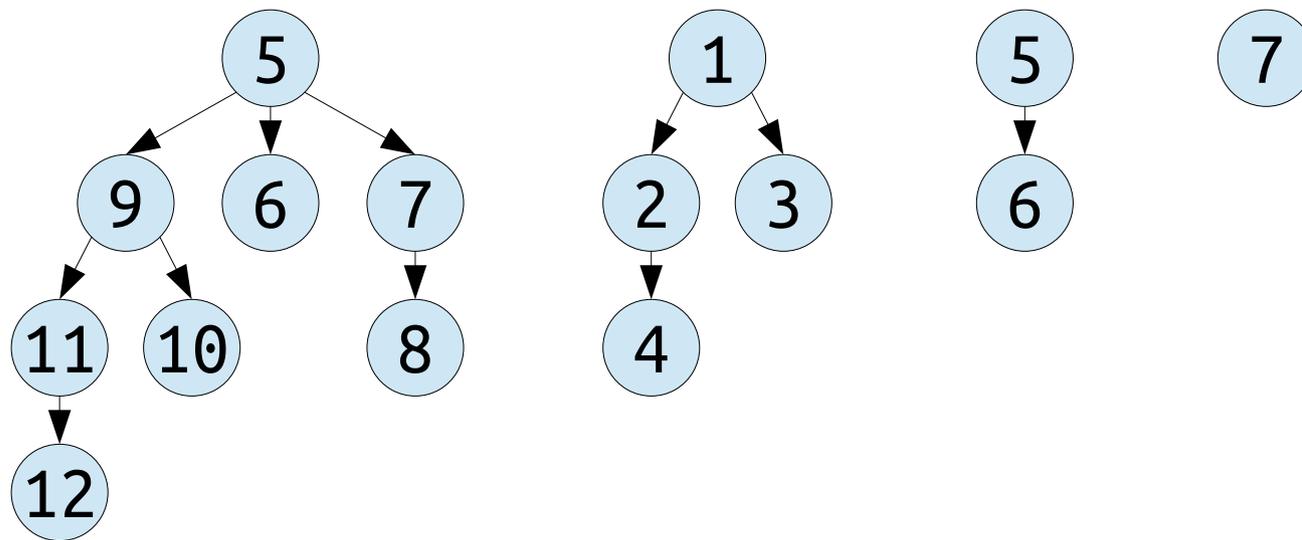


How might we implement
decrease-key in a lazy binomial heap?

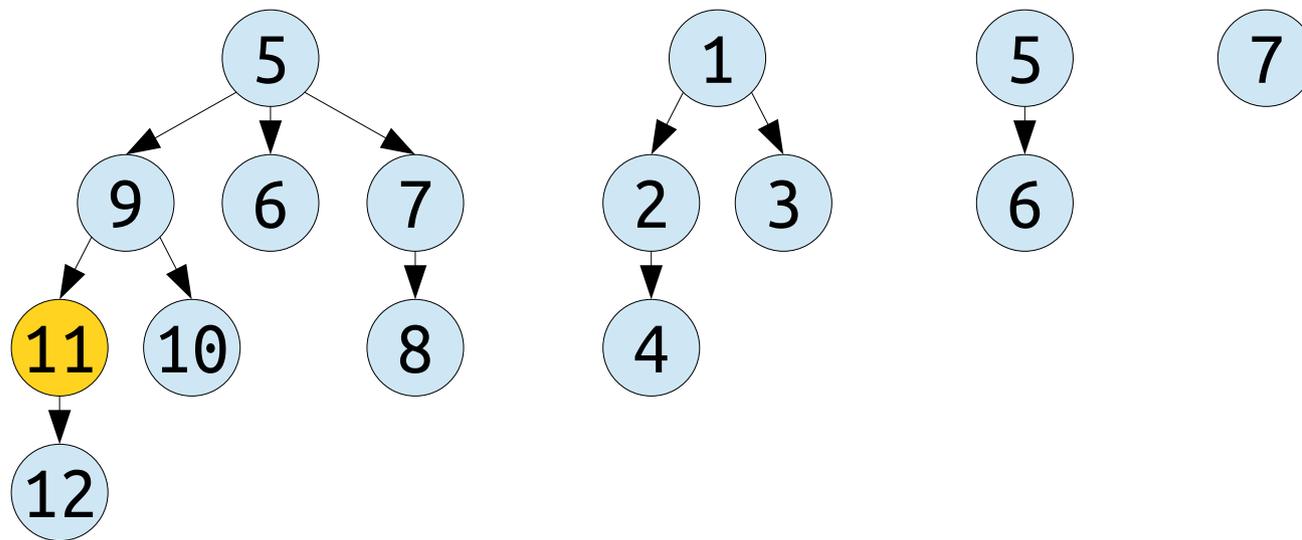


How might we implement
decrease-key in a lazy binomial heap?

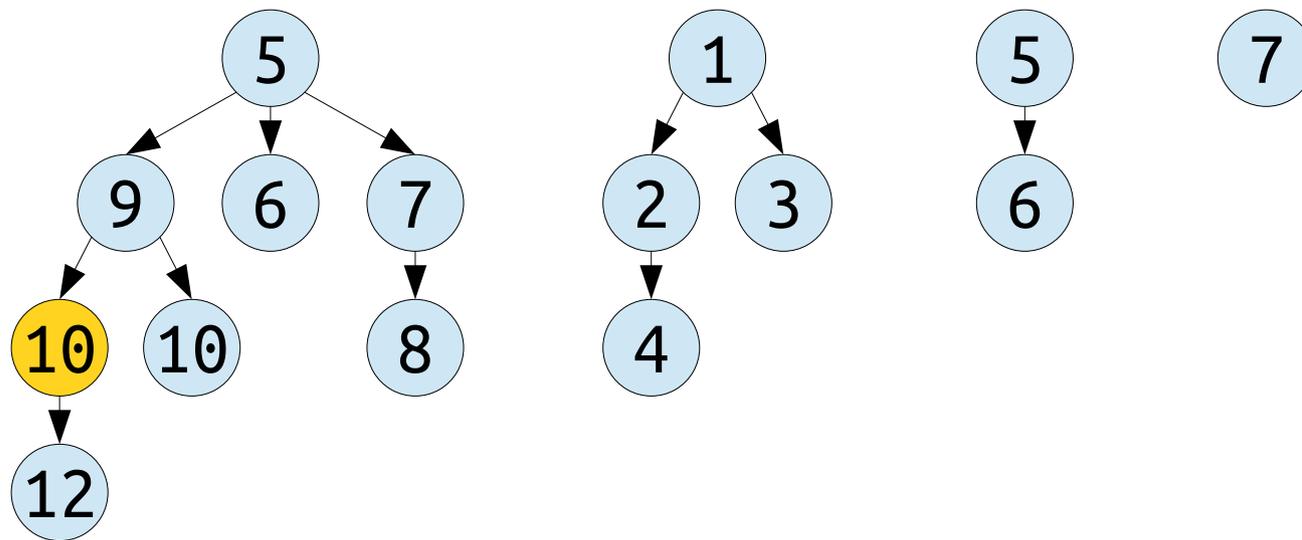


How might we implement
decrease-key in a lazy binomial heap?

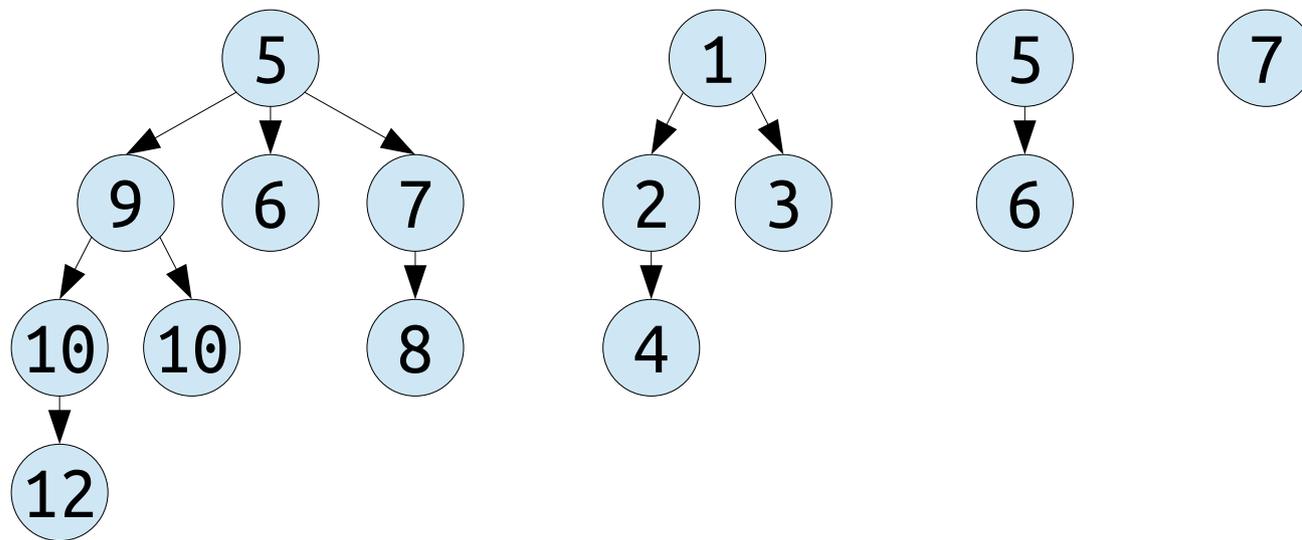


How might we implement *decrease-key* in a lazy binomial heap?

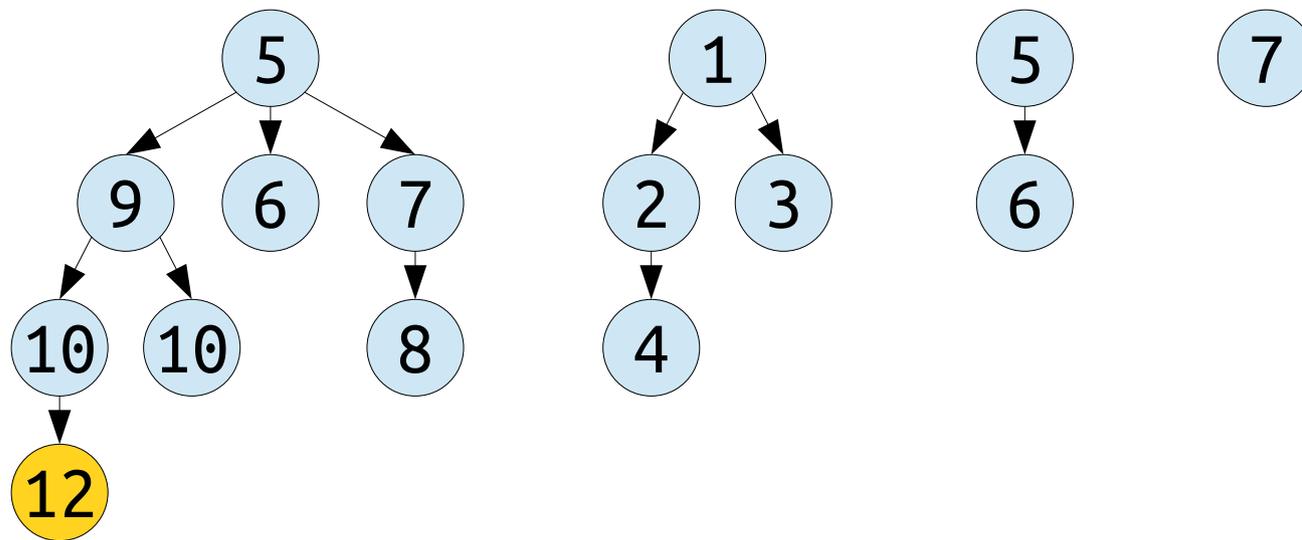


How might we implement
decrease-key in a lazy binomial heap?

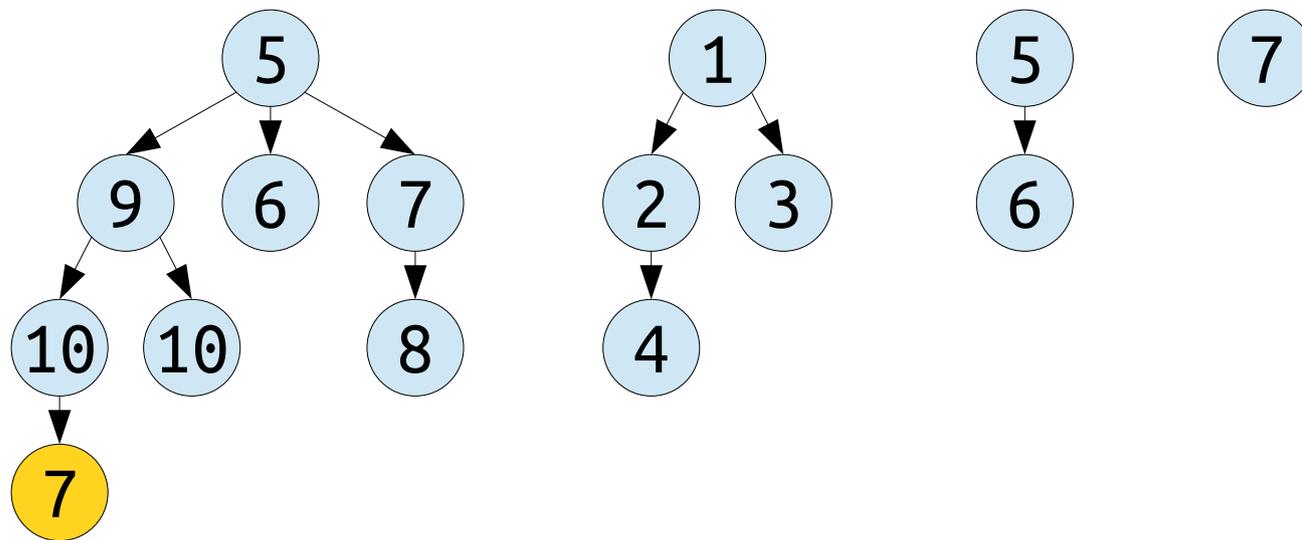

How might we implement
decrease-key in a lazy binomial heap?

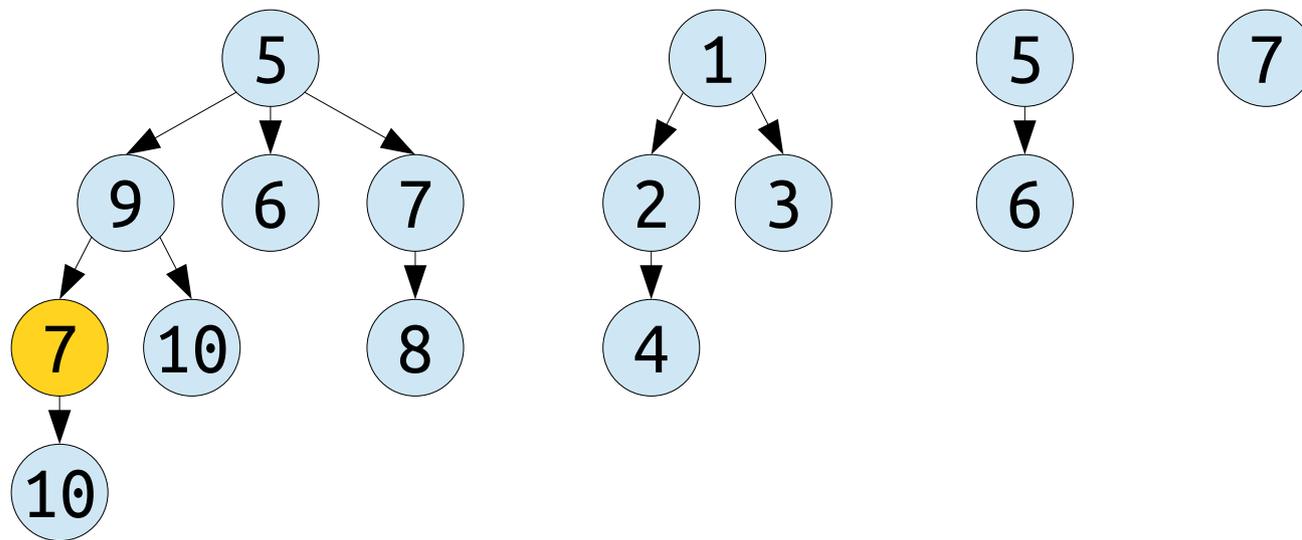


How might we implement
decrease-key in a lazy binomial heap?

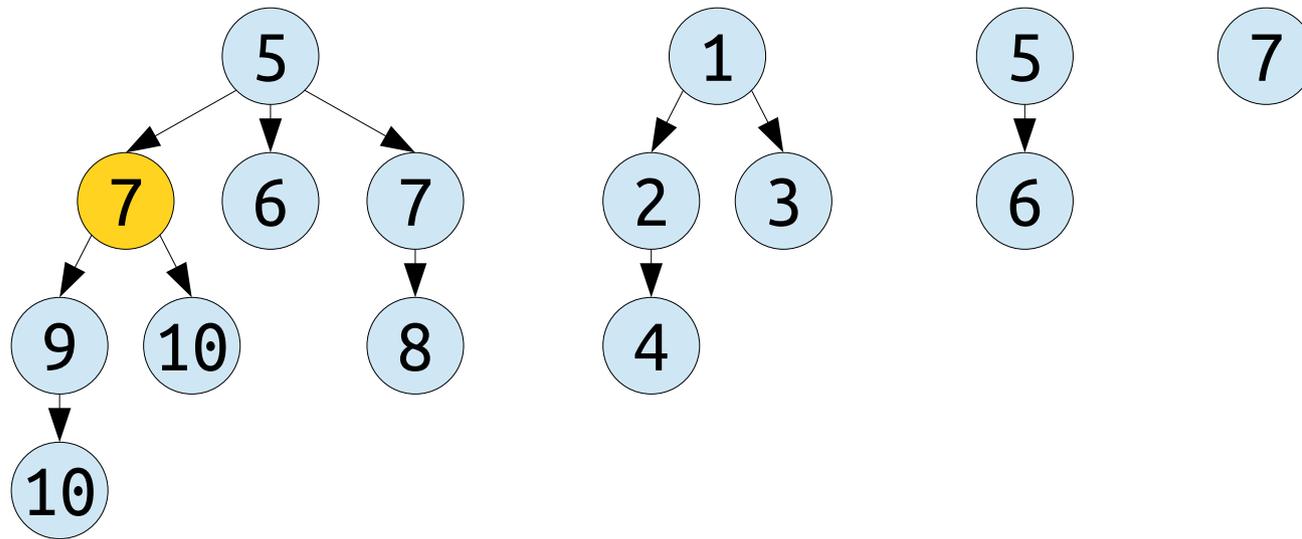

How might we implement
decrease-key in a lazy binomial heap?

If our lazy binomial heap has n nodes, how tall can the tallest tree be?

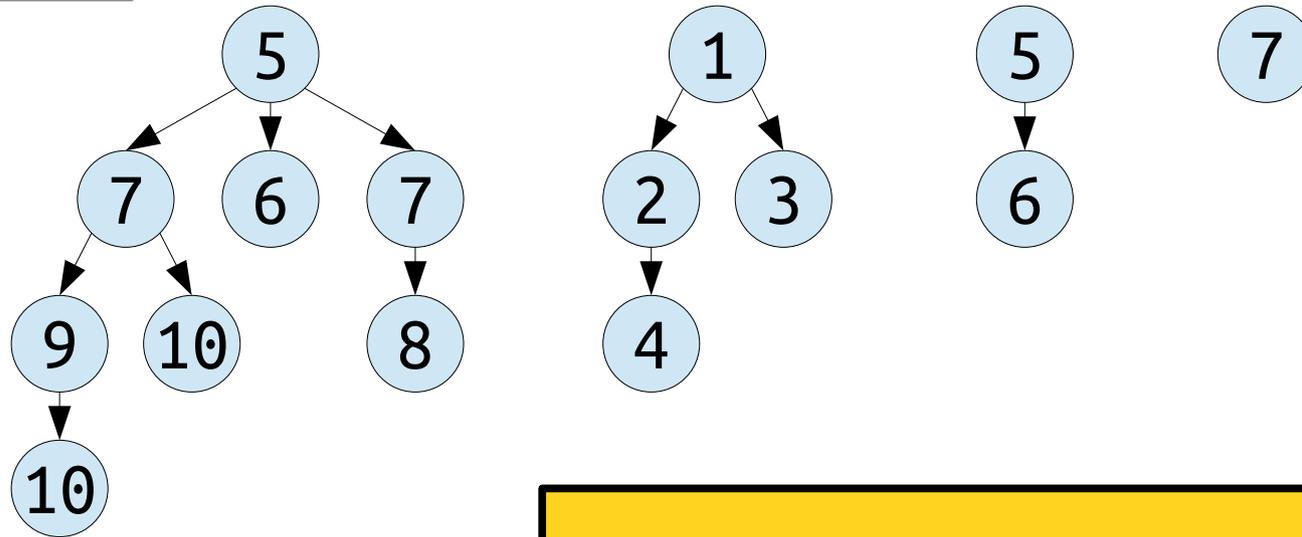


Answer at

<https://cs166.stanford.edu/pollev>

How might we implement *decrease-key* in a lazy binomial heap?

If our lazy binomial heap has n nodes, how tall can the tallest tree be?

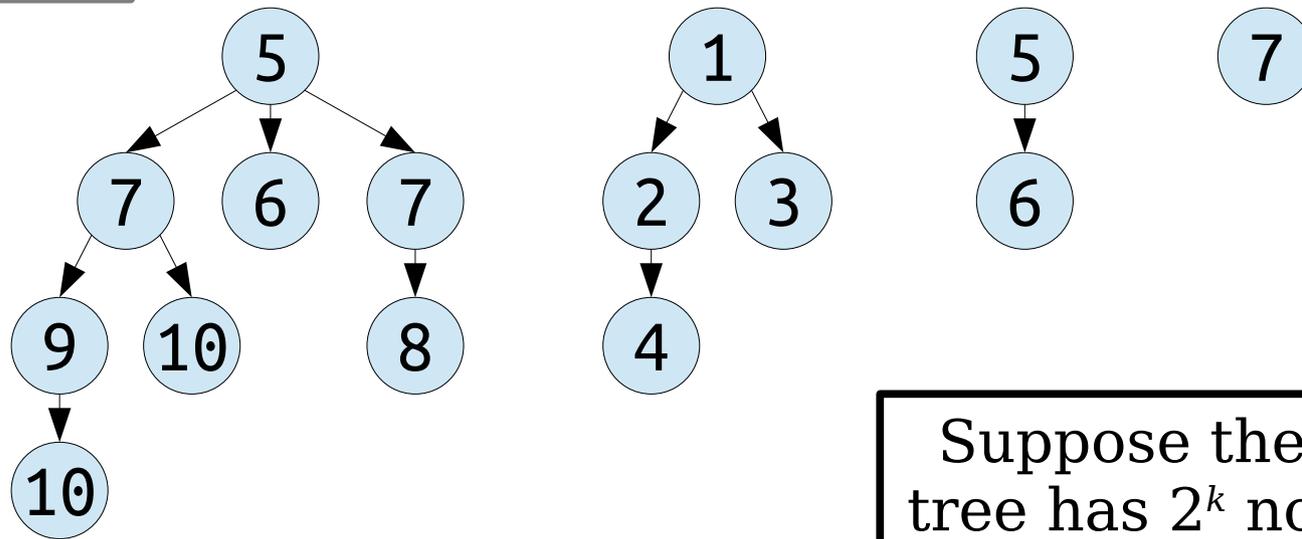


Suppose the biggest tree has 2^k nodes in it.

Then $2^k \leq n$.

So $k = O(\log n)$.

How might we implement *decrease-key* in a lazy binomial heap?

If our lazy binomial heap has n nodes, how tall can the tallest tree be?

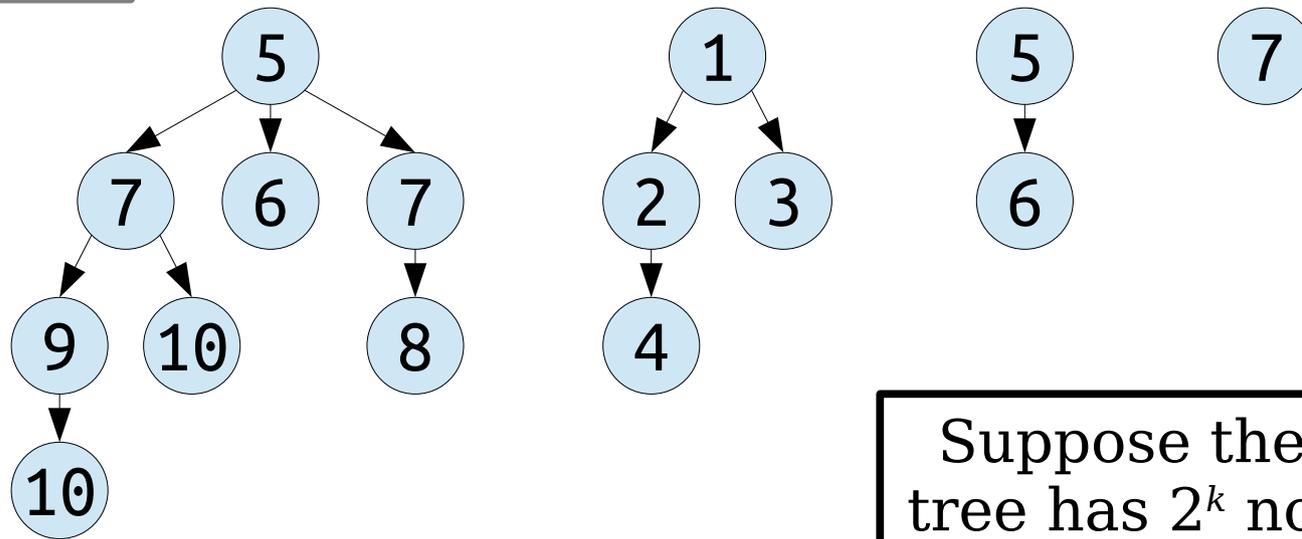


Suppose the biggest tree has 2^k nodes in it.


Then $2^k \leq n$.

So $k = O(\log n)$.


Challenge: Support *decrease-key* in (amortized) time $O(1)$.

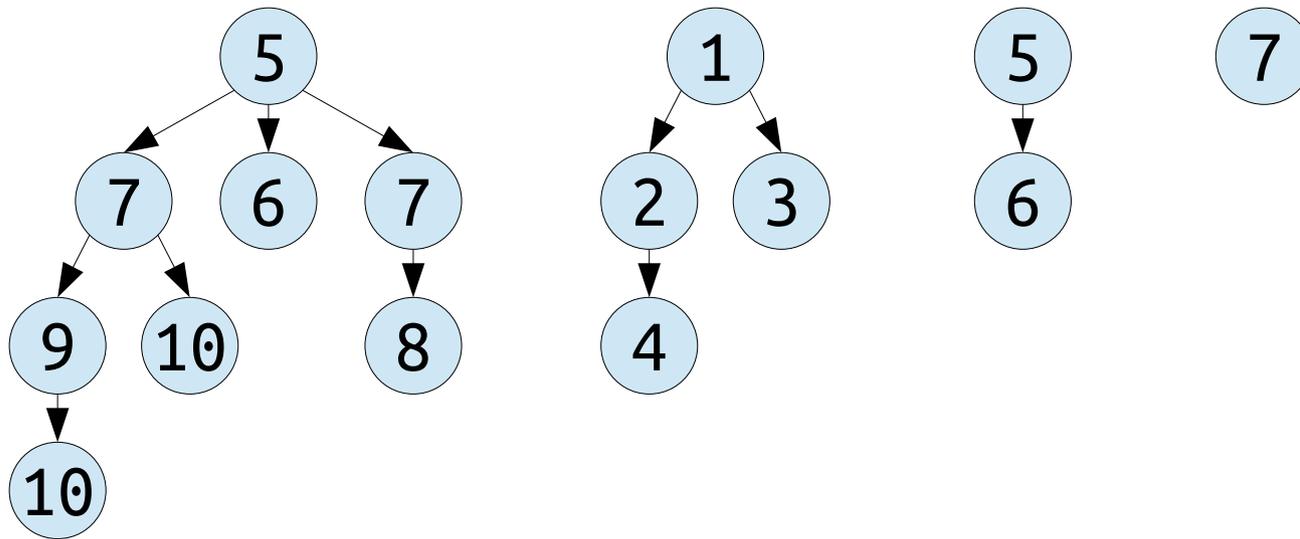


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

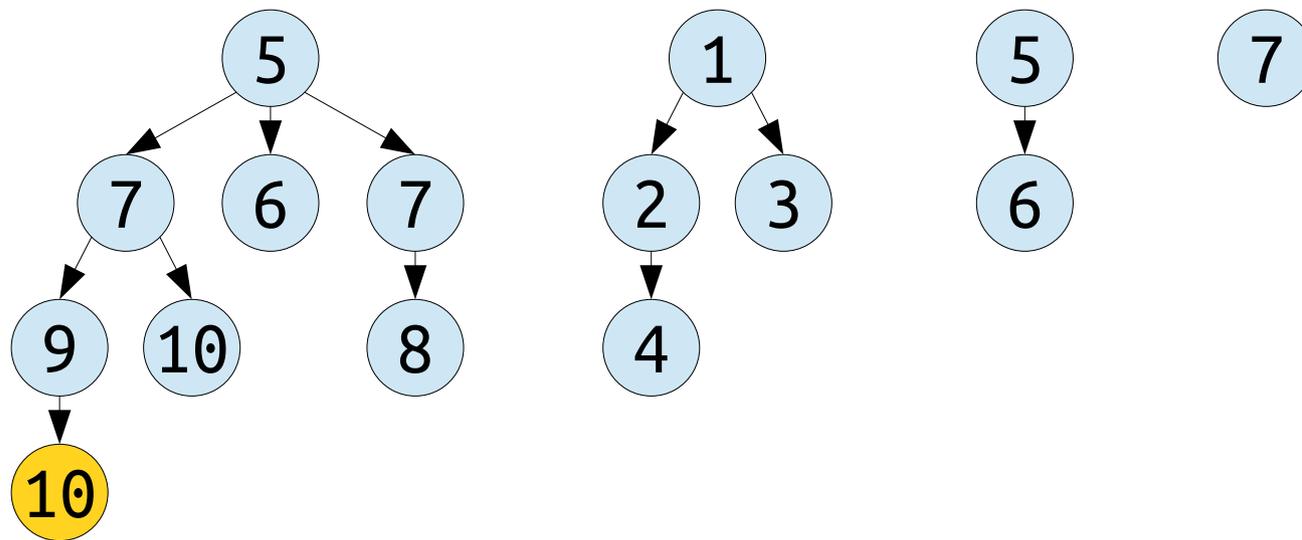

Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

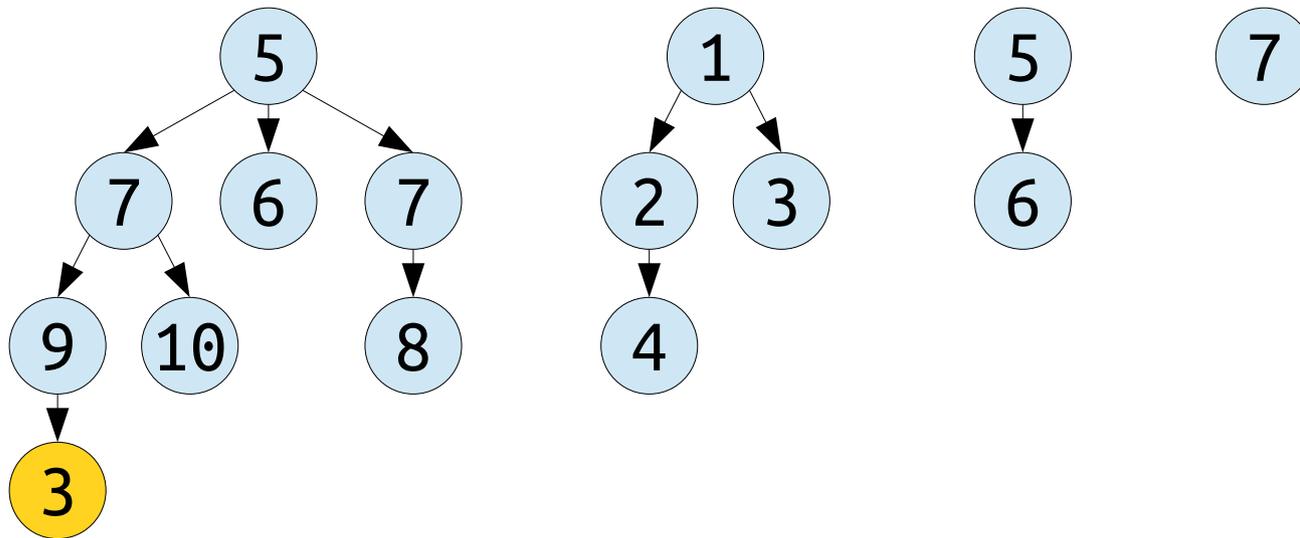


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

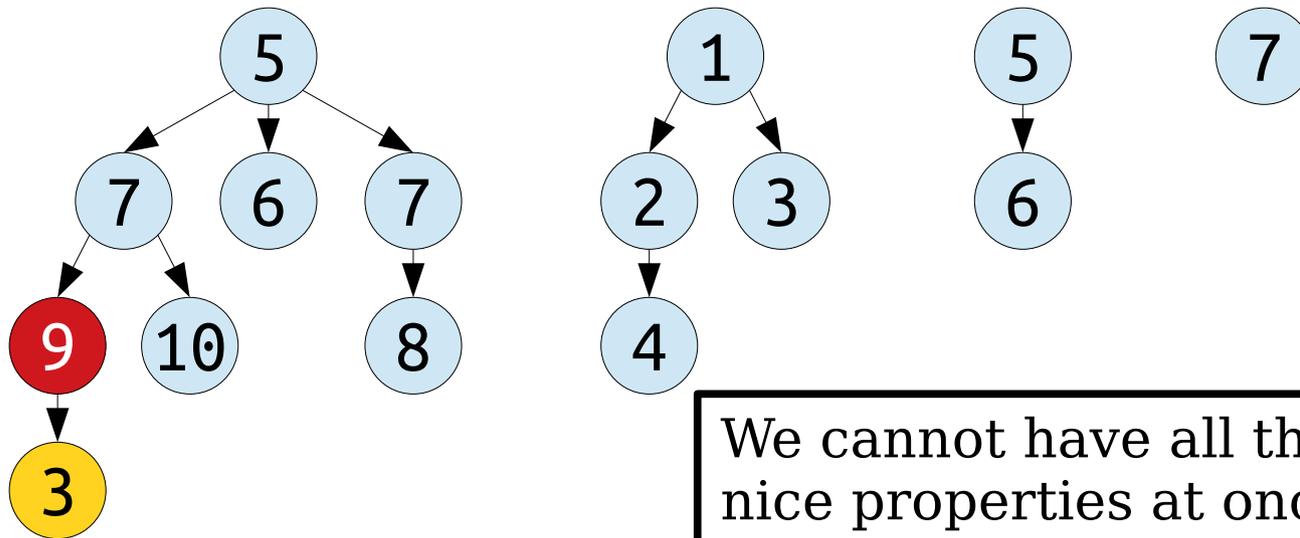

We cannot have all three of these nice properties at once:

1. *decrease-key* takes time $O(1)$.
2. Our trees are heap-ordered.
3. Our trees are binomial trees.


Challenge: Support *decrease-key* in (amortized) time $O(1)$.

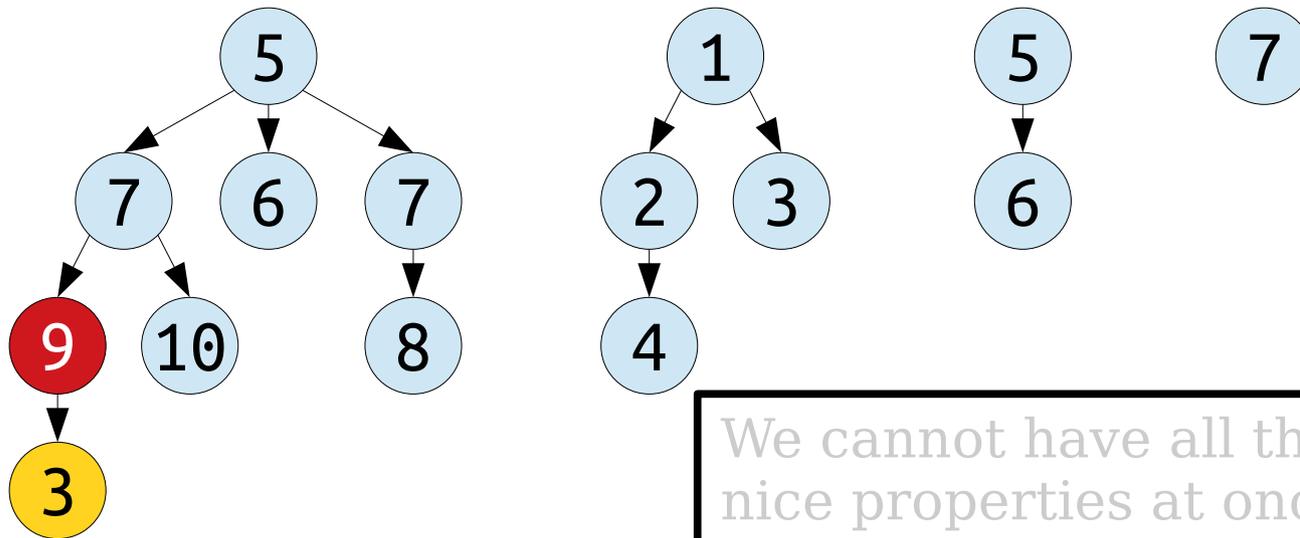


We cannot have all three of these nice properties at once:

1. *decrease-key* takes time $O(1)$.
2. Our trees are heap-ordered.
3. Our trees are binomial trees.

Challenge: Support *decrease-key* in (amortized) time $O(1)$.

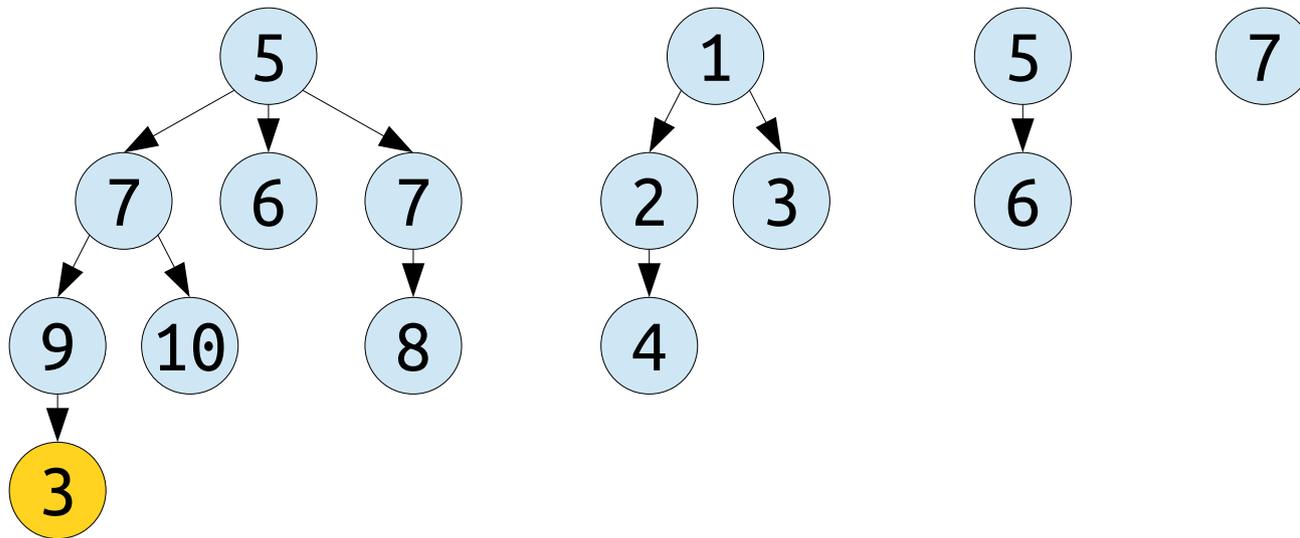


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

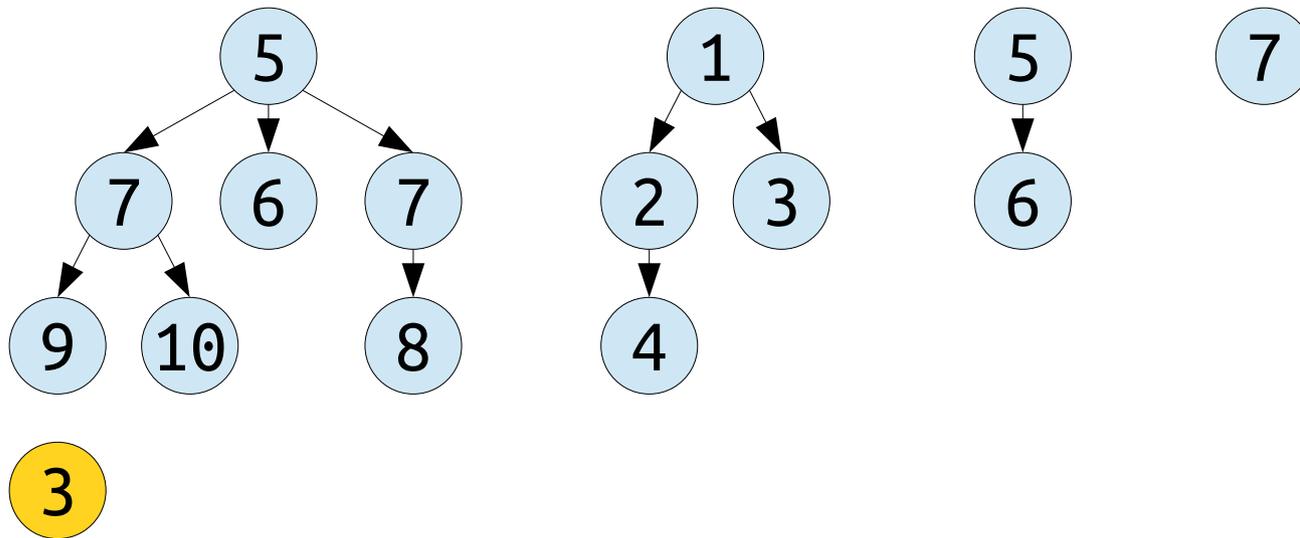


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.


3

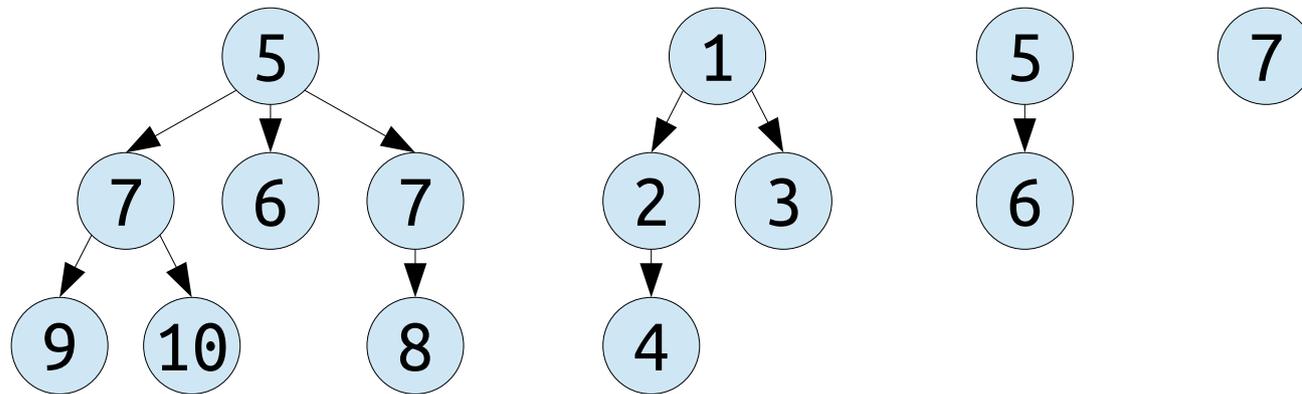


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

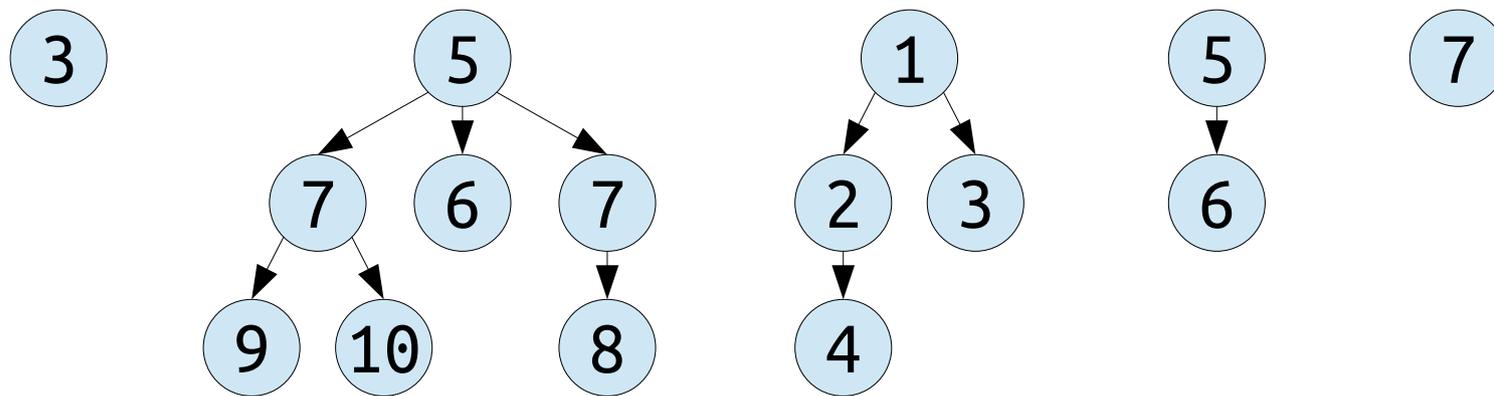


Challenge: Support *decrease-key* in (amortized) time $O(1)$.

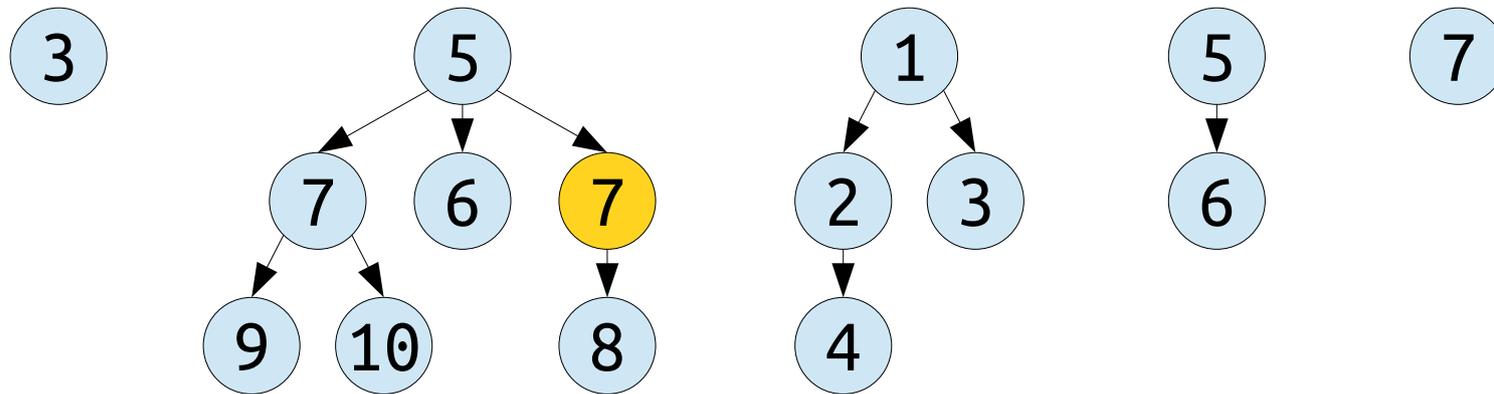


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

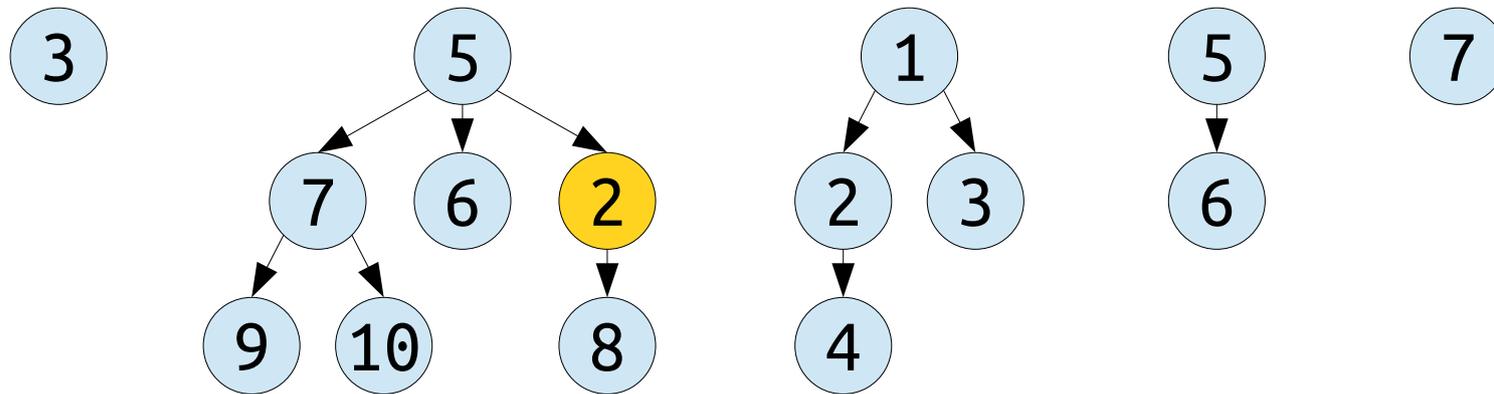


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

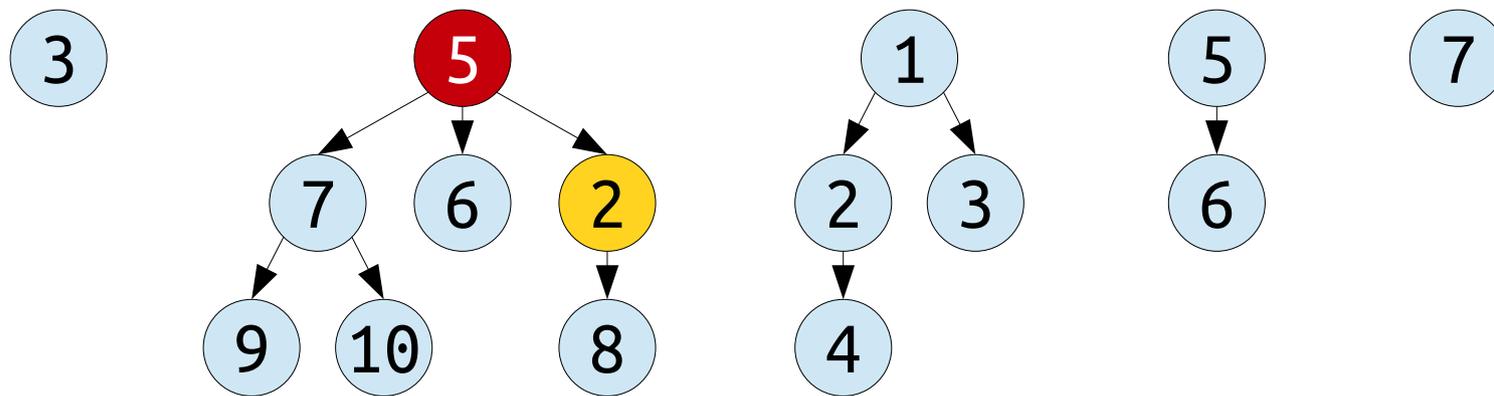


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

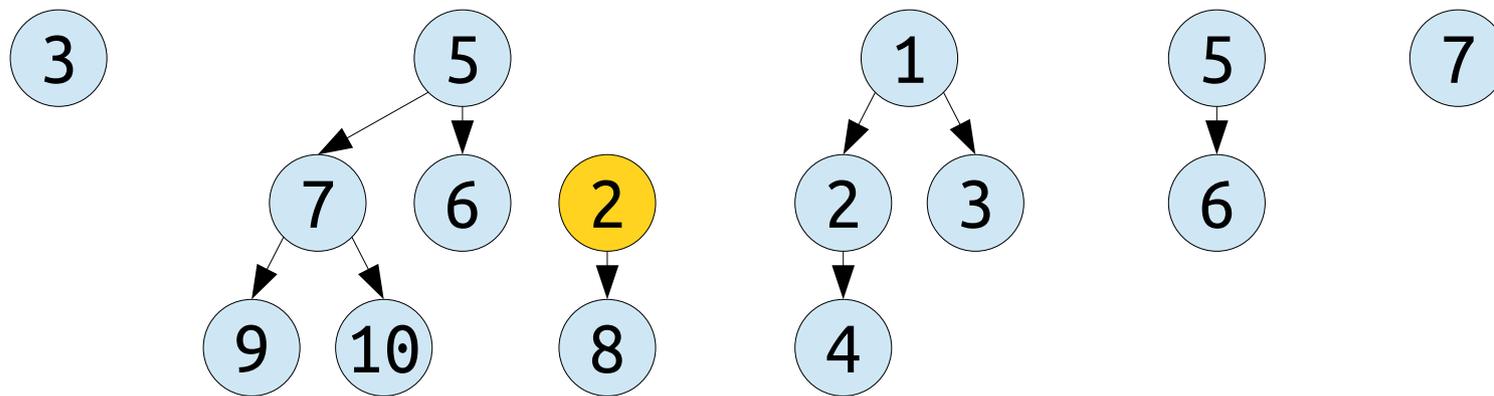


Challenge: Support *decrease-key* in (amortized) time $O(1)$.

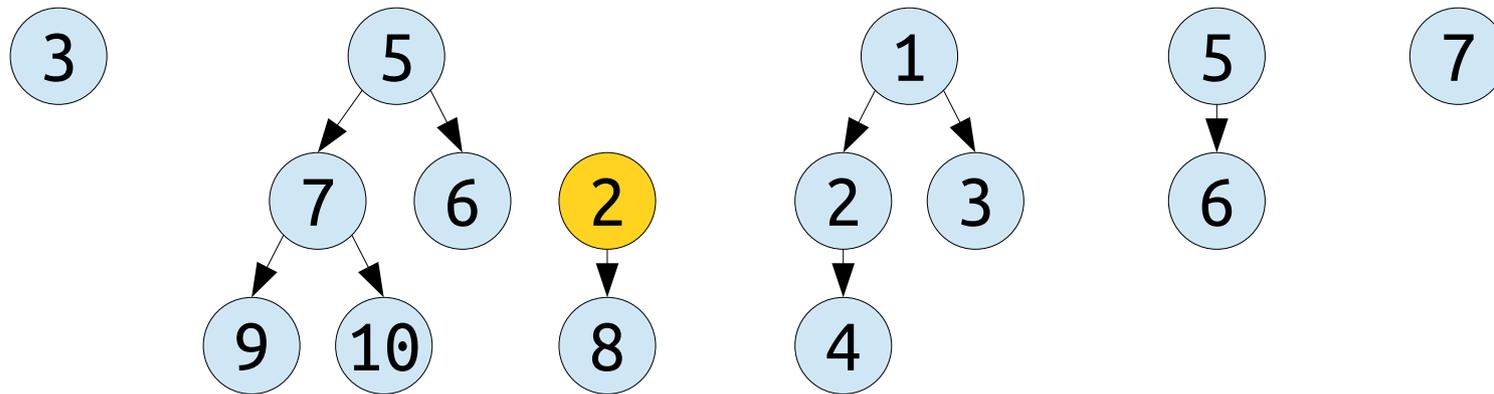


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

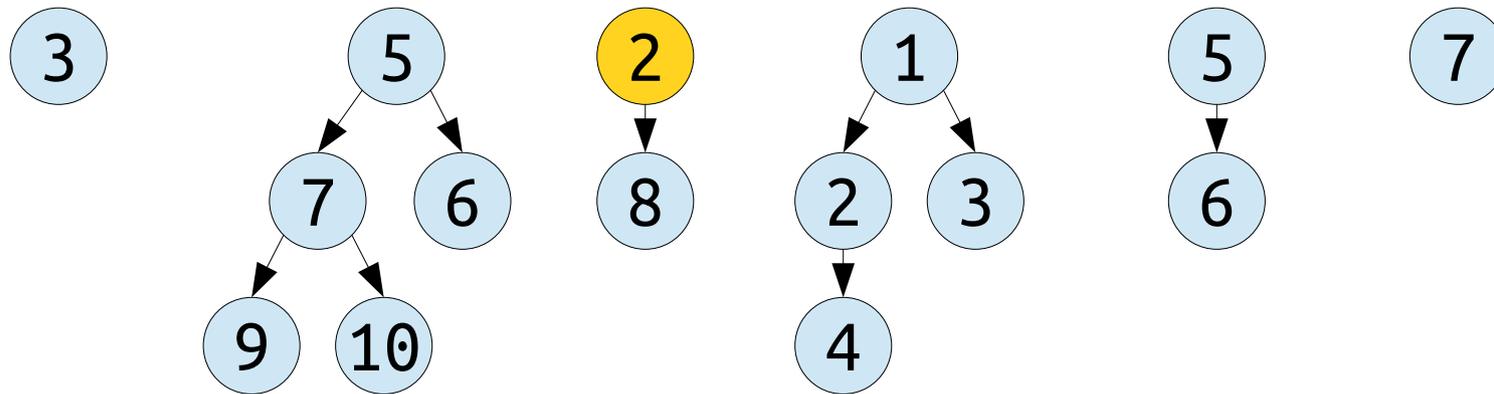


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

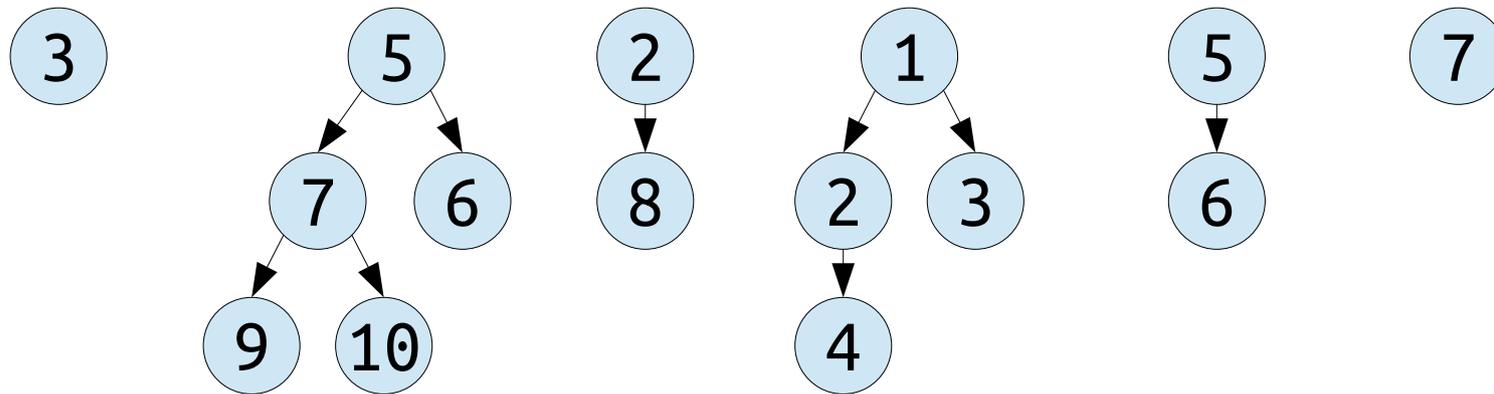


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

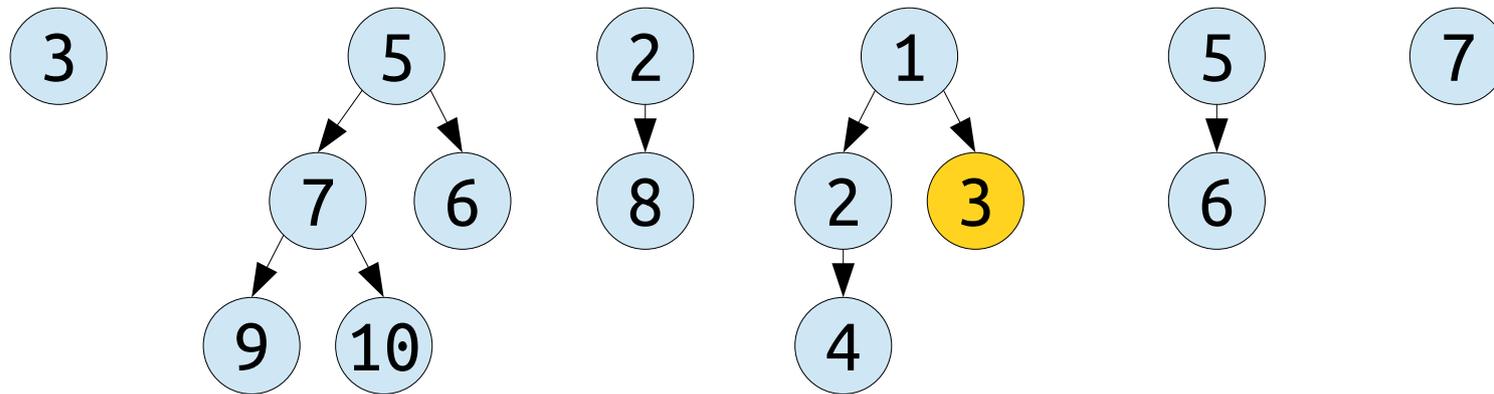


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

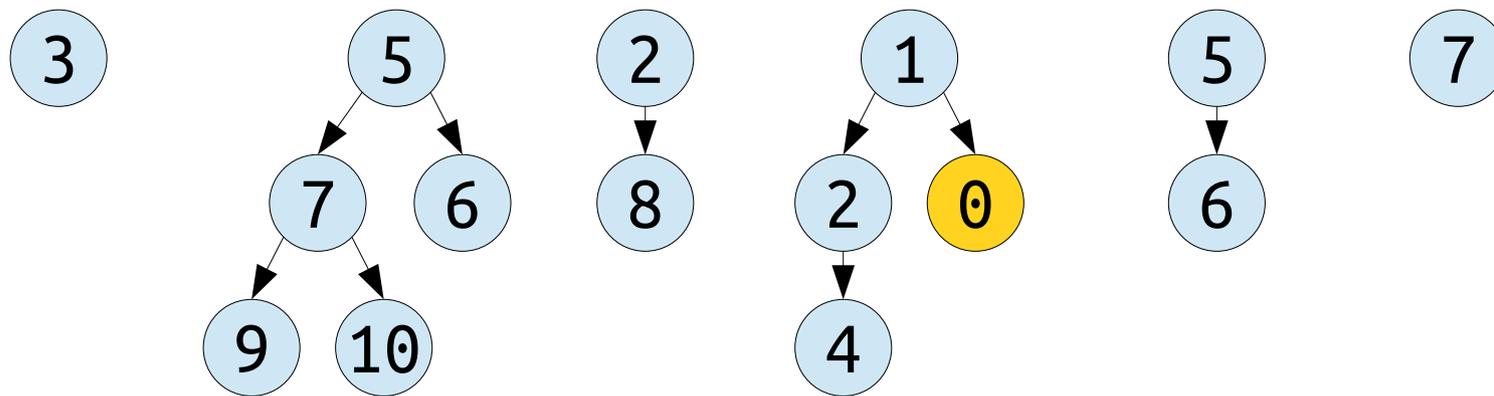


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

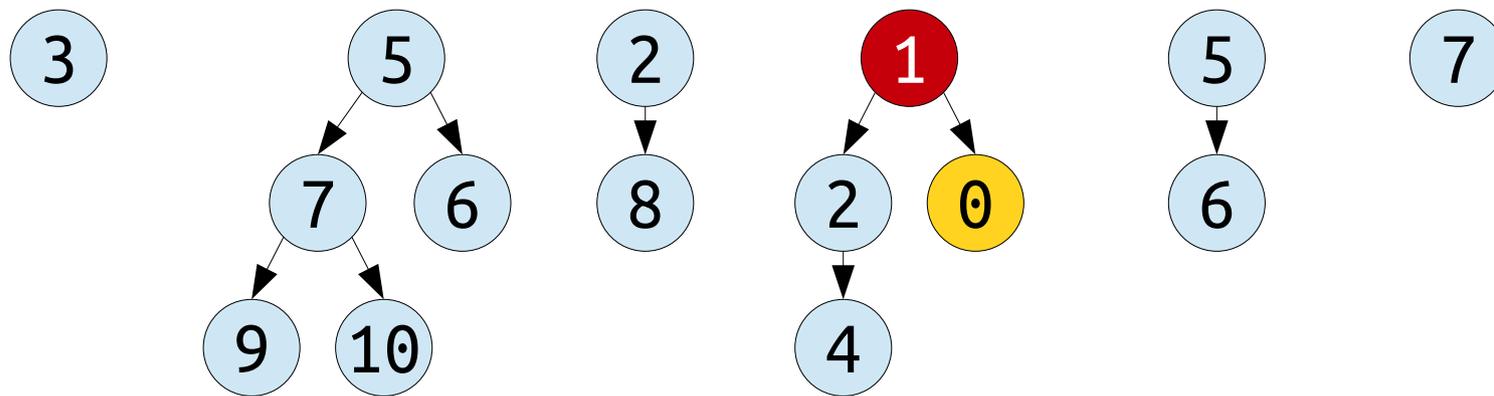


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

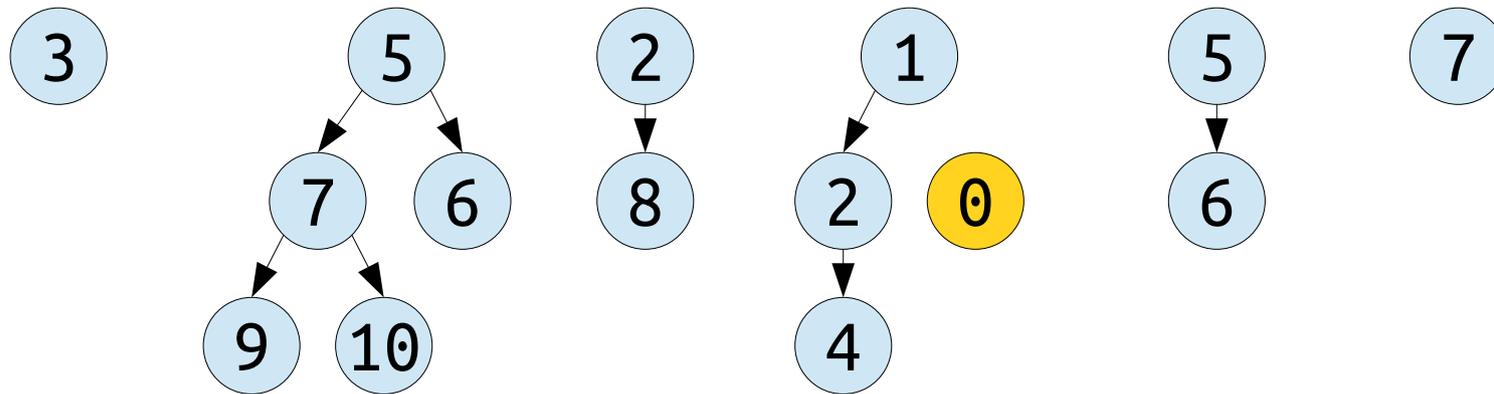


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

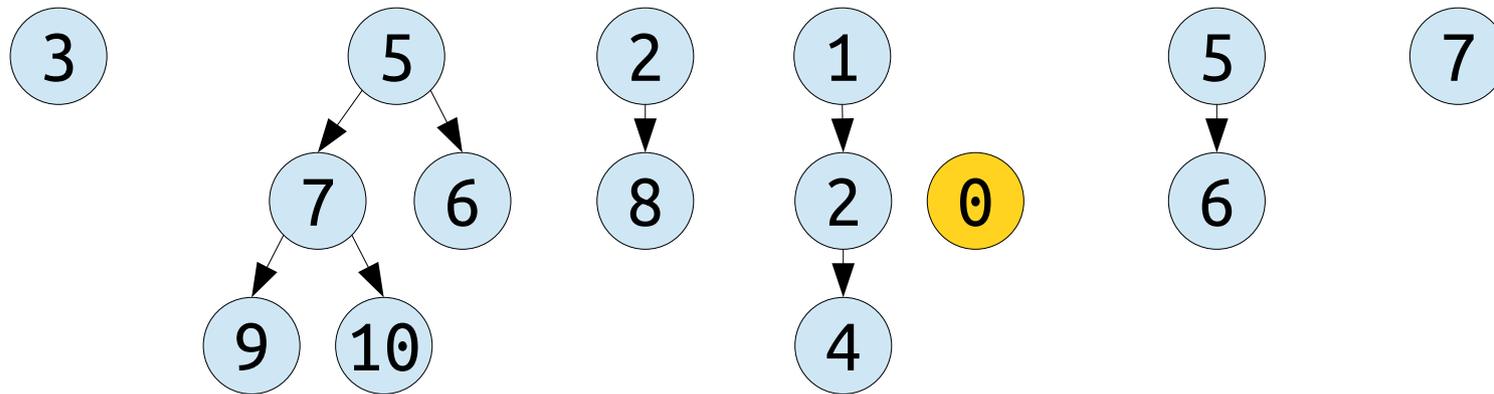


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

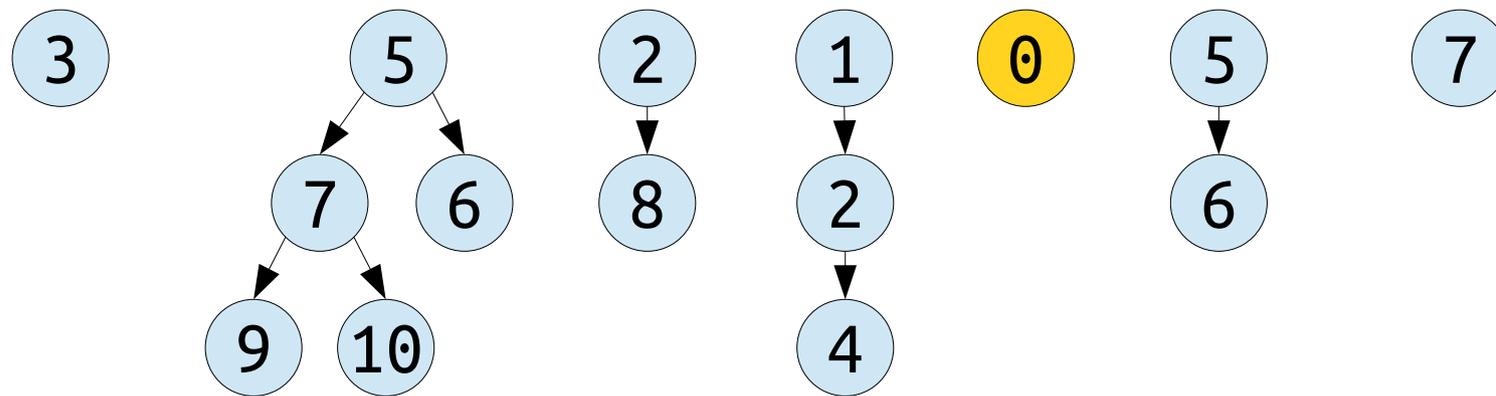


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

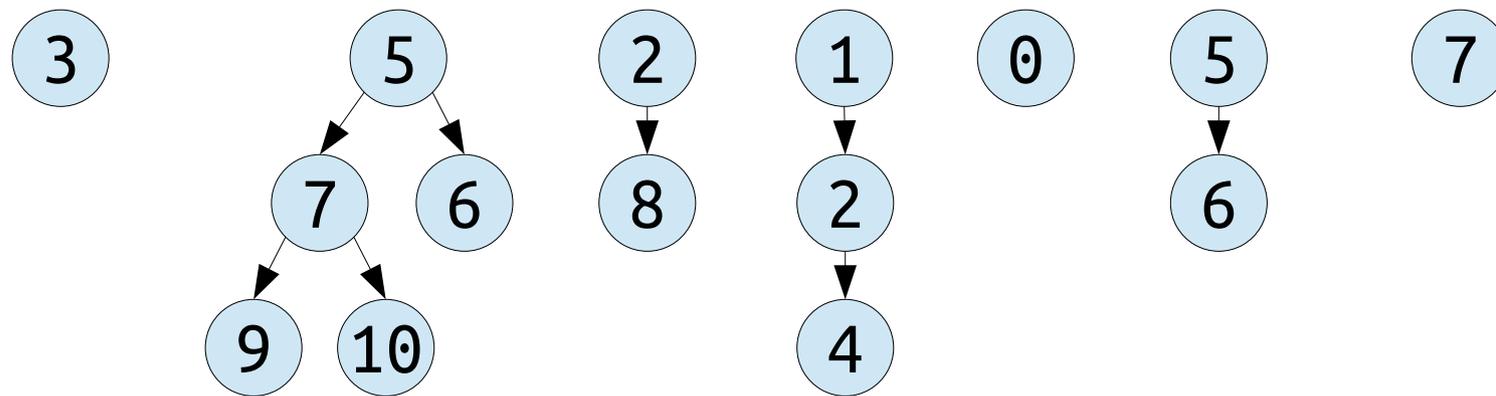


Challenge: Support *decrease-key*
in (amortized) time $O(1)$.

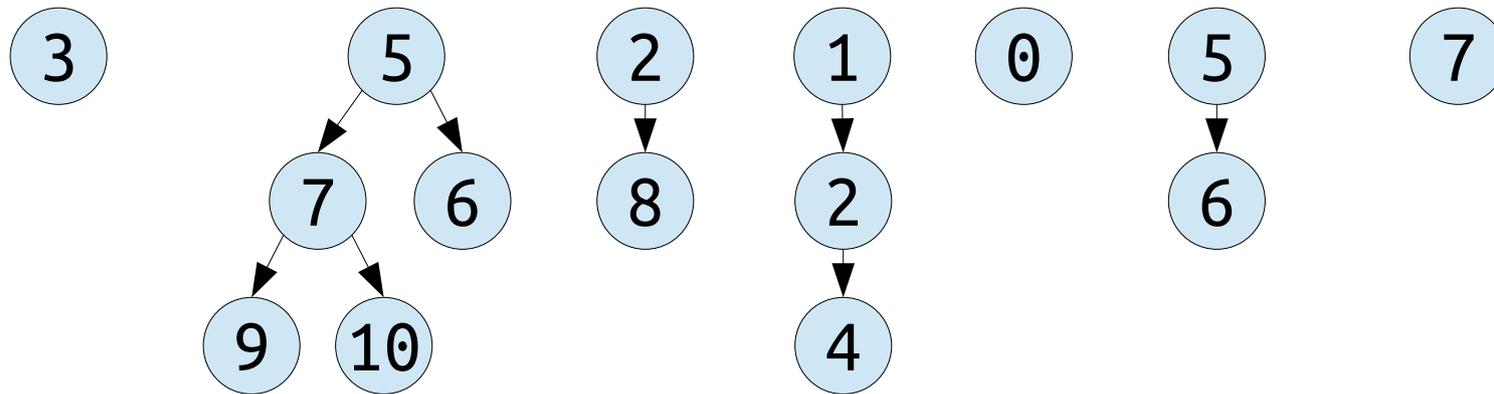



Problem: What do we do in an *extract-min*?

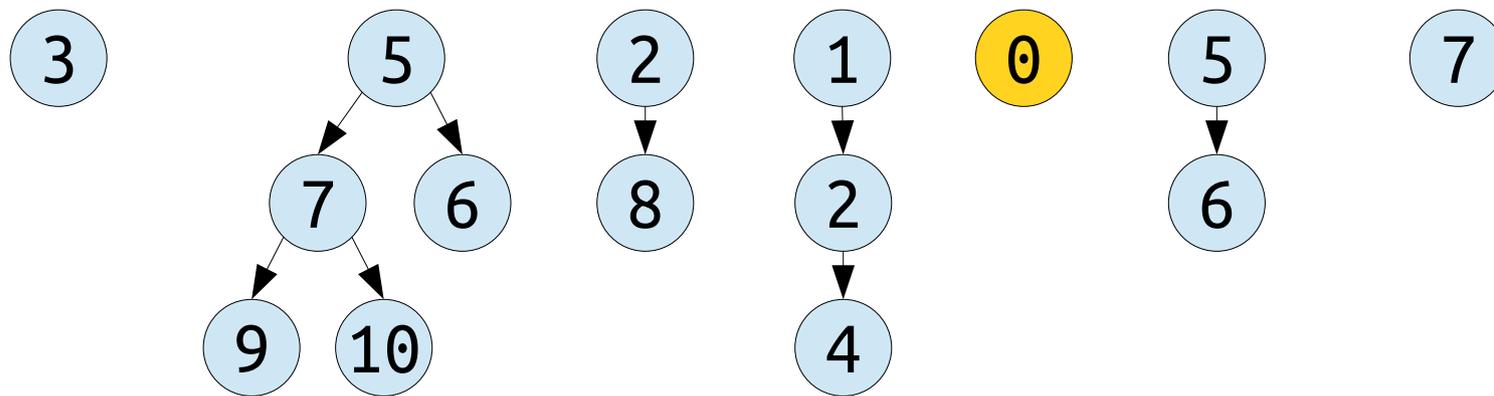

Problem: What do we do in an *extract-min*?


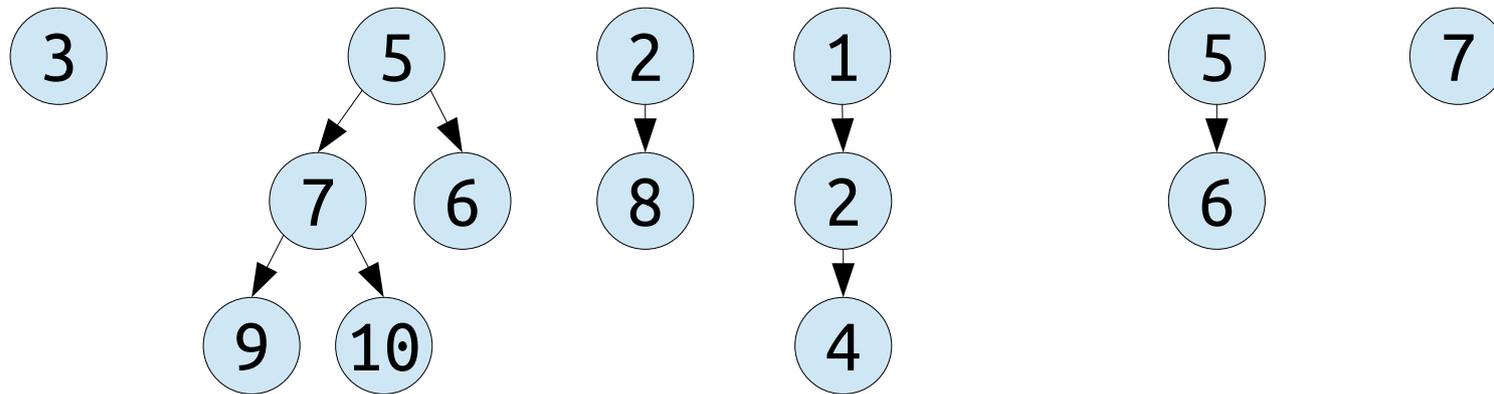


Problem: What do we do in an ***extract-min***?

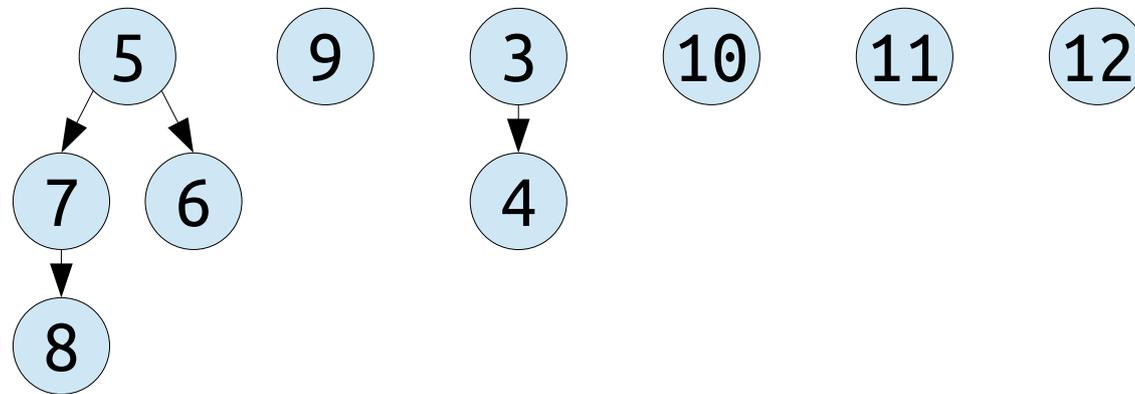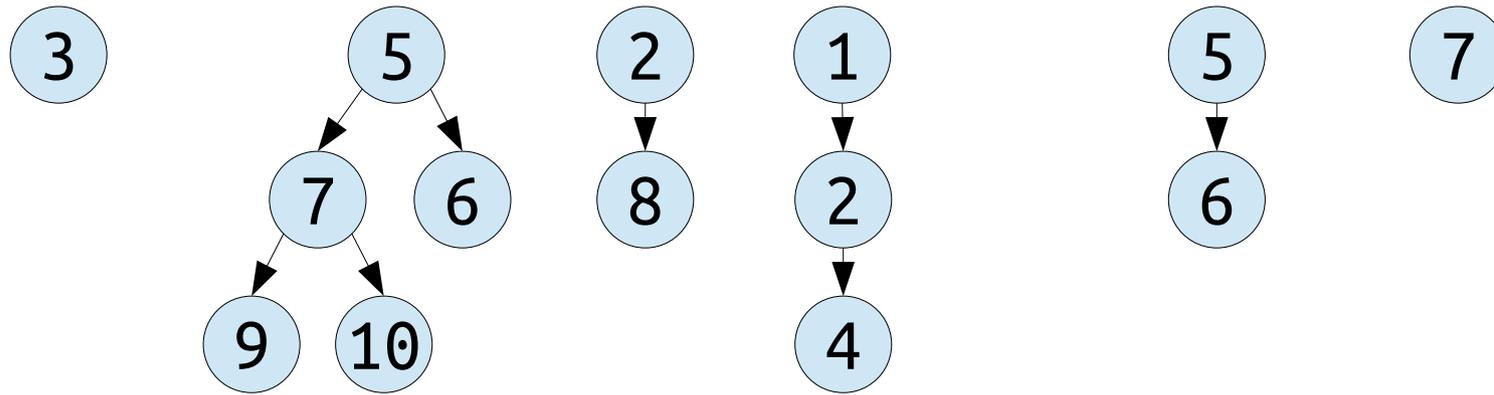



What We Used to Do

Problem: What do we do in an *extract-min*?

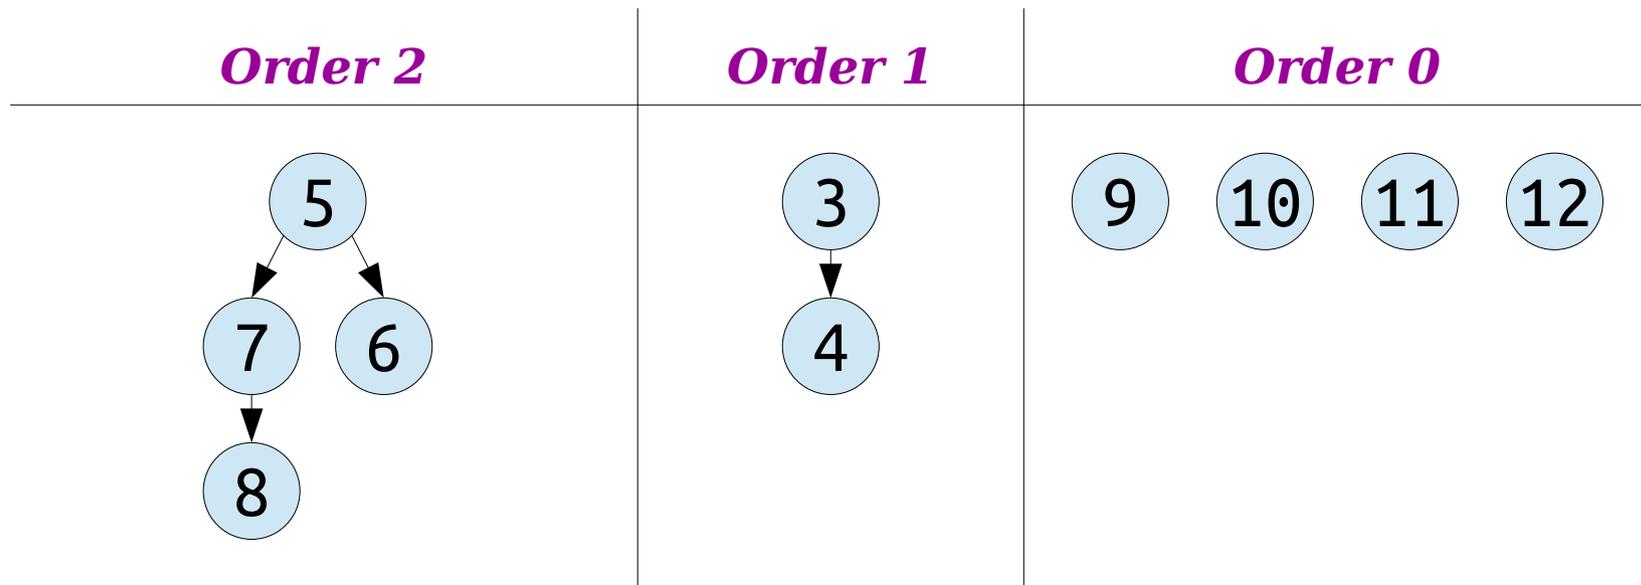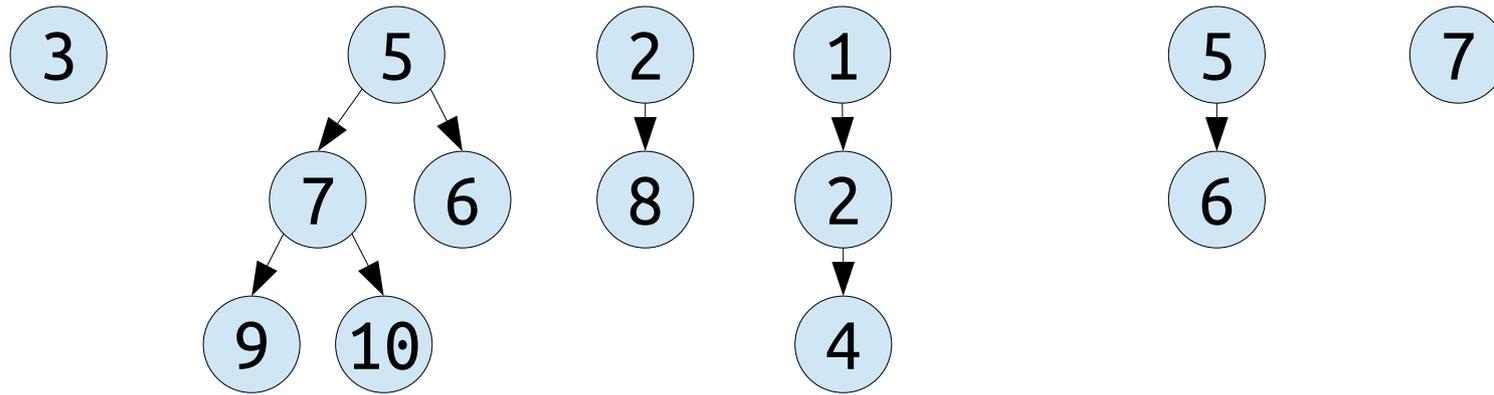



What We Used to Do

Problem: What do we do in an *extract-min*?

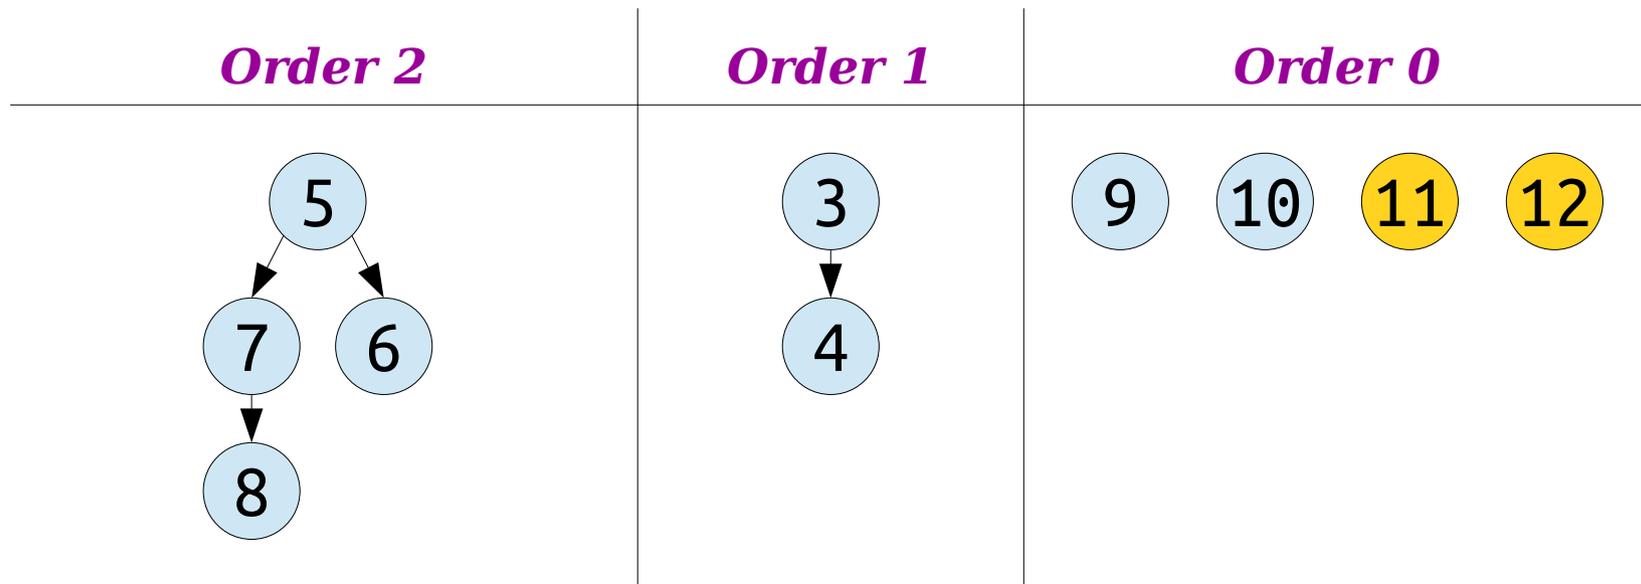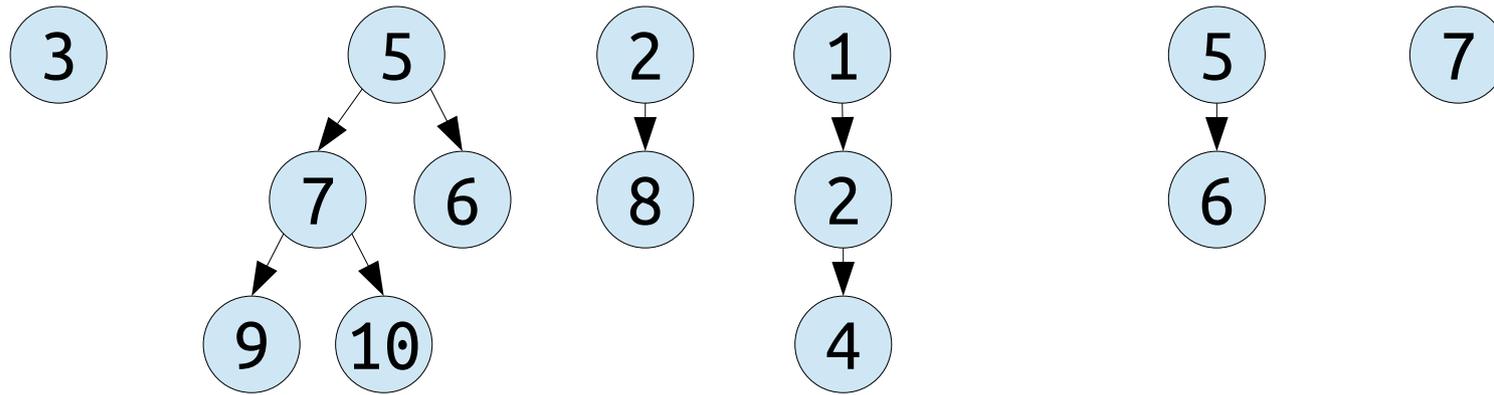



What We Used to Do

Problem: What do we do in an *extract-min*?

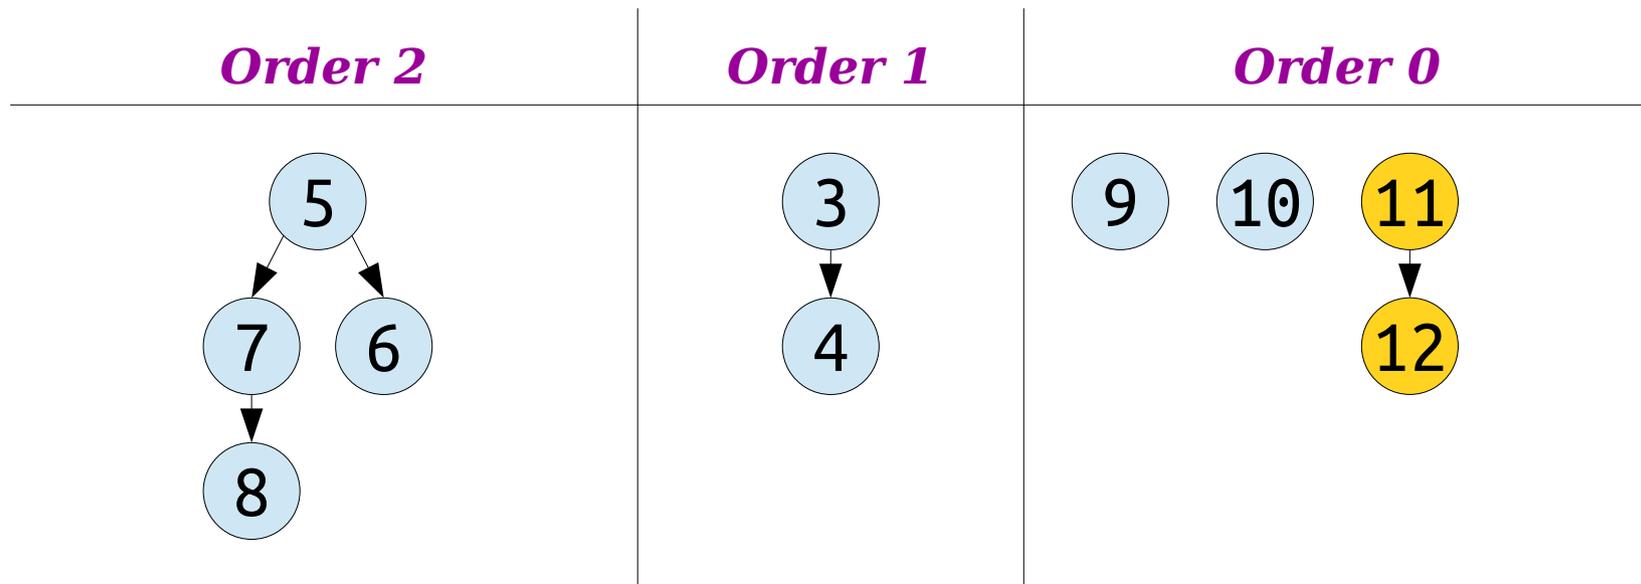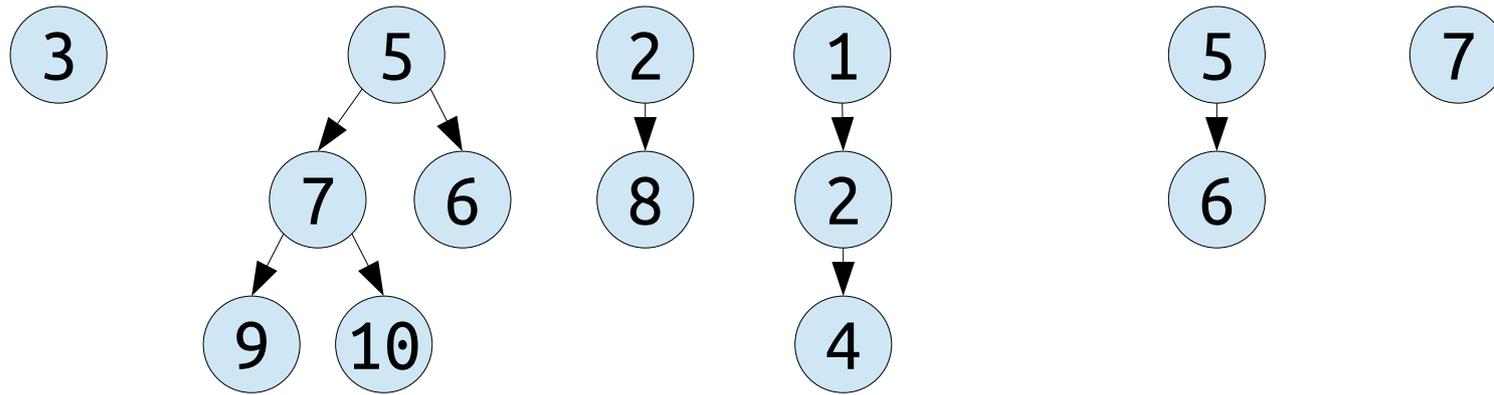



What We Used to Do

Problem: What do we do in an *extract-min*?

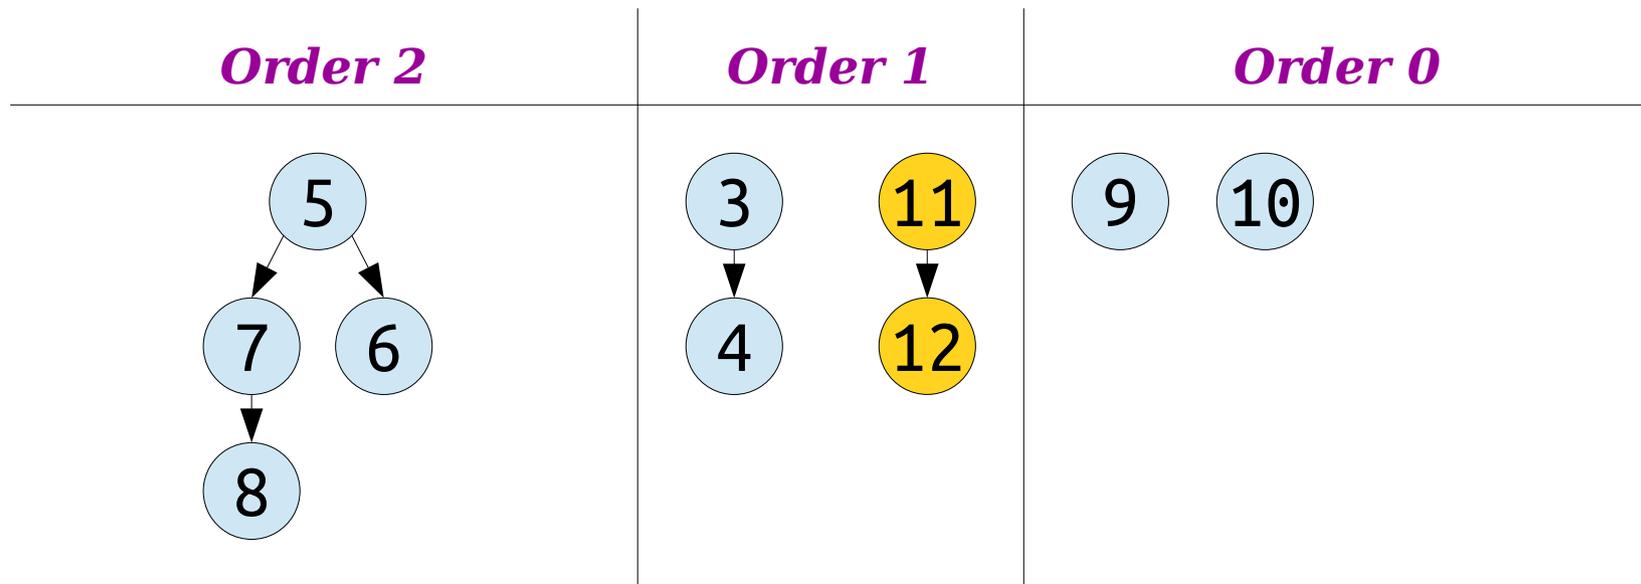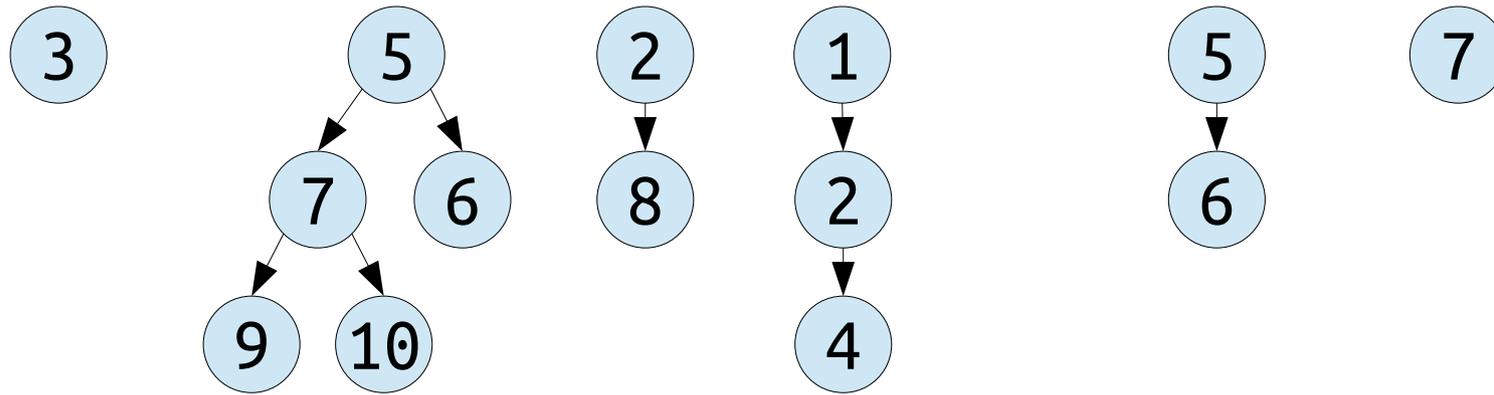



What We Used to Do

Problem: What do we do in an *extract-min*?

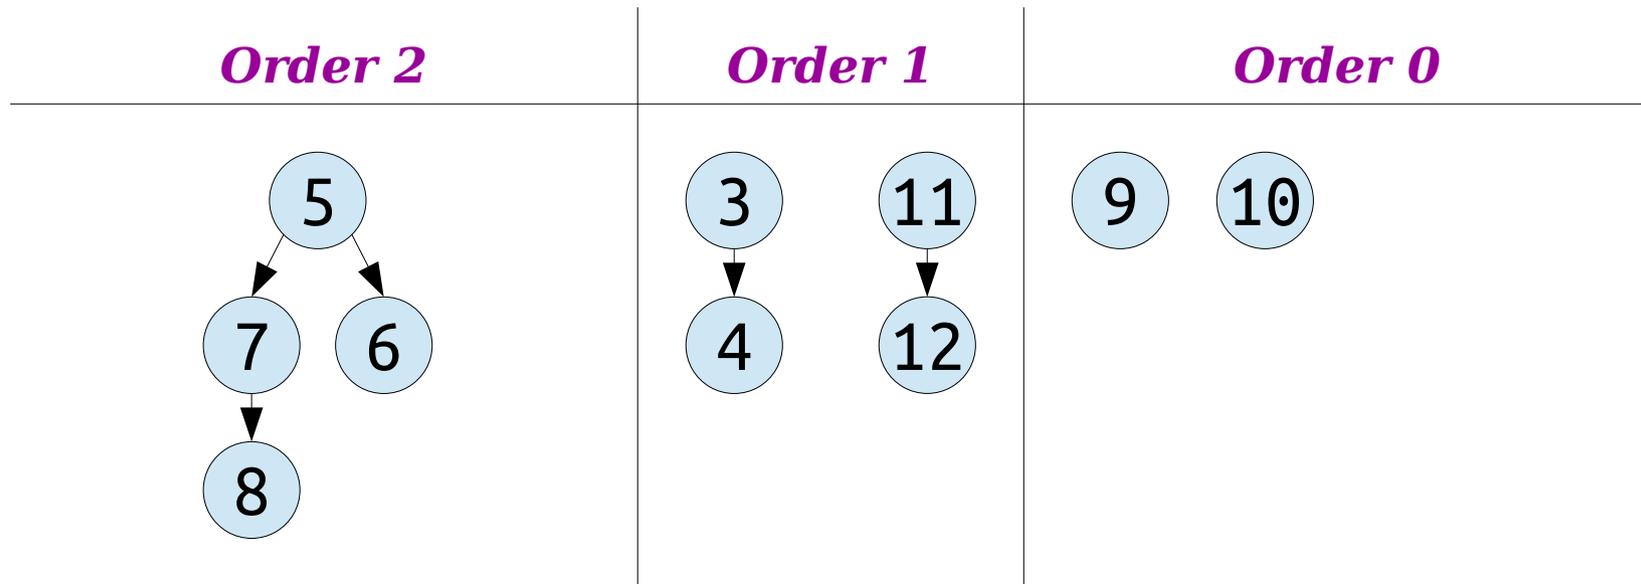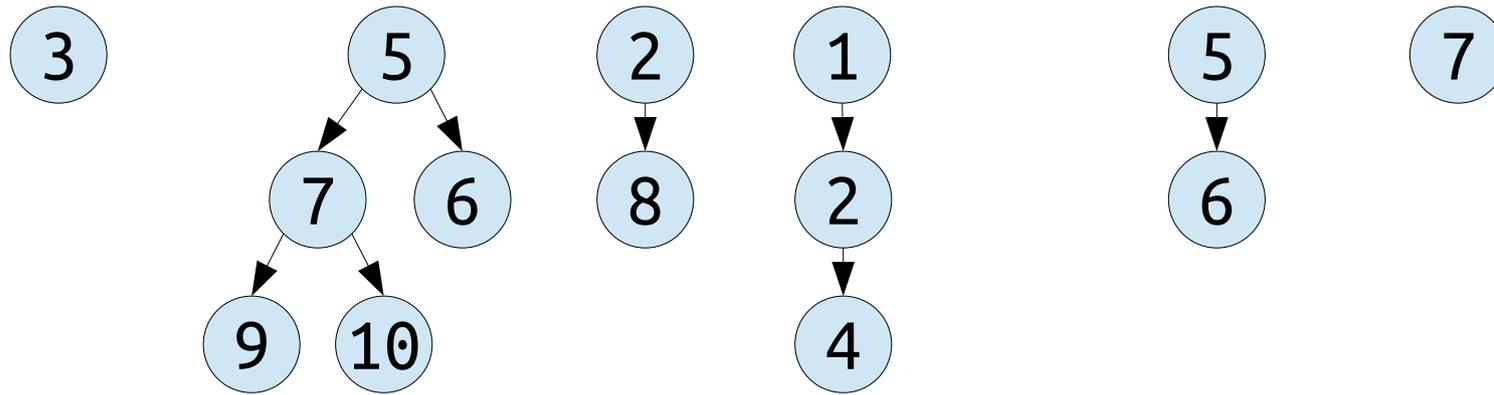



What We Used to Do

Problem: What do we do in an *extract-min*?

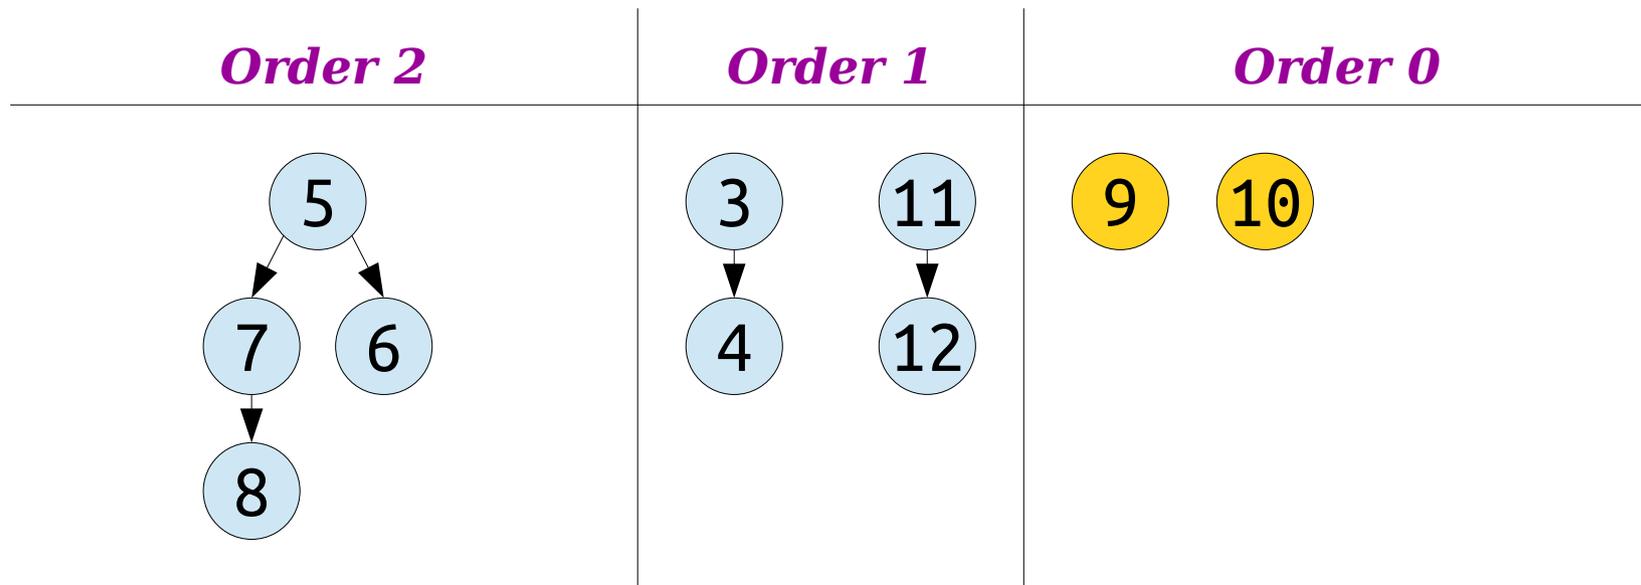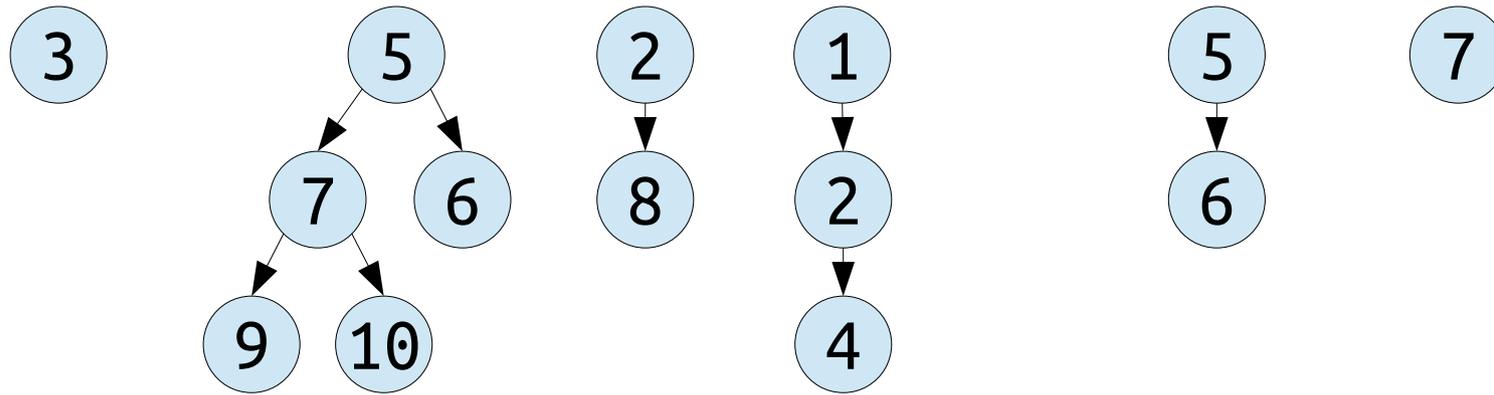



What We Used to Do

Problem: What do we do in an *extract-min*?

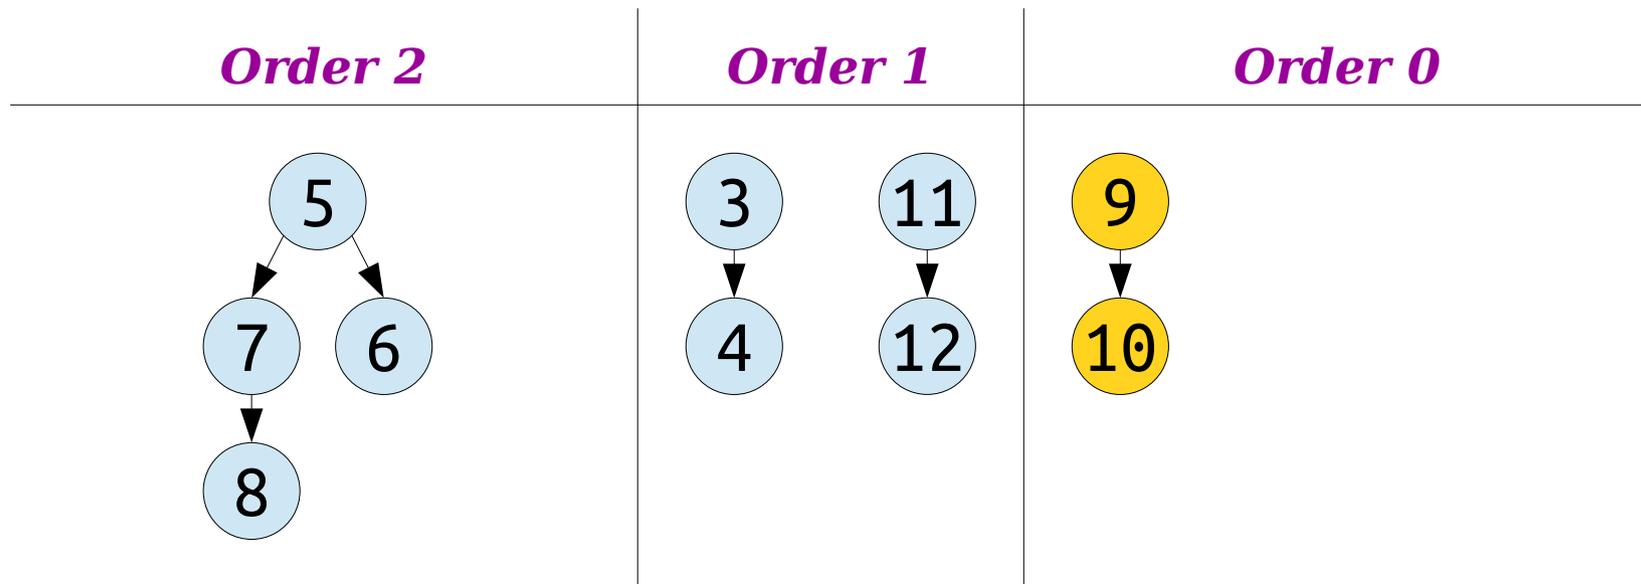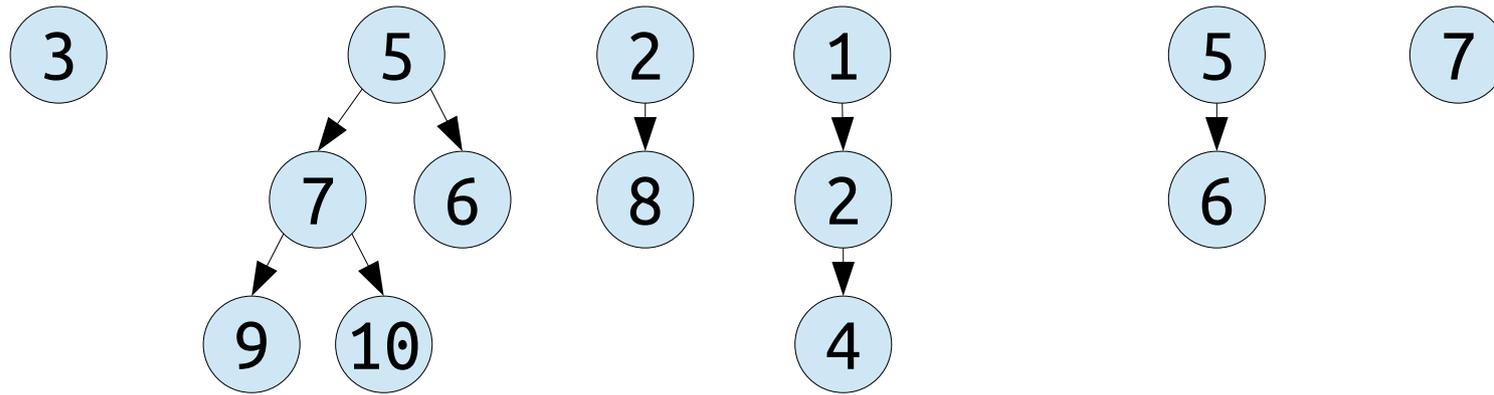



What We Used to Do

Problem: What do we do in an *extract-min*?

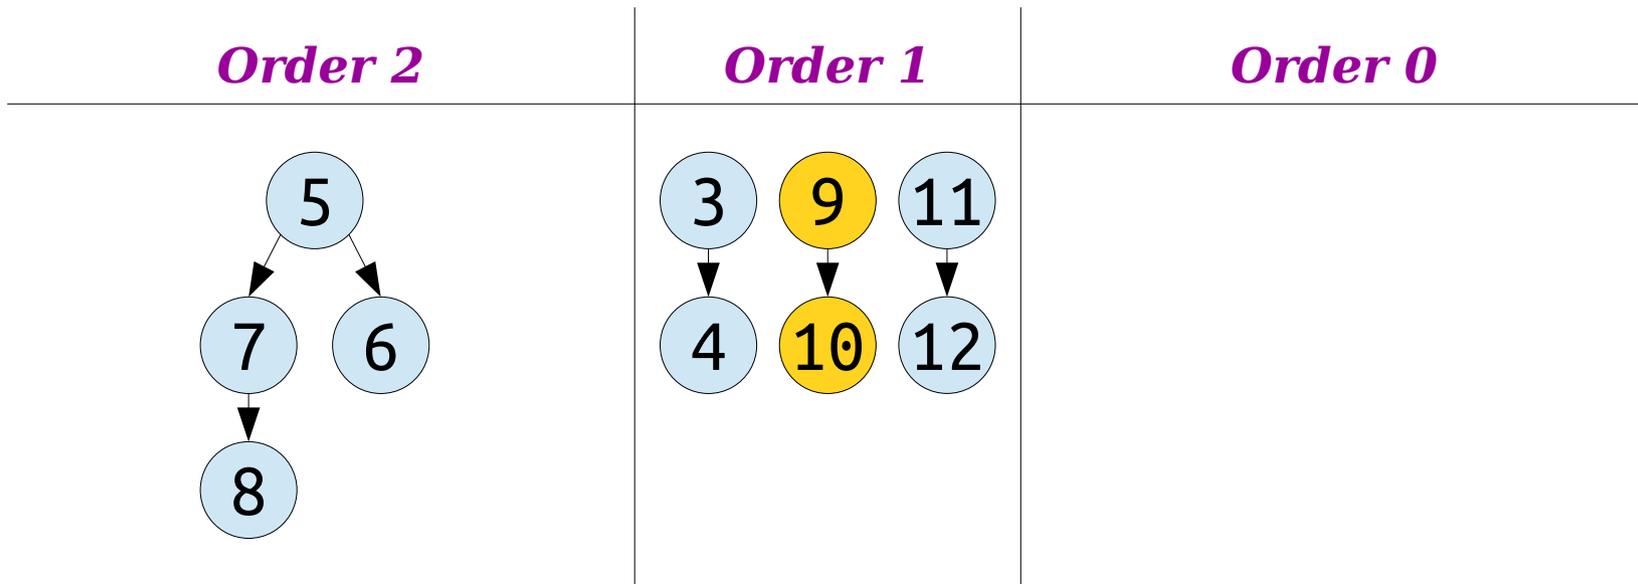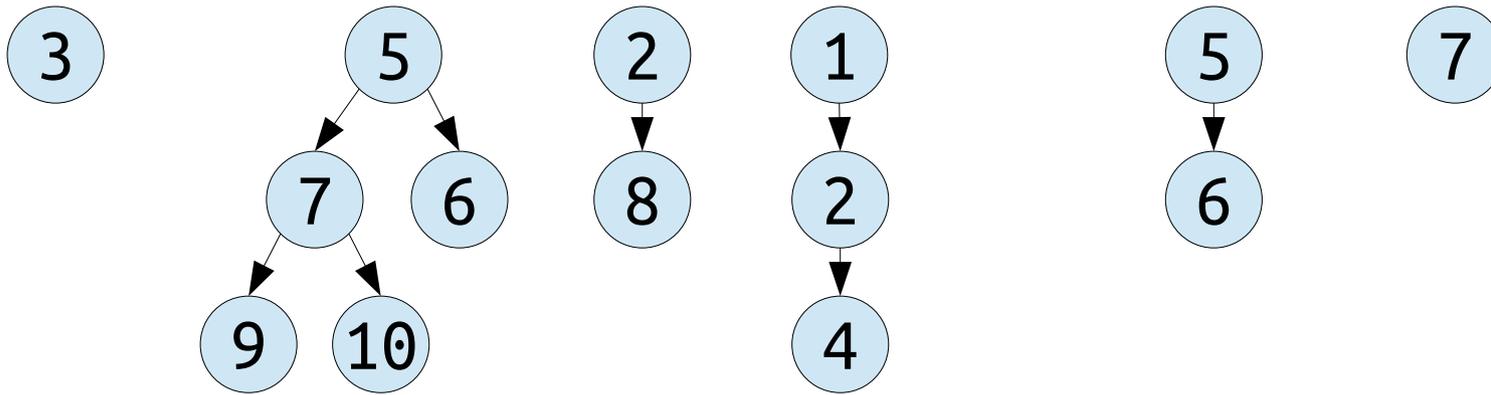



What We Used to Do

Problem: What do we do in an *extract-min*?

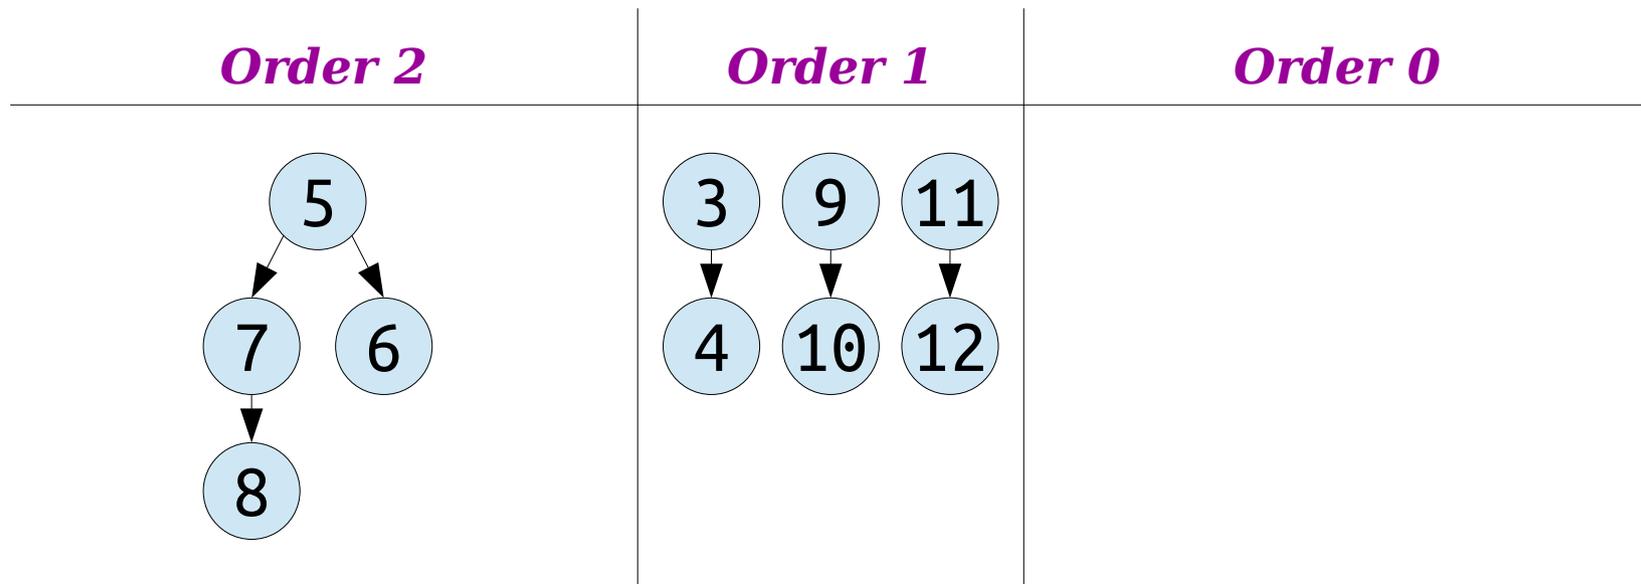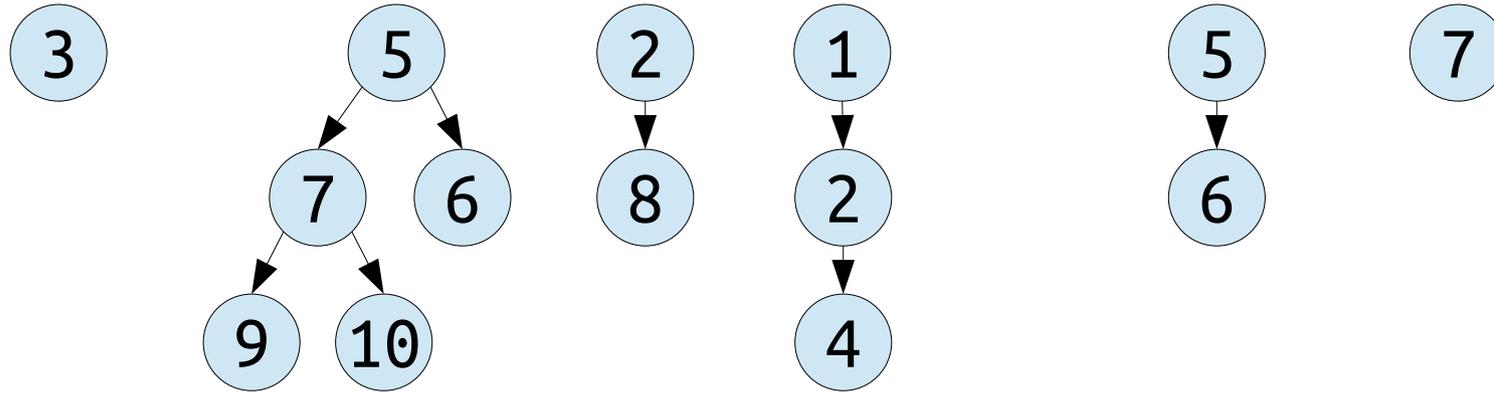



What We Used to Do

Problem: What do we do in an *extract-min*?

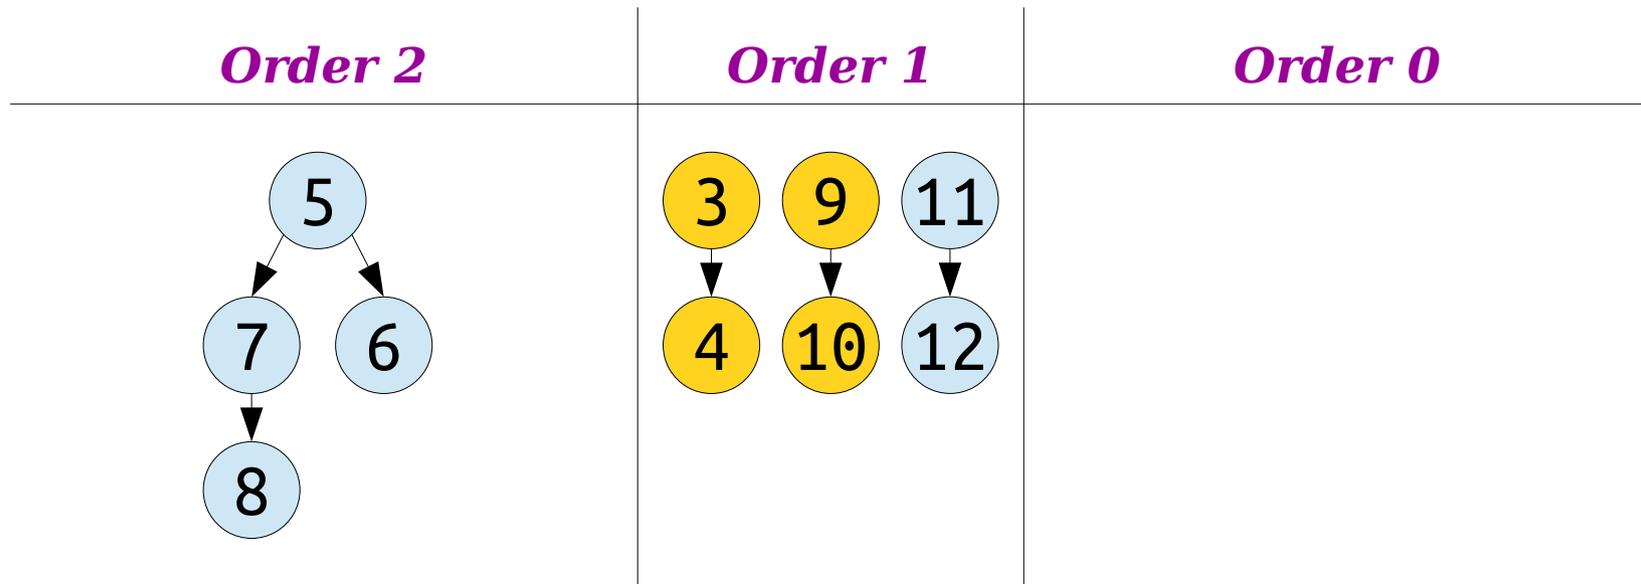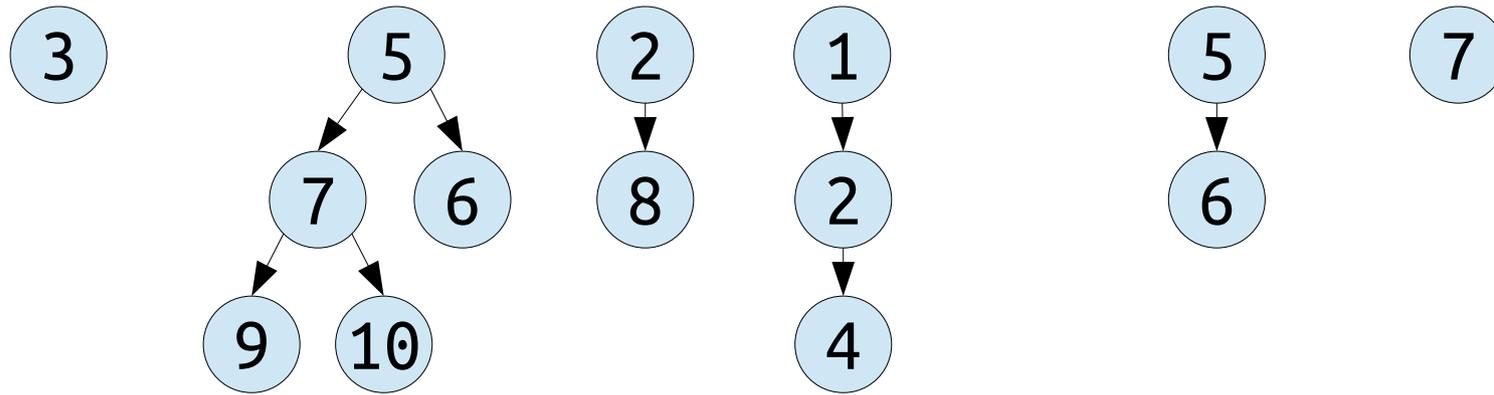



What We Used to Do

Problem: What do we do in an *extract-min*?

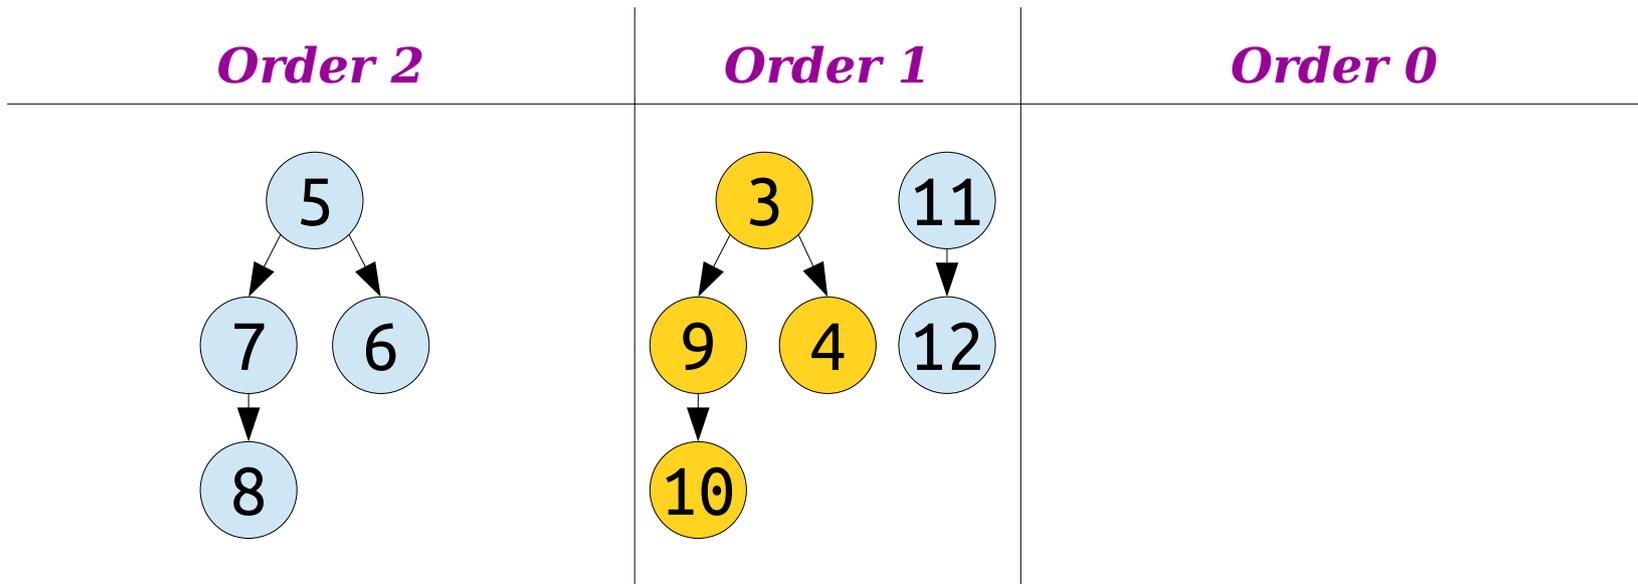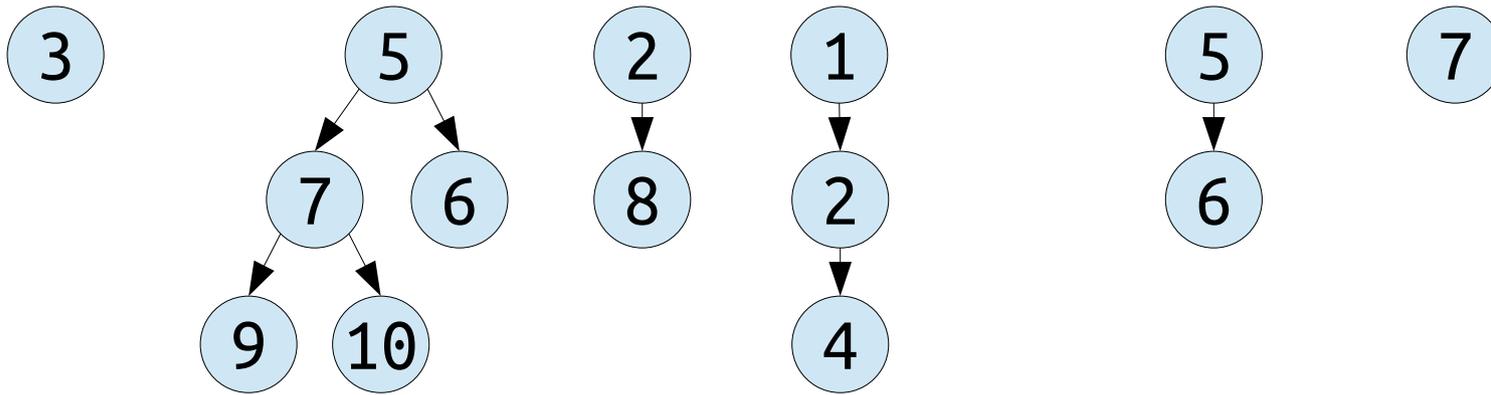



What We Used to Do

Problem: What do we do in an *extract-min*?

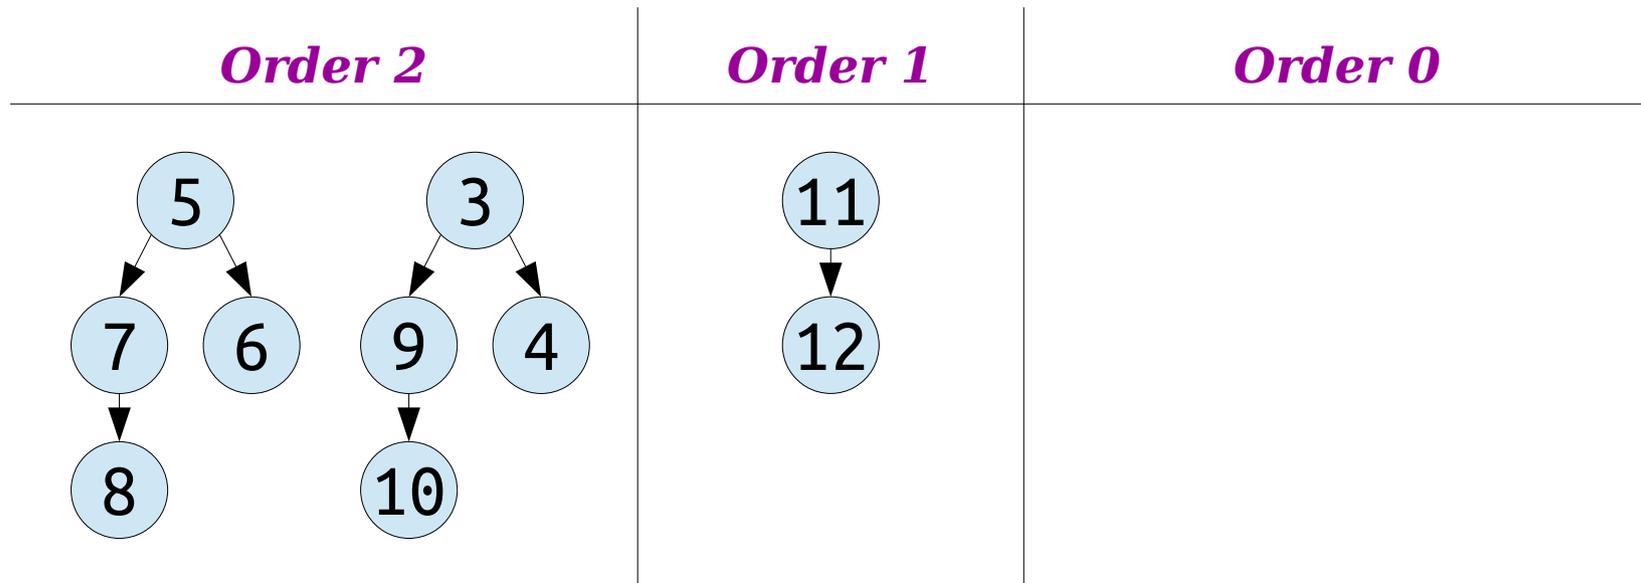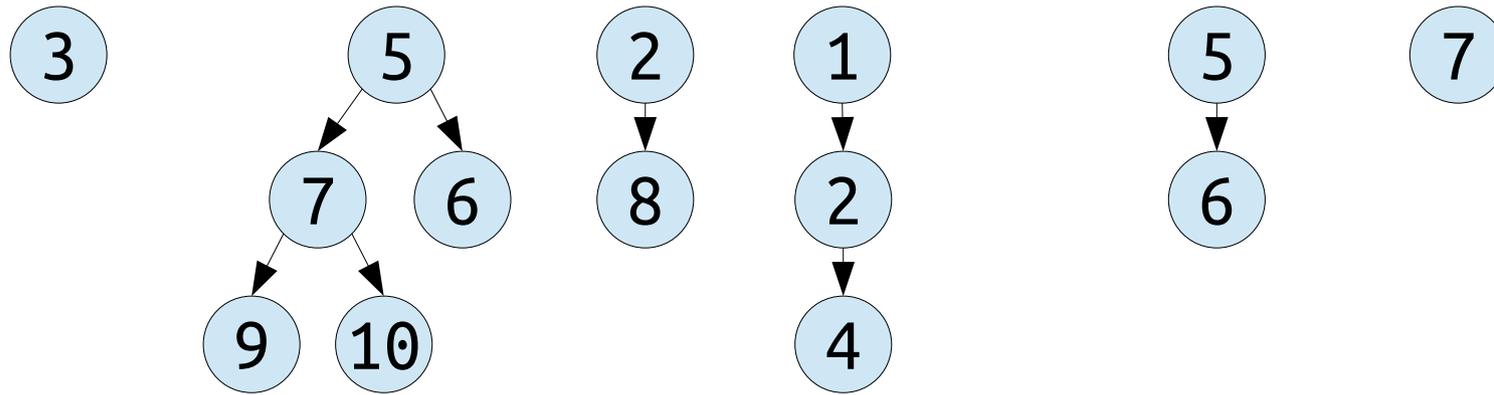



What We Used to Do

Problem: What do we do in an *extract-min*?

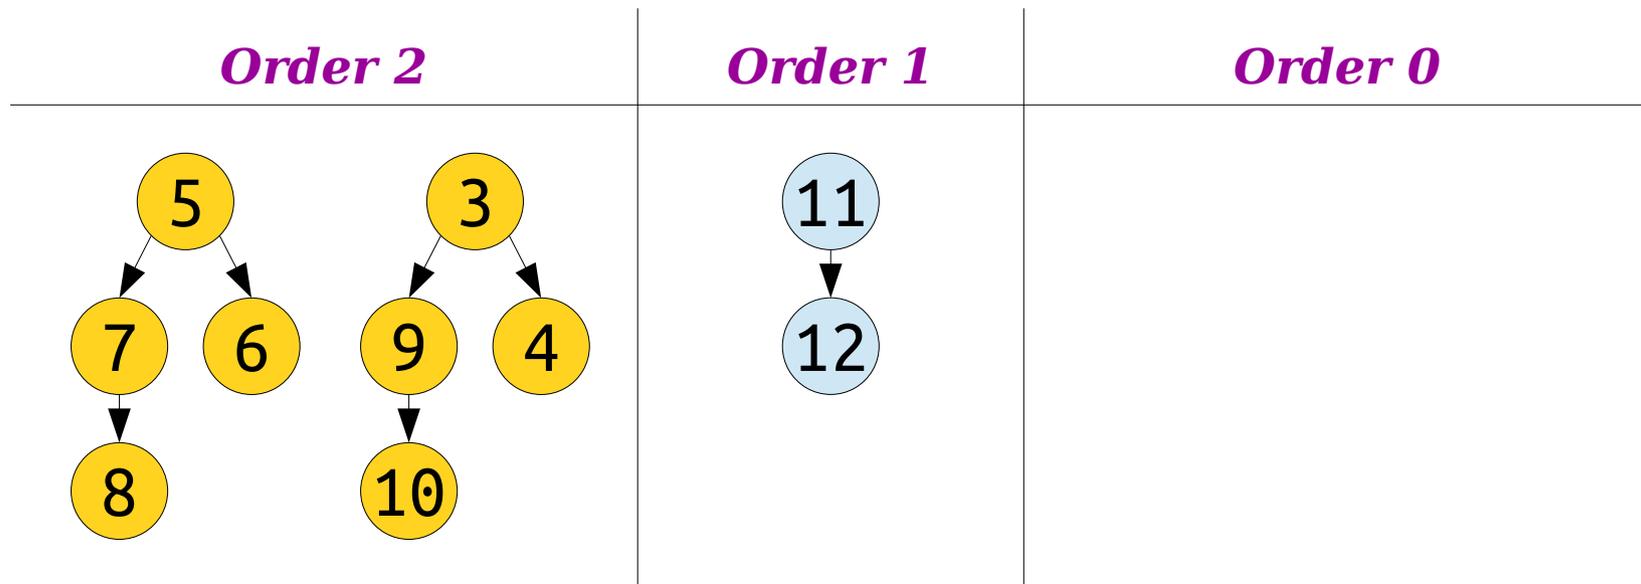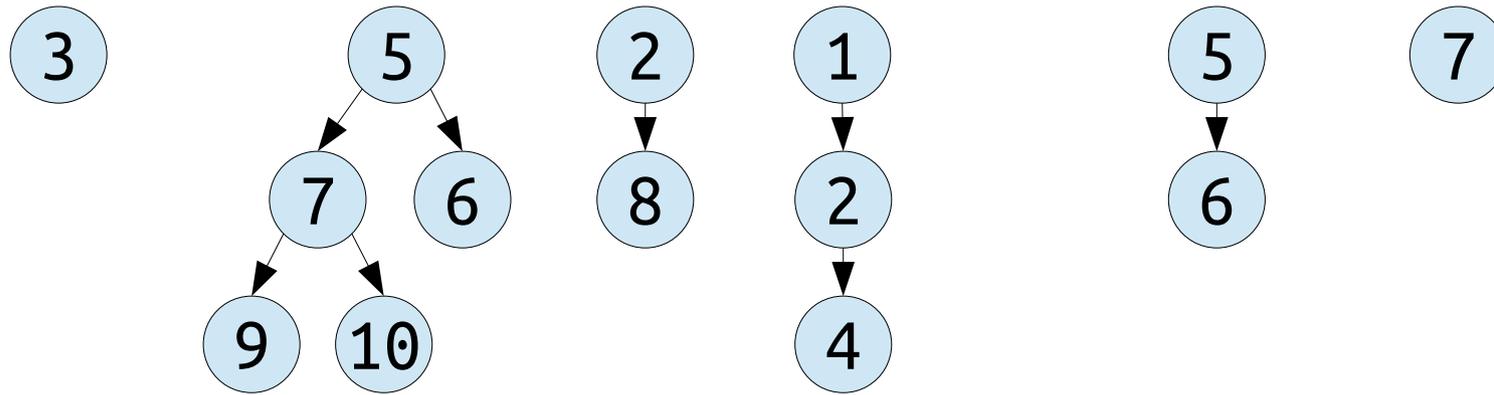



What We Used to Do

Problem: What do we do in an *extract-min*?

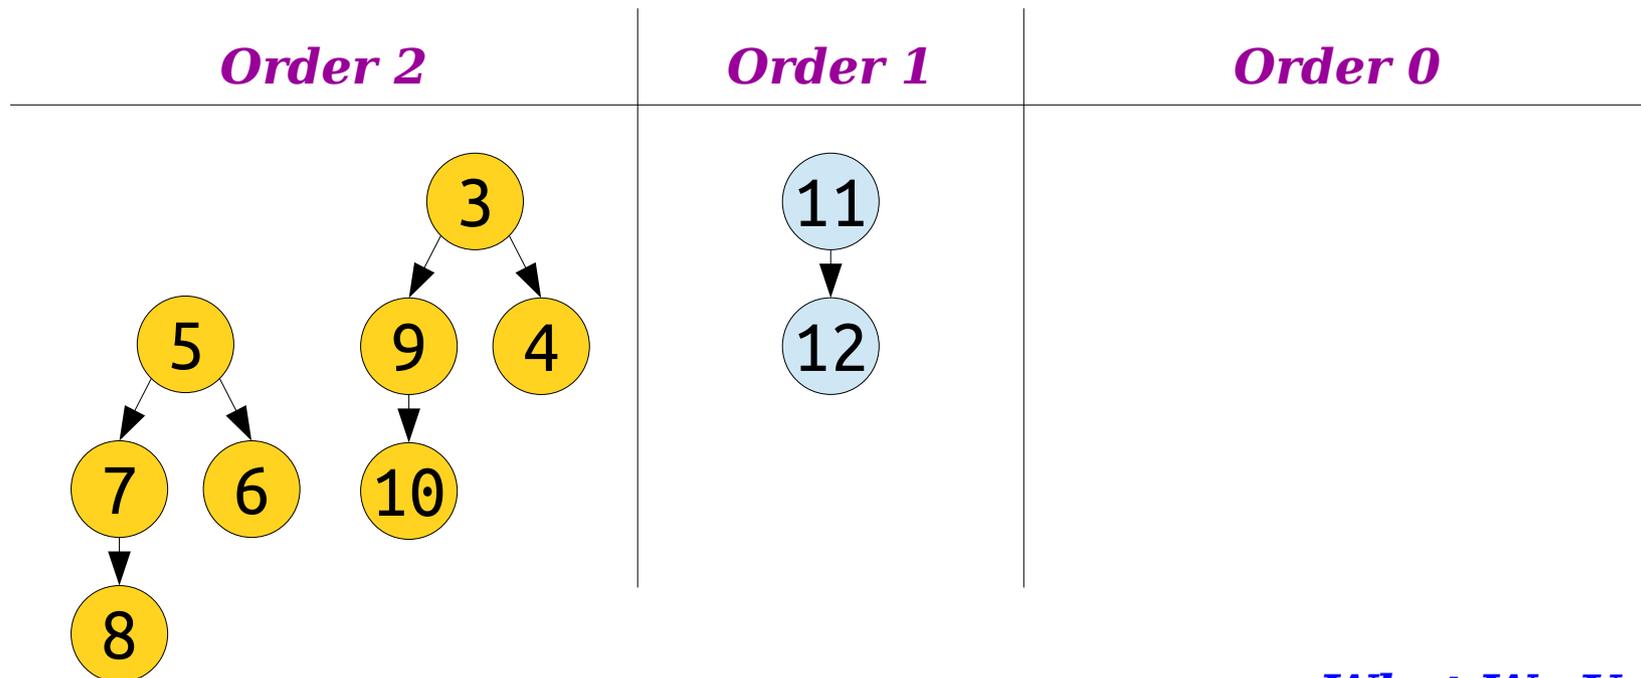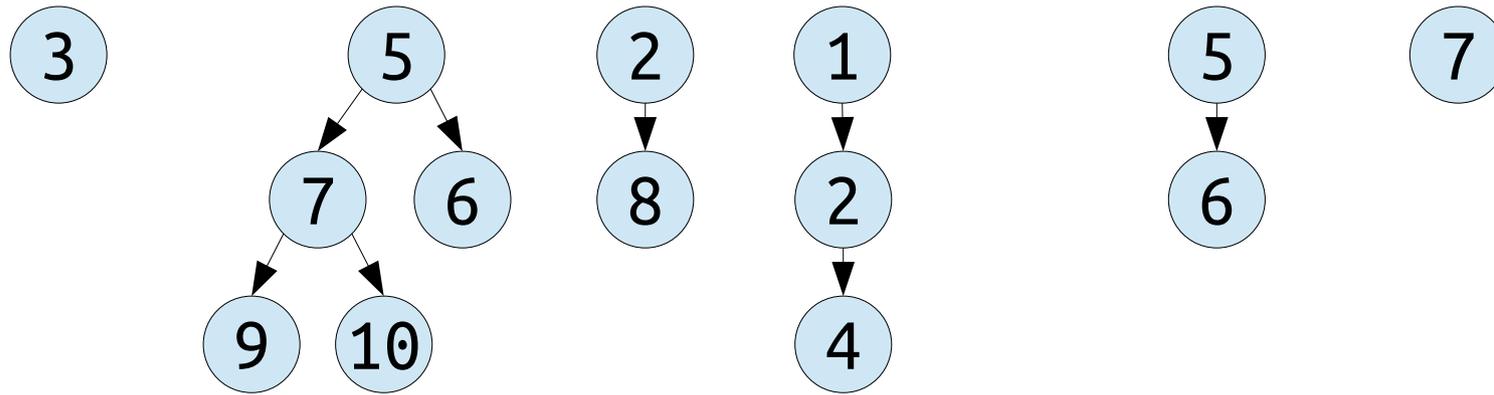




What We Used to Do

Problem: What do we do in an *extract-min*?

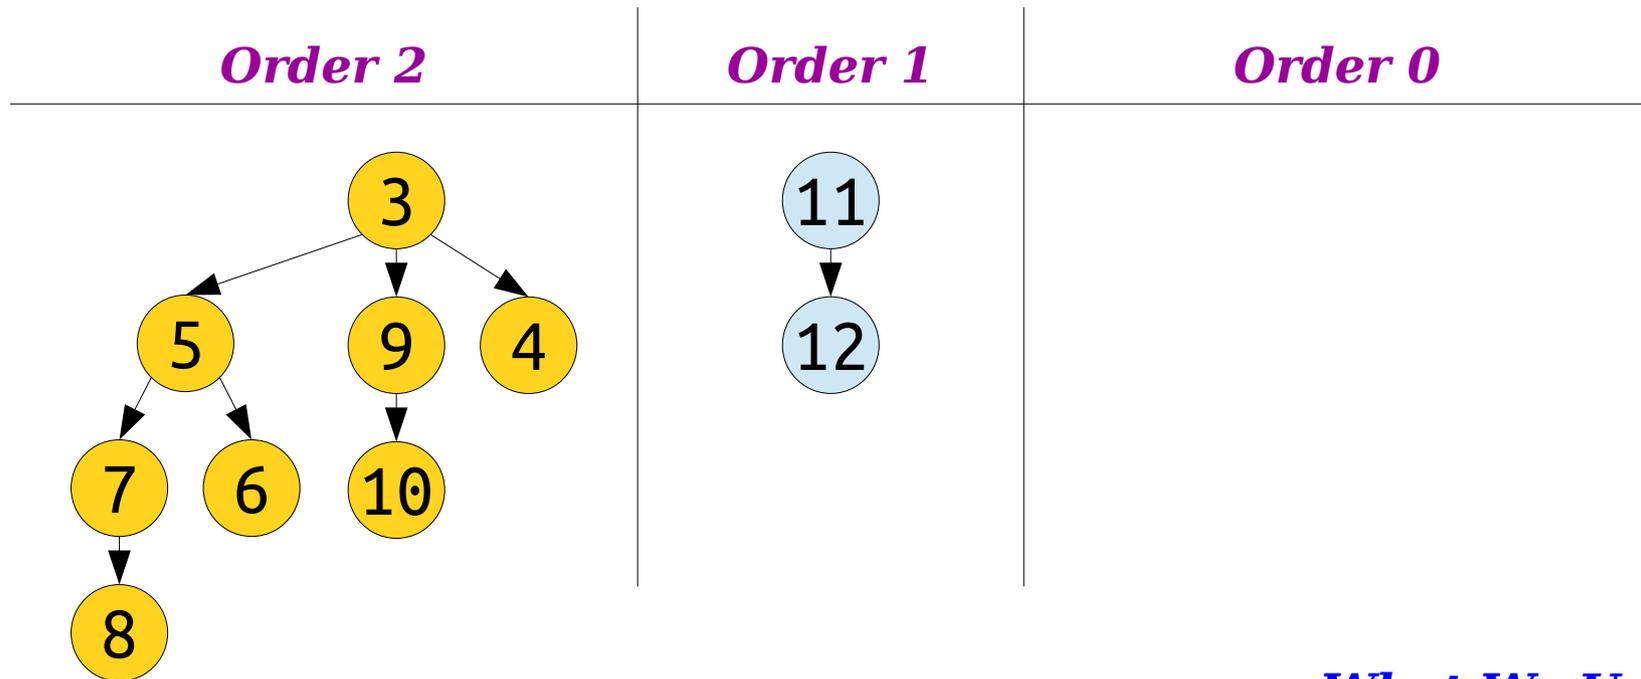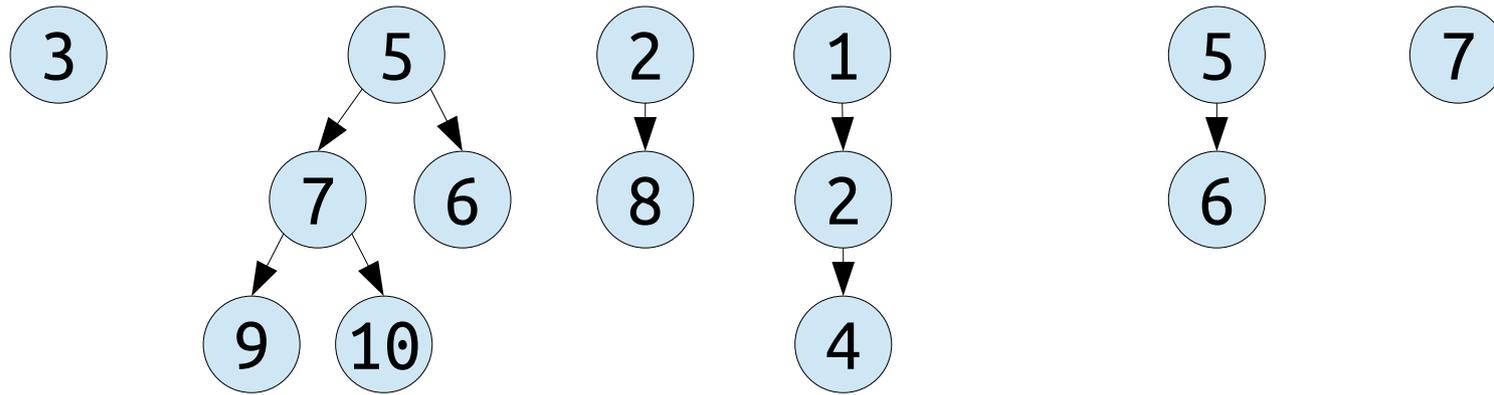

What We Used to Do



Problem: What do we do in an *extract-min*?

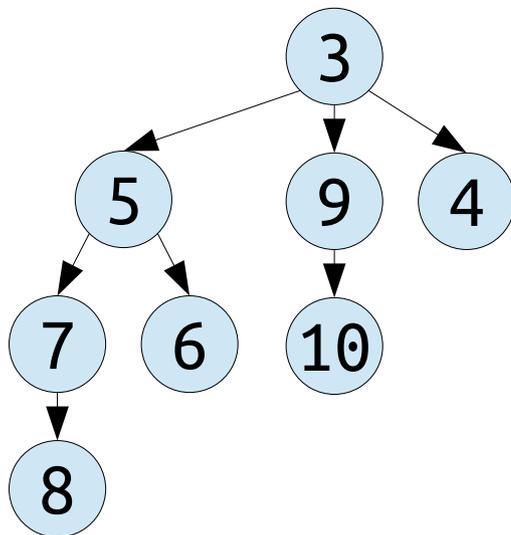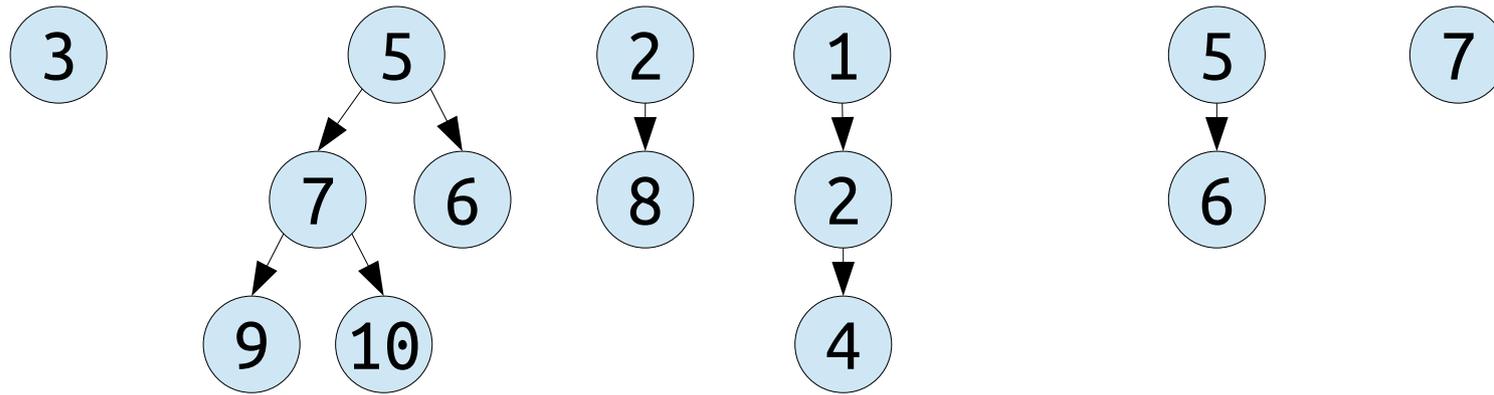

This system assumes we can assign an "order" to each tree. That's easy with binomial trees. That's harder with our new trees. What should we do here?

What We Used to Do






Problem: What do we do in an *extract-min*?

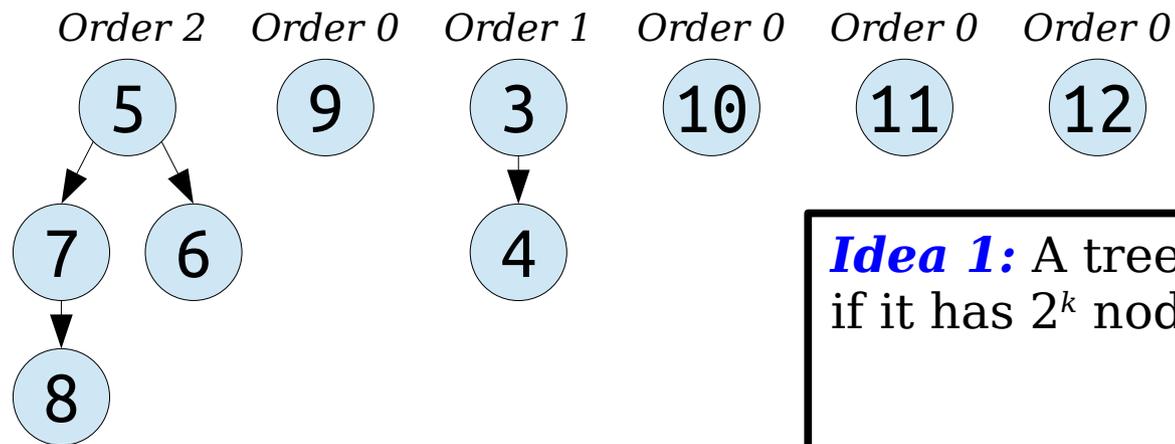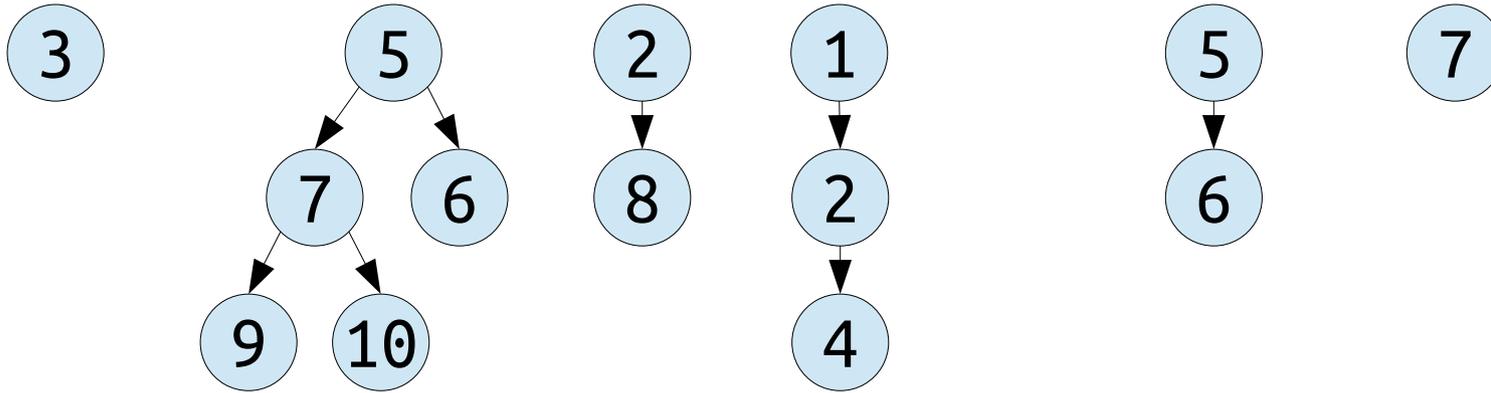

Idea 1: A tree has order k if it has 2^k nodes.

What We Used to Do

Problem: What do we do in an *extract-min*?

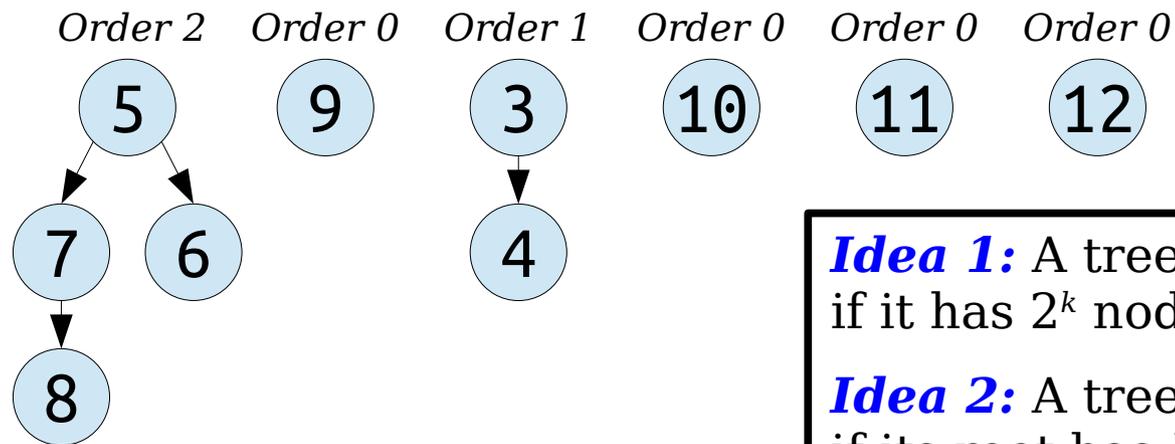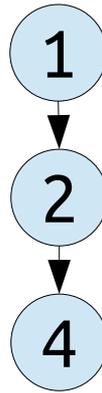
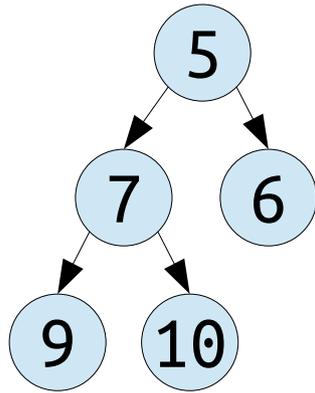


Idea 1: A tree has order k if it has 2^k nodes.

Idea 2: A tree has order k if its root has k children.

What We Used to Do

Problem: What do we do in an *extract-min*?

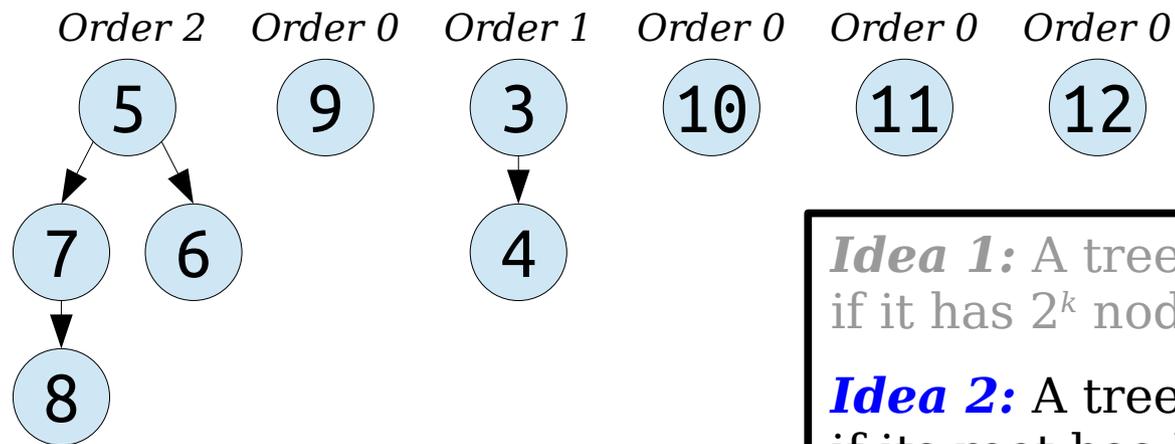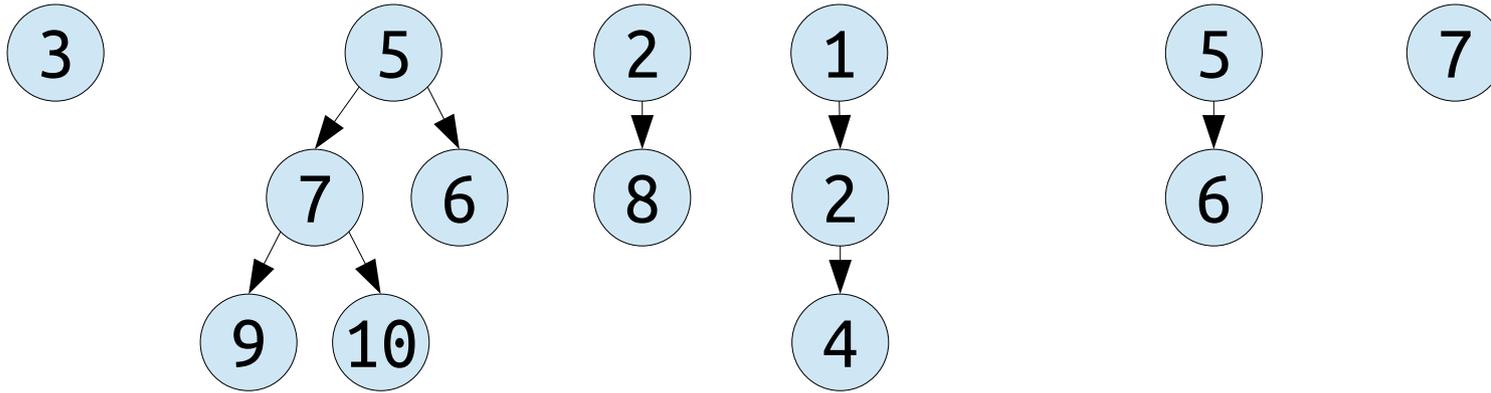

Idea 1: A tree has order k if it has 2^k nodes.

Idea 2: A tree has order k if its root has k children.


What We Used to Do

Problem: What do we do in an *extract-min*?


Order 0




Order 2

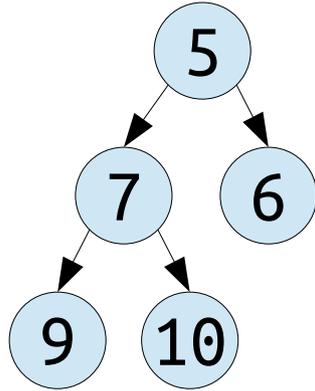


Order 1



Order 1

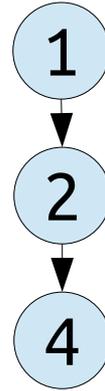


Order 1



Order 0




Order 2

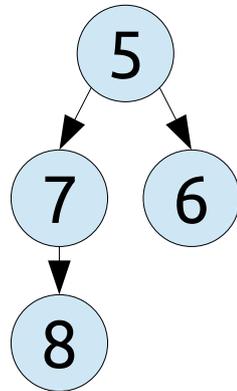

Order 0



Order 1



Order 0



Order 0



Order 0




Idea 1: A tree has order k if it has 2^k nodes.

Idea 2: A tree has order k if its root has k children.

What We Used to Do


Problem: What do we do in an **extract-min**?

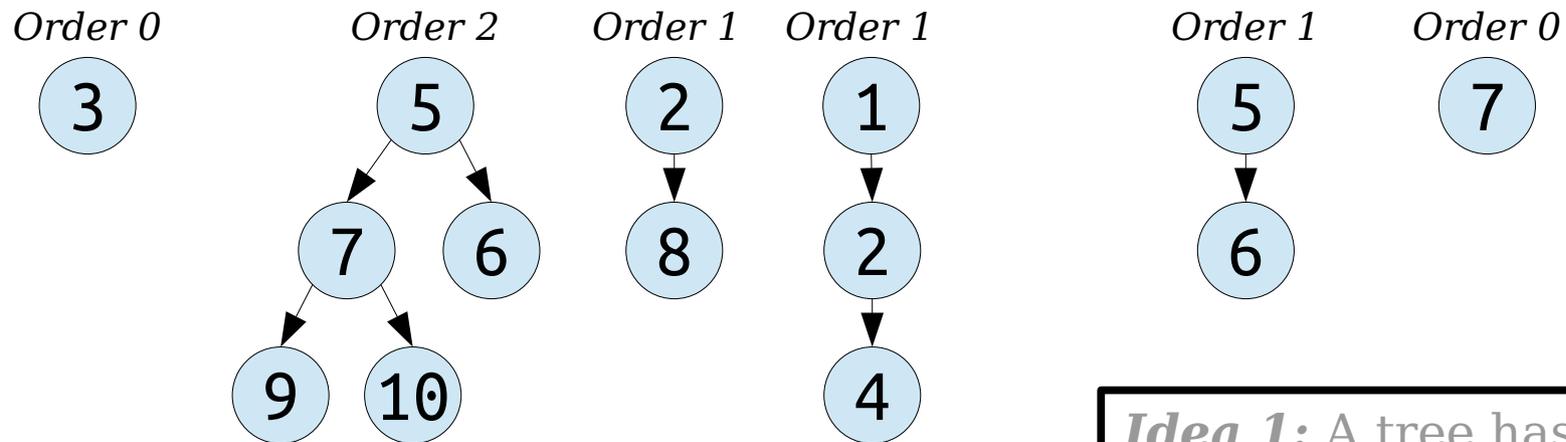


Idea 1: A tree has order k if it has 2^k nodes.

Idea 2: A tree has order k if its root has k children.


Problem: What do we do in an *extract-min*?

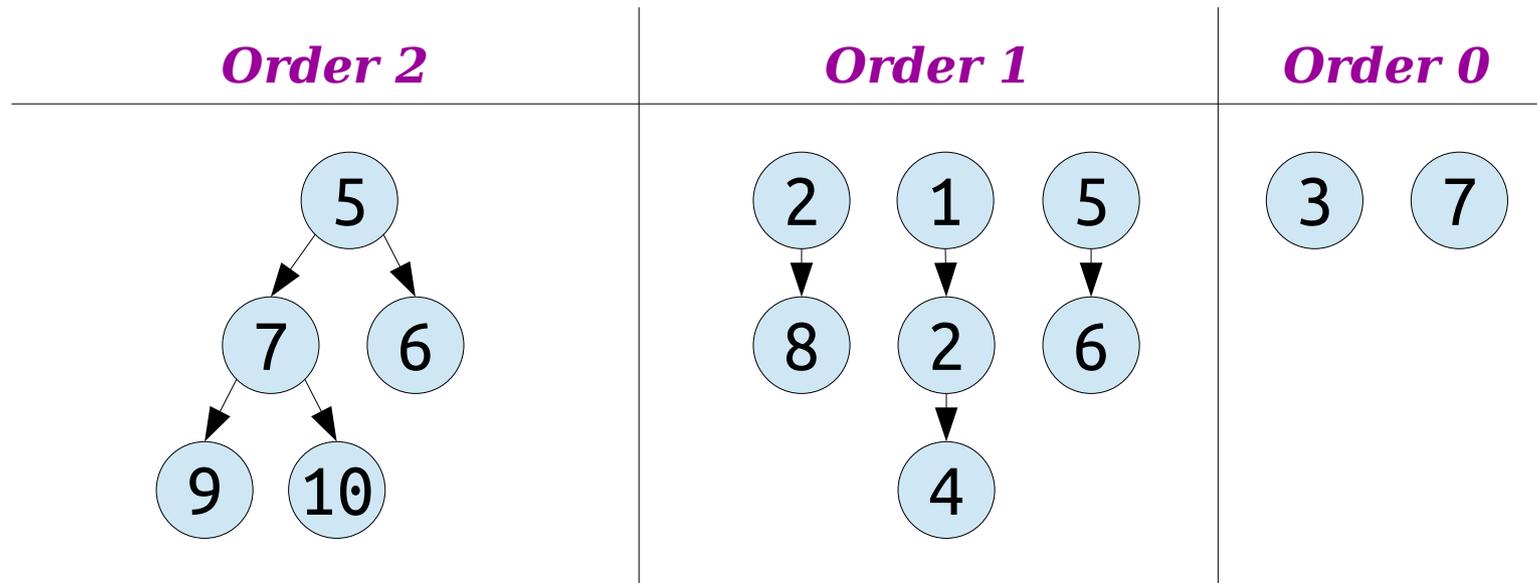


Problem: What do we do in an *extract-min*?

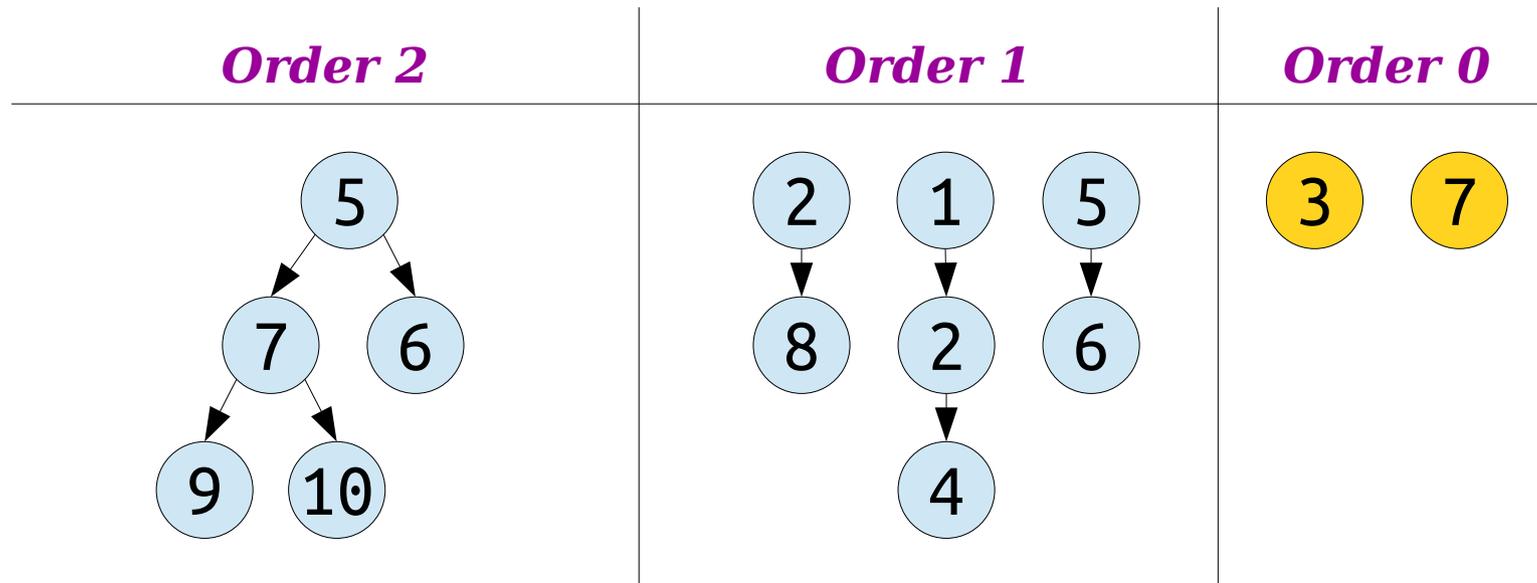


Problem: What do we do in an *extract-min*?

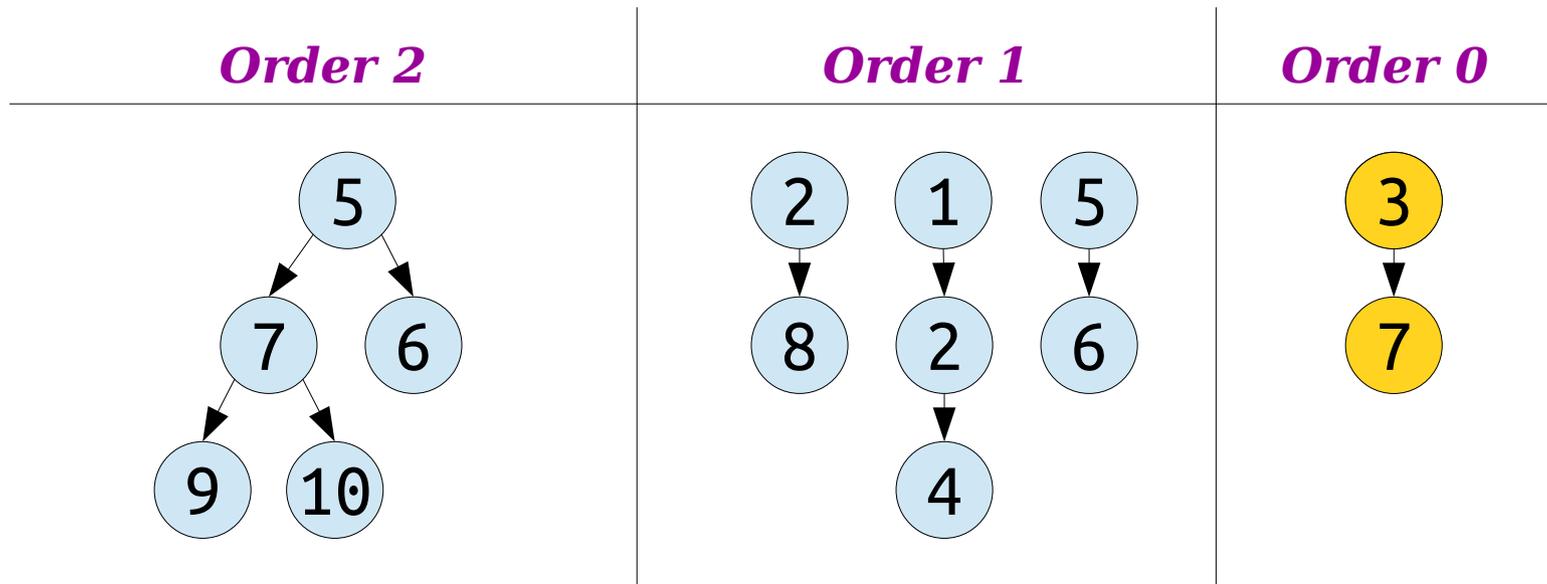


Problem: What do we do in an *extract-min*?

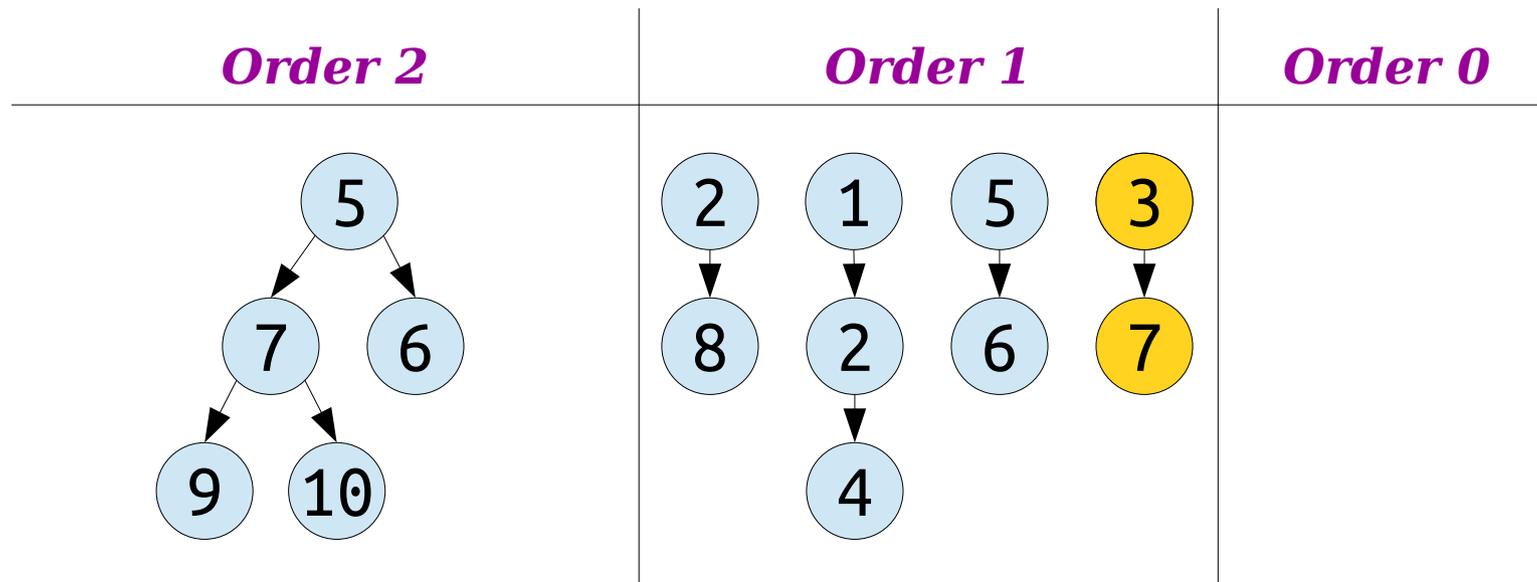

Problem: What do we do in an *extract-min*?

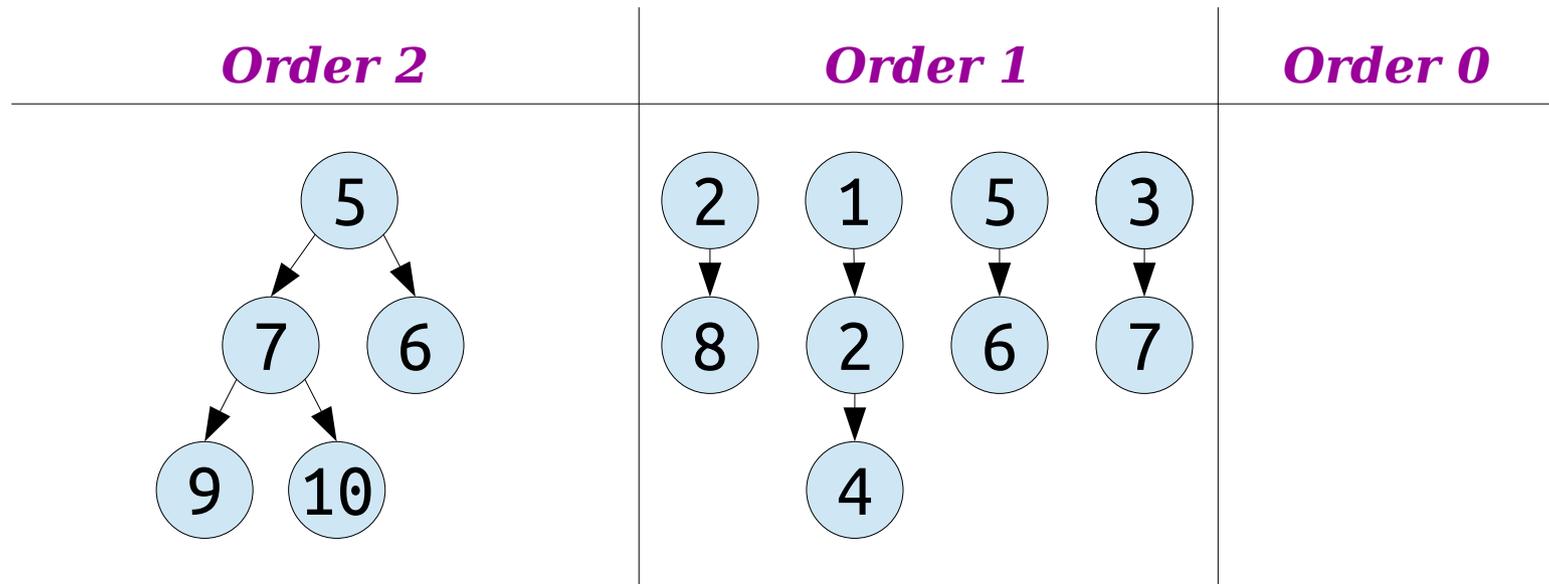


Problem: What do we do in an *extract-min*?

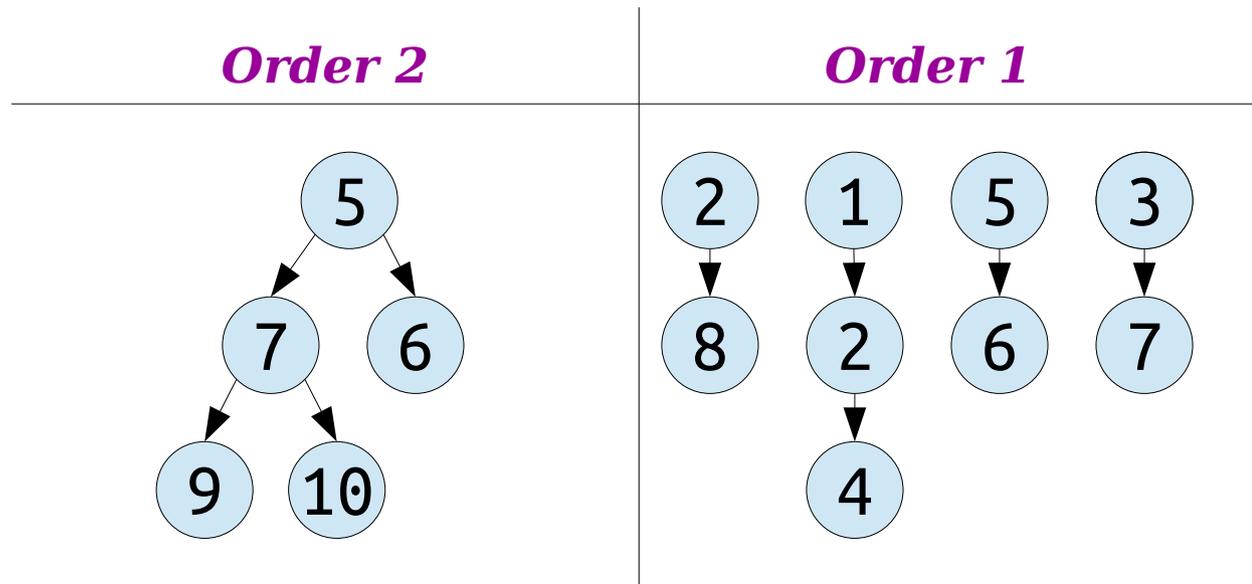


Problem: What do we do in an *extract-min*?

Order 2

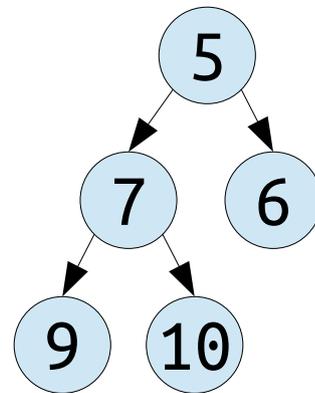


Order 1

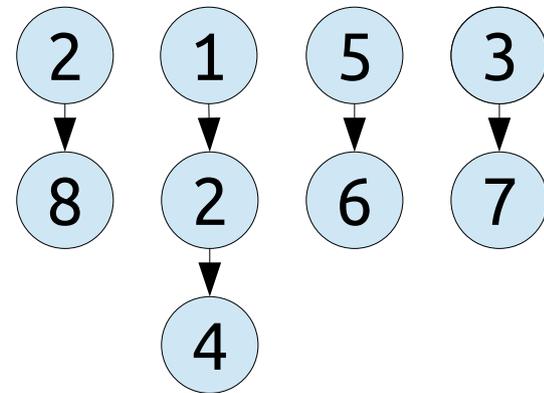


Problem: What do we do in an *extract-min*?

Order 2

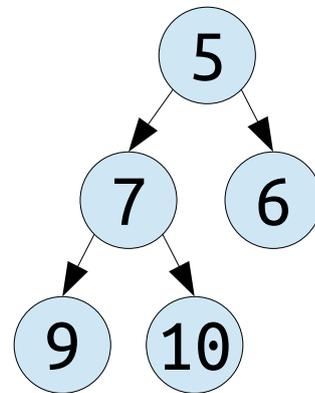


Order 1

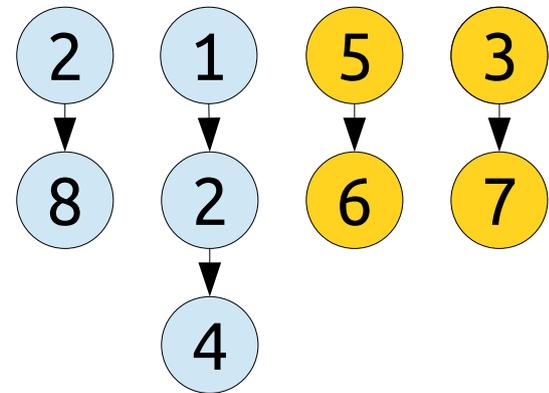


Problem: What do we do in an *extract-min*?

Order 2

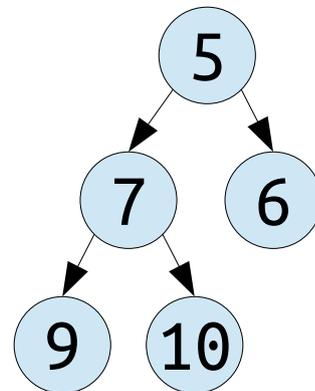


Order 1

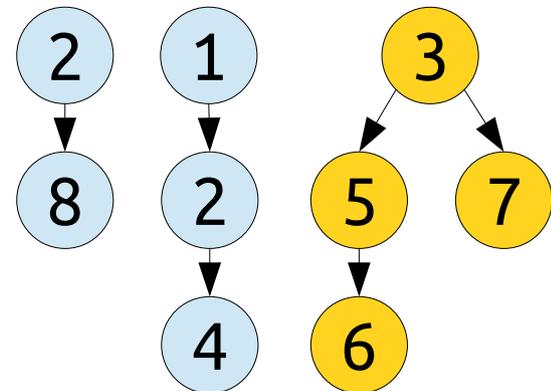


Problem: What do we do in an *extract-min*?

Order 2

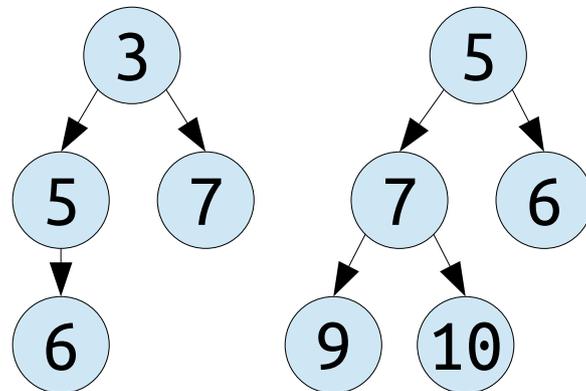


Order 1

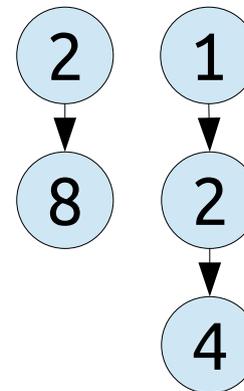


Problem: What do we do in an *extract-min*?

Order 2

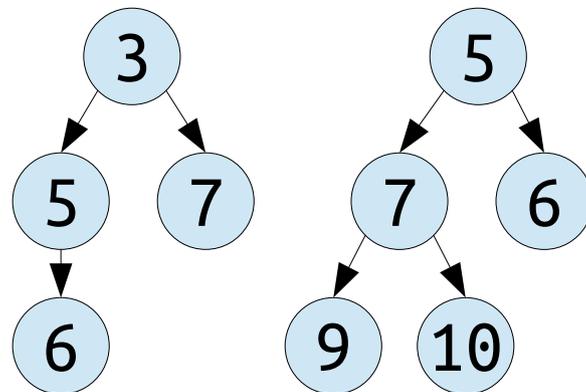


Order 1

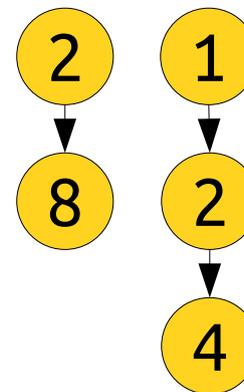


Problem: What do we do in an *extract-min*?

Order 2

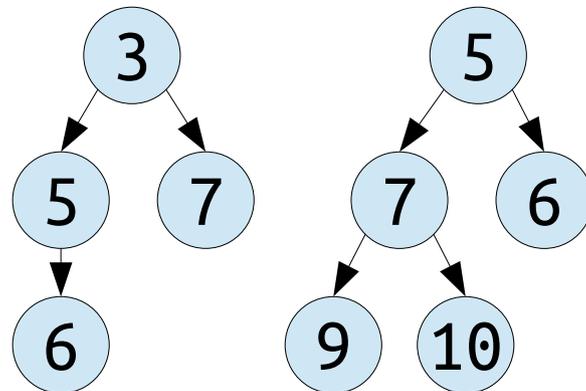


Order 1

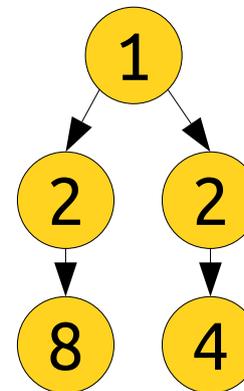

Problem: What do we do in an *extract-min*?


Order 2

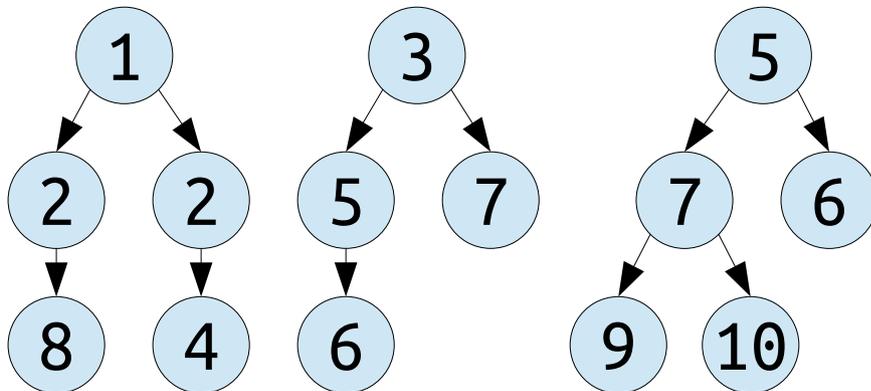

Order 1

Problem: What do we do in an *extract-min*?


Order 2

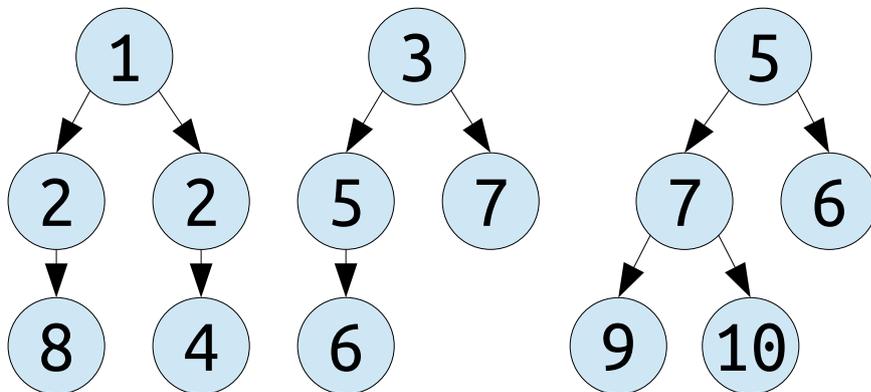

Problem: What do we do in an *extract-min*?

Order 3


Order 2

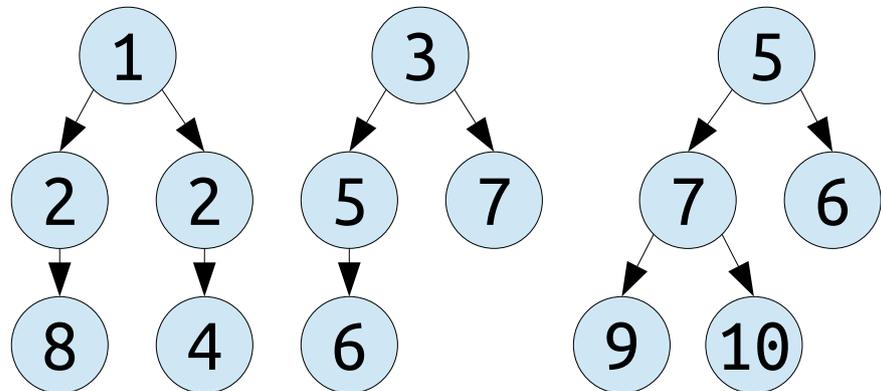

Problem: What do we do in an *extract-min*?

Order 3


Order 2

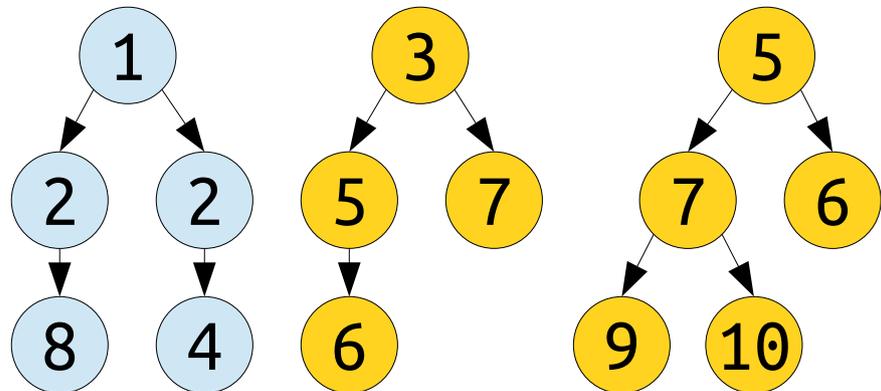

Problem: What do we do in an *extract-min*?


Order 3

Order 2

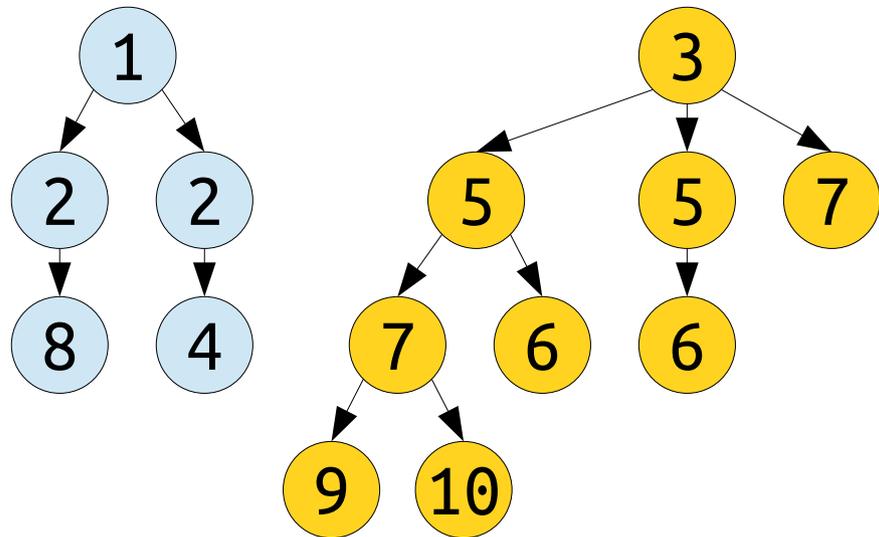


Problem: What do we do in an *extract-min*?

Order 3

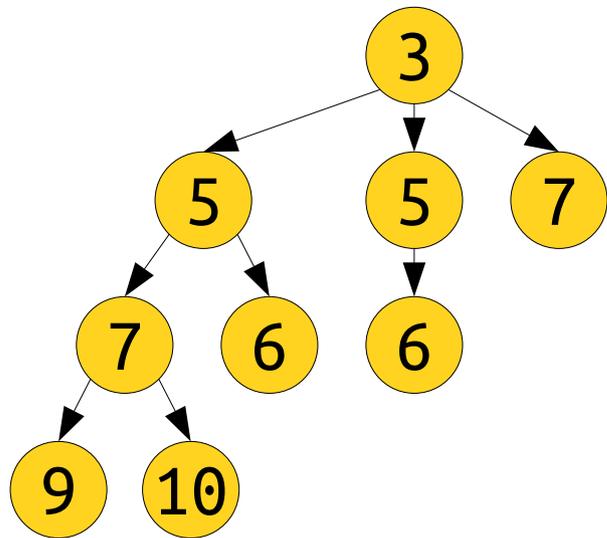


Order 2

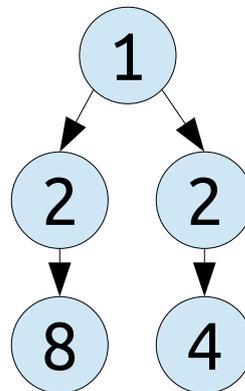


Problem: What do we do in an *extract-min*?


Order 3

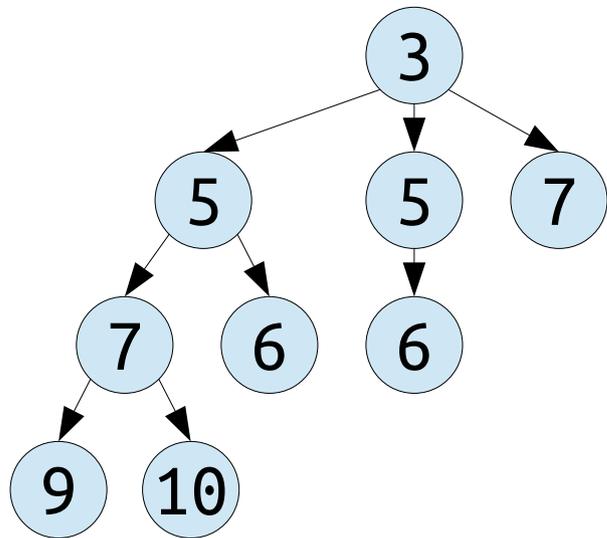


Order 2

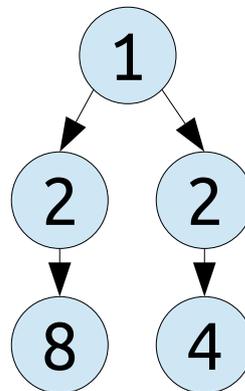

Problem: What do we do in an *extract-min*?

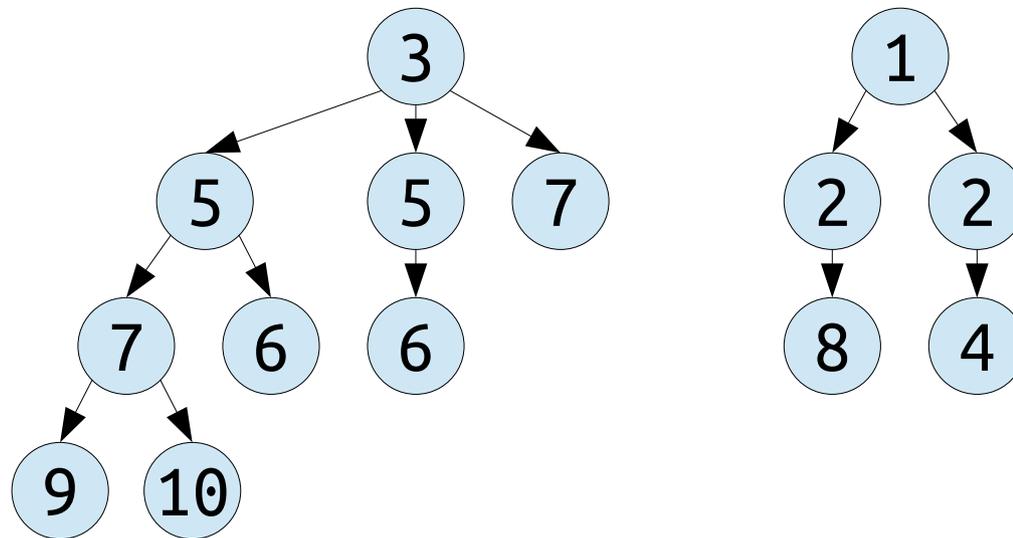


Problem: What do we do in an *extract-min*?

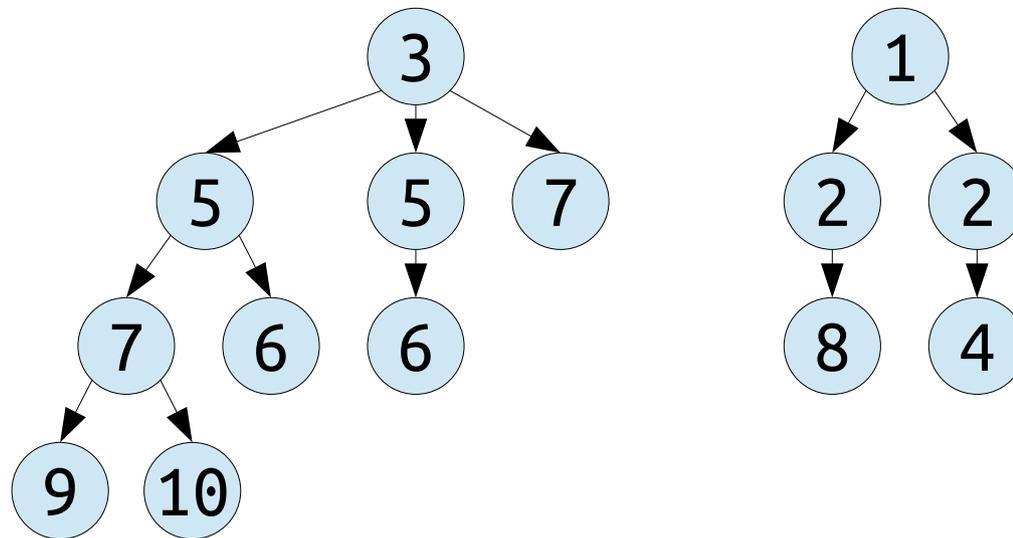


-
- (1) To do a **decrease-key**, cut the node from its parent.
 - (2) Do **extract-min** as usual, using child count as order.

Question: How efficient is this?

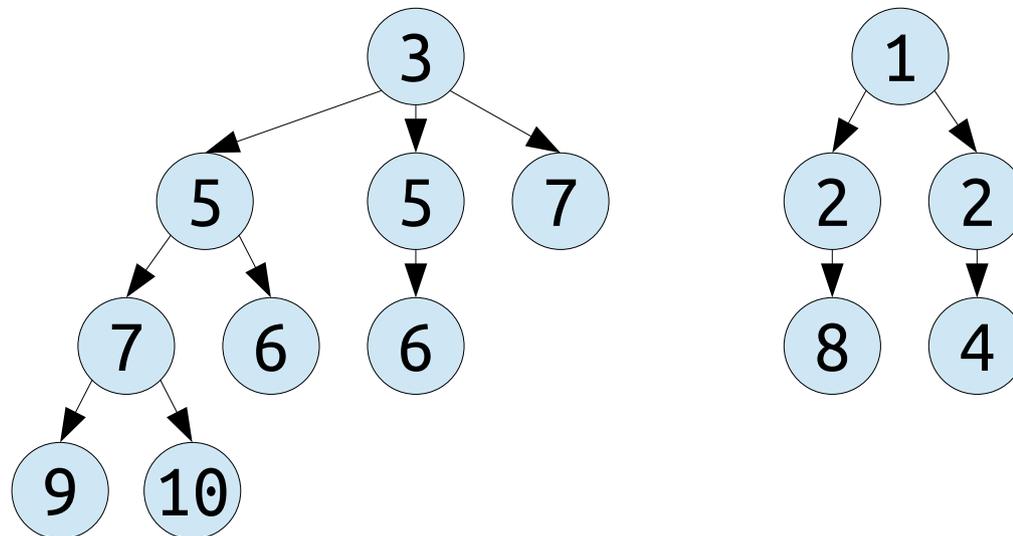


- (1) To do a **decrease-key**, cut the node from its parent.
- (2) Do **extract-min** as usual, using child count as order.

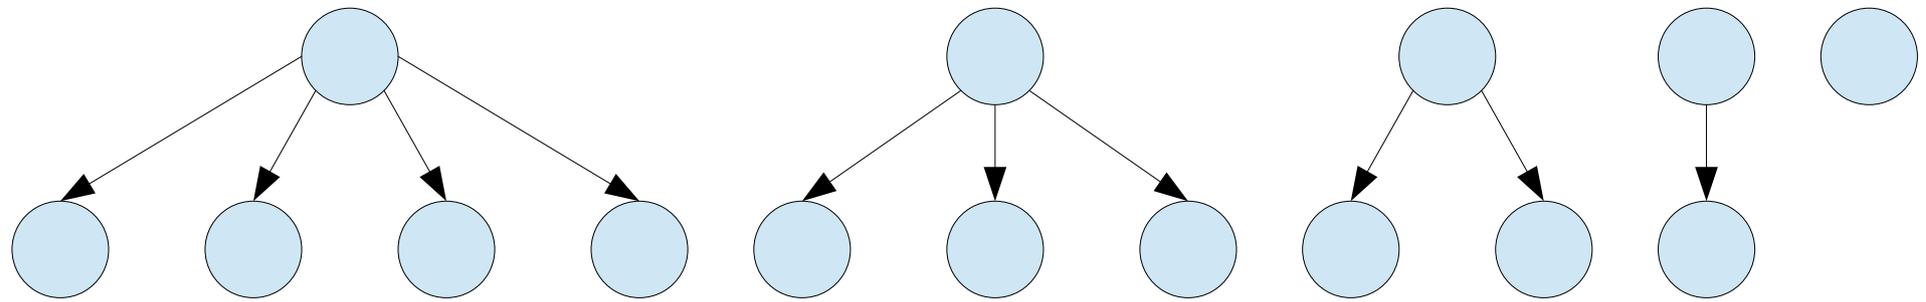

Claim: Our trees can end up with very unusual shapes.

Intuition: *extract-min*
is only fast if it
compacts nodes into a
few trees.

There are $\Theta(n^{1/2})$ trees here.
Why?

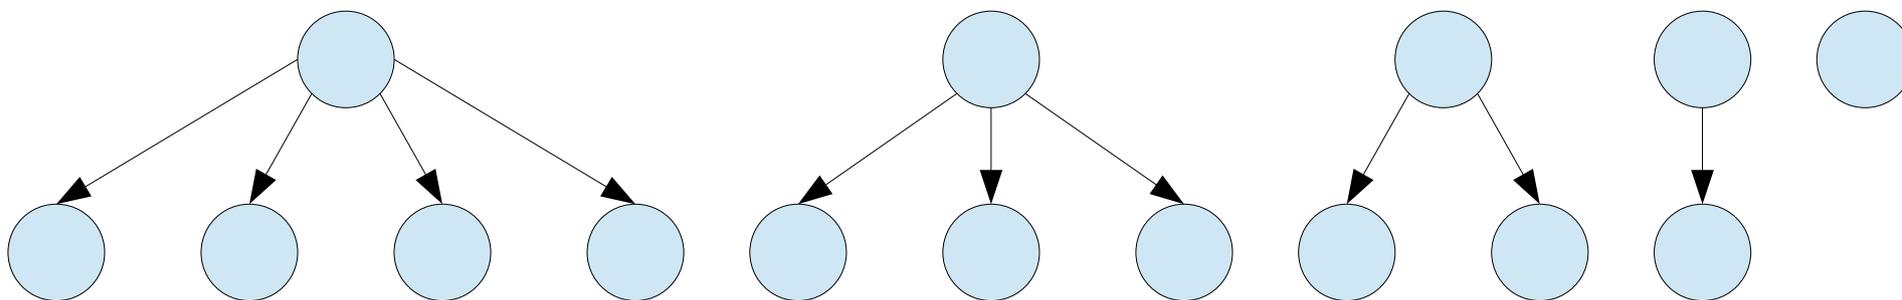


Answer at

<https://cs166.stanford.edu/pollev>

Claim: Because tree shapes aren't well-constrained, we
can force *extract-min* to take amortized time $\Omega(n^{1/2})$.

Intuition: *extract-min*
is only fast if it
compacts nodes into a
few trees.


There are $\Theta(n^{1/2})$ trees here.
What happens if we repeatedly
enqueue and ***extract-min*** a
small value?

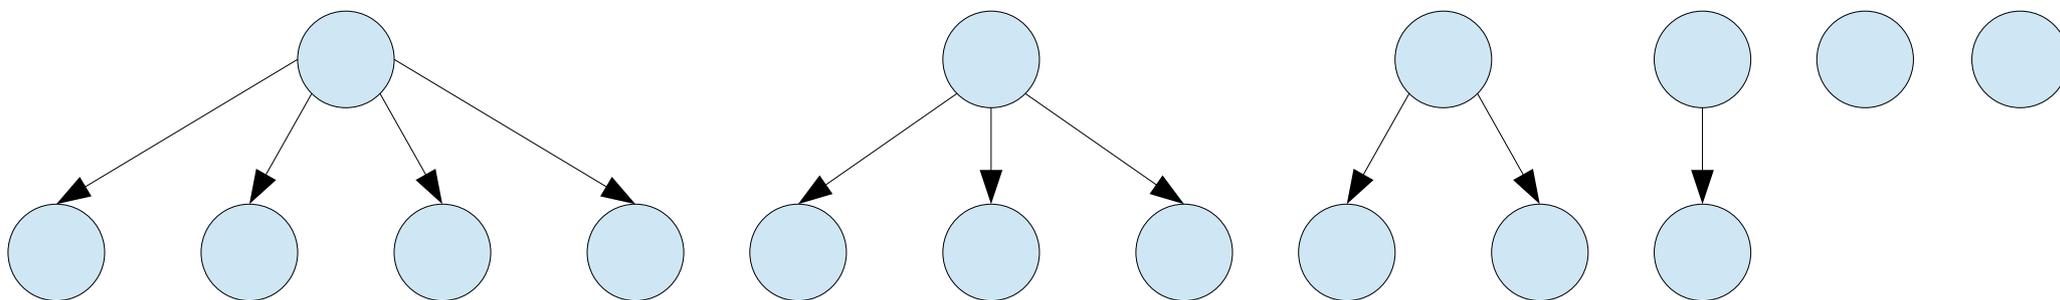

Claim: Because tree shapes aren't well-constrained, we
can force ***extract-min*** to take amortized time $\Omega(n^{1/2})$.

Intuition: *extract-min*
is only fast if it
compacts nodes into a
few trees.

There are $\Theta(n^{1/2})$ trees here.
What happens if we repeatedly
enqueue and ***extract-min*** a
small value?

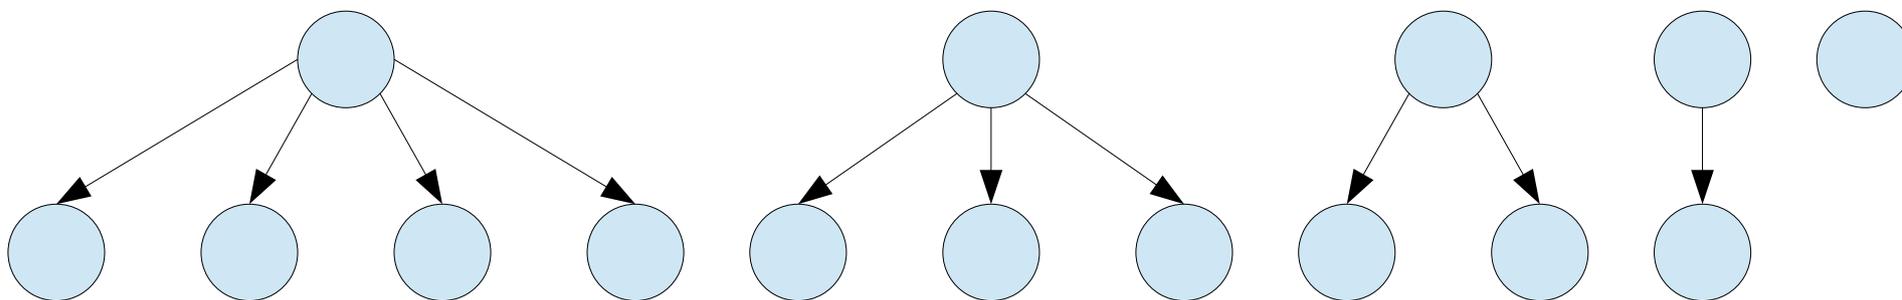


*(Do a bunch of work to compact the trees,
which doesn't accomplish anything.)*

Claim: Because tree shapes aren't well-constrained, we
can force ***extract-min*** to take amortized time $\Omega(n^{1/2})$.

Intuition: *extract-min*
is only fast if it
compacts nodes into a
few trees.


There are $\Theta(n^{1/2})$ trees here.
What happens if we repeatedly
enqueue and ***extract-min*** a
small value?

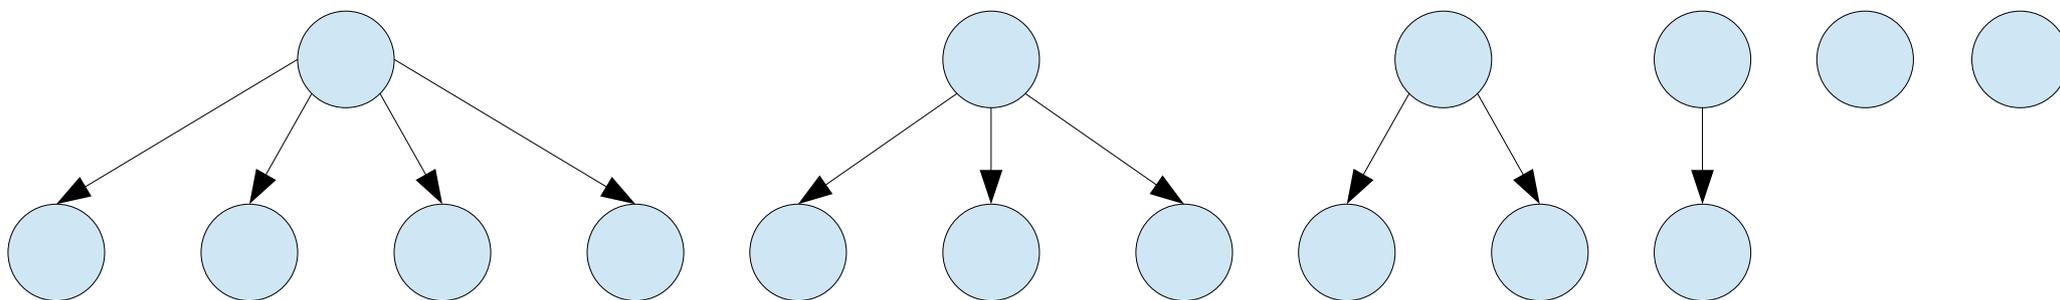

Claim: Because tree shapes aren't well-constrained, we
can force ***extract-min*** to take amortized time $\Omega(n^{1/2})$.

Intuition: *extract-min*
is only fast if it
compacts nodes into a
few trees.

There are $\Theta(n^{1/2})$ trees here.
What happens if we repeatedly
enqueue and ***extract-min*** a
small value?

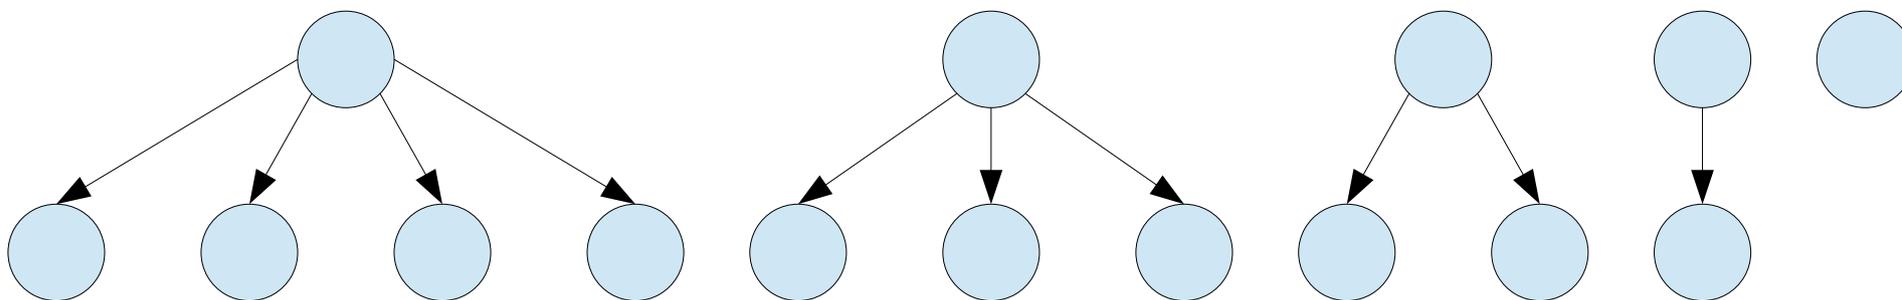


*(Do a bunch of work to compact the trees,
which doesn't accomplish anything.)*

Claim: Because tree shapes aren't well-constrained, we
can force ***extract-min*** to take amortized time $\Omega(n^{1/2})$.





Intuition: *extract-min*
is only fast if it
compacts nodes into a
few trees.

There are $\Theta(n^{1/2})$ trees here.
What happens if we repeatedly
enqueue and ***extract-min*** a
small value?

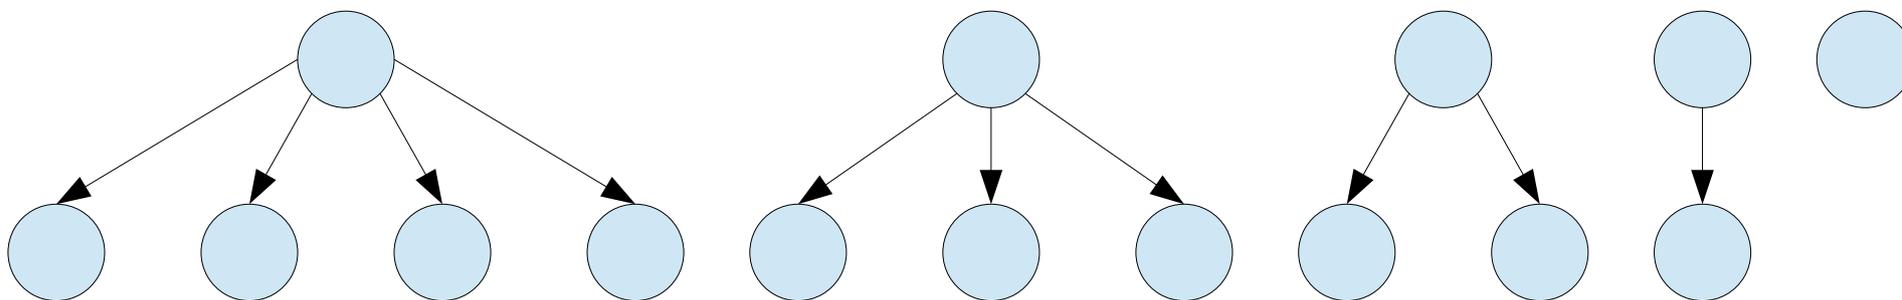

Each operation does
 $\Theta(n^{1/2})$ work, and doesn't
make any future
operations any better.


Claim: Because tree shapes aren't well-constrained, we
can force ***extract-min*** to take amortized time $\Omega(n^{1/2})$.

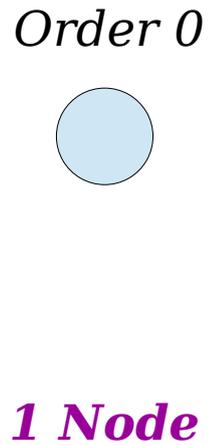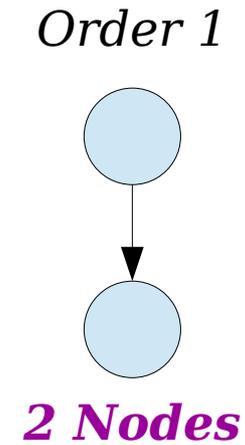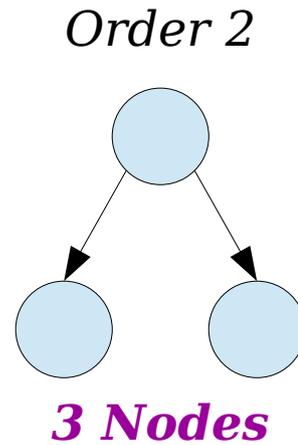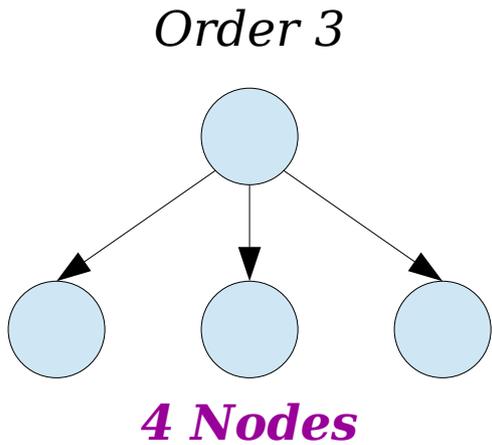

With n nodes, it's possible to have $\Omega(n^{1/2})$ trees of distinct orders.


Question: Why didn't this happen before?

Order 3

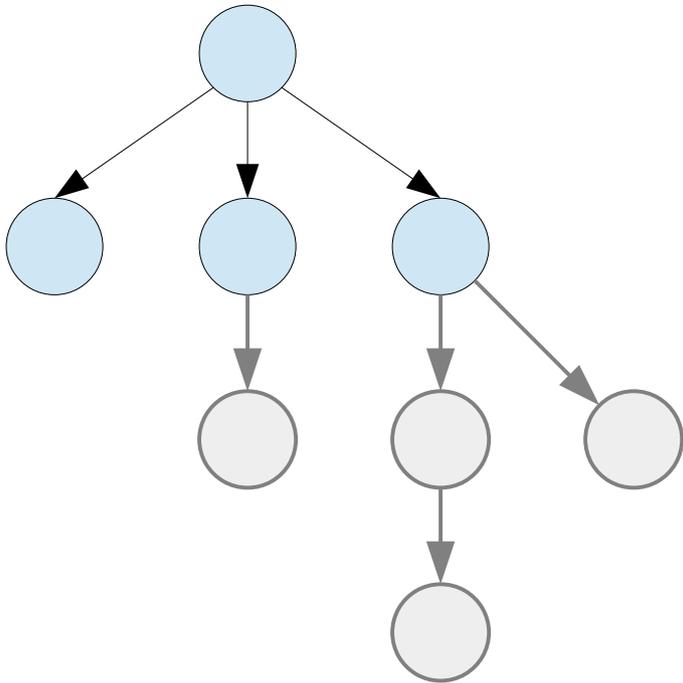


8 Nodes

Order 2

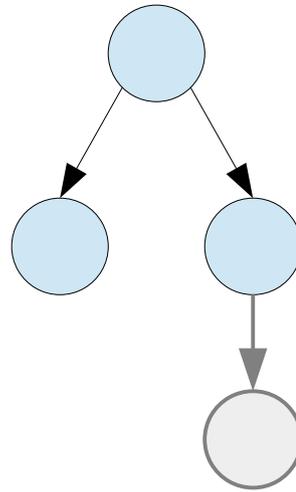


4 Nodes

Order 1

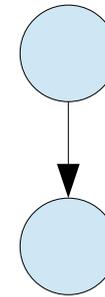

2 Nodes

Order 0




1 Node

Binomial tree sizes grow exponentially.
With n nodes, we can have at most $O(\log n)$ trees of distinct orders.

Question: Why didn't this happen before?

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

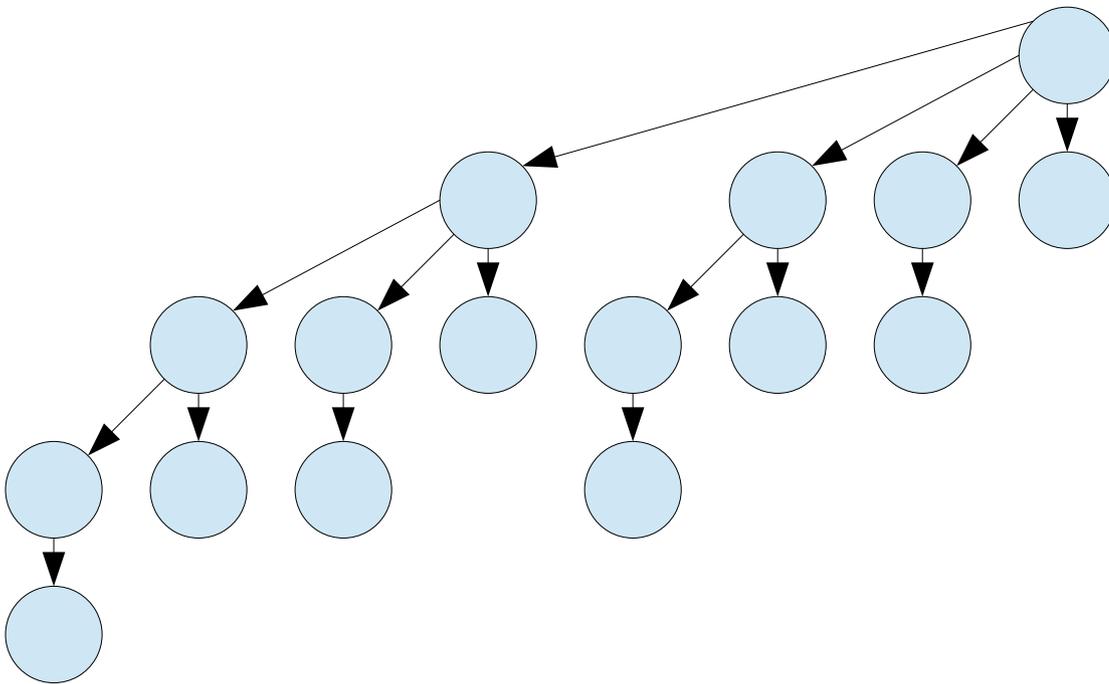

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

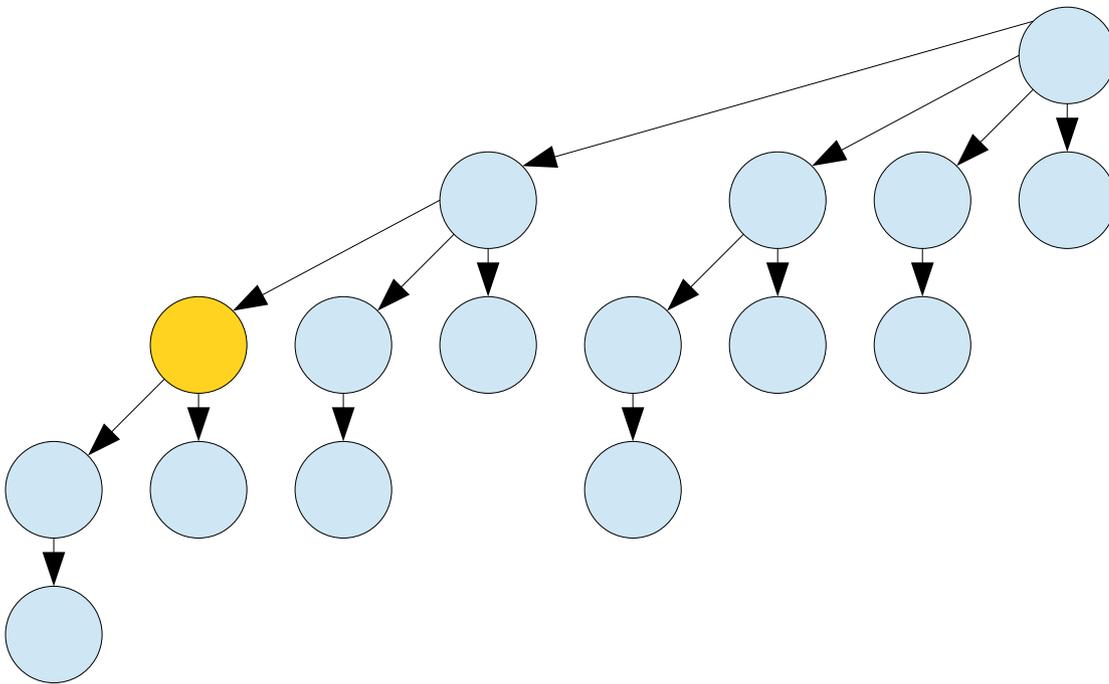

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

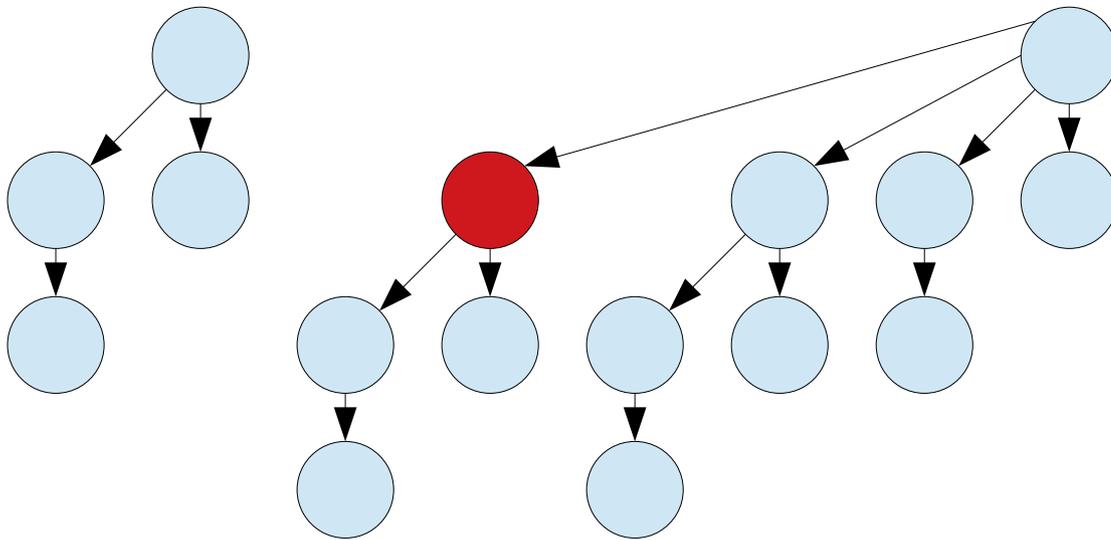

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

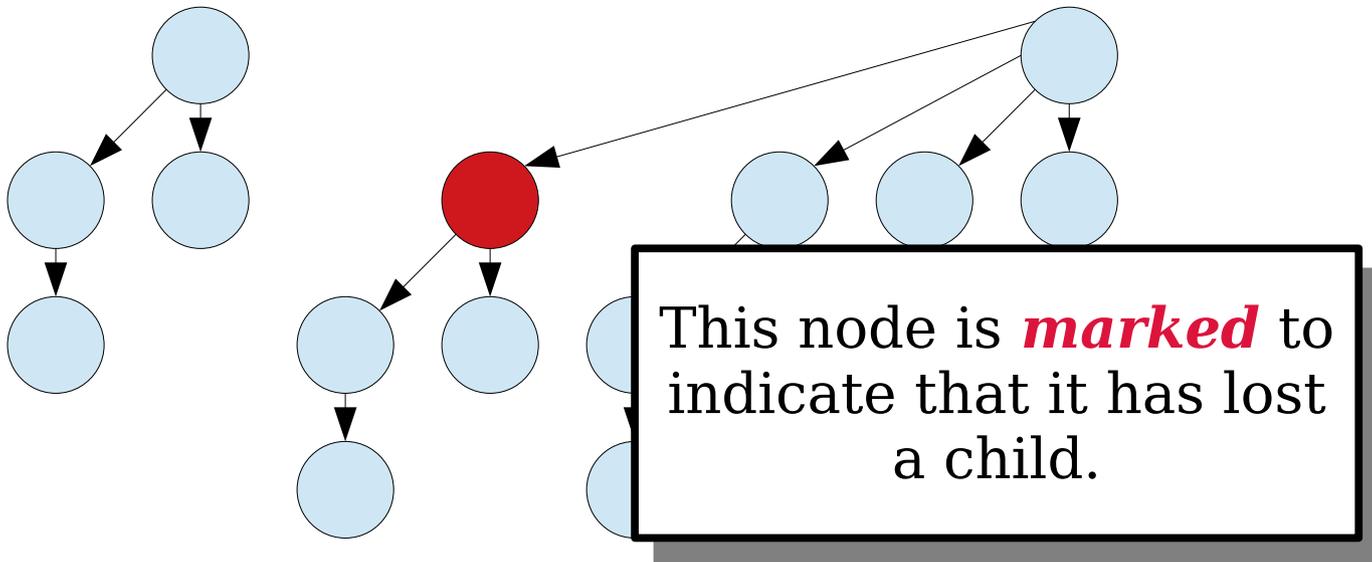

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

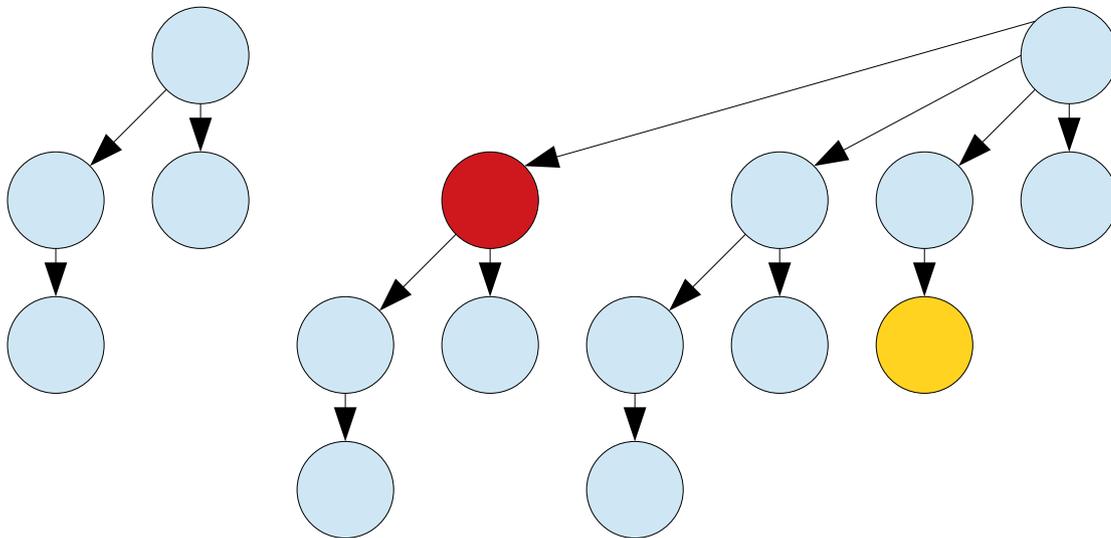

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

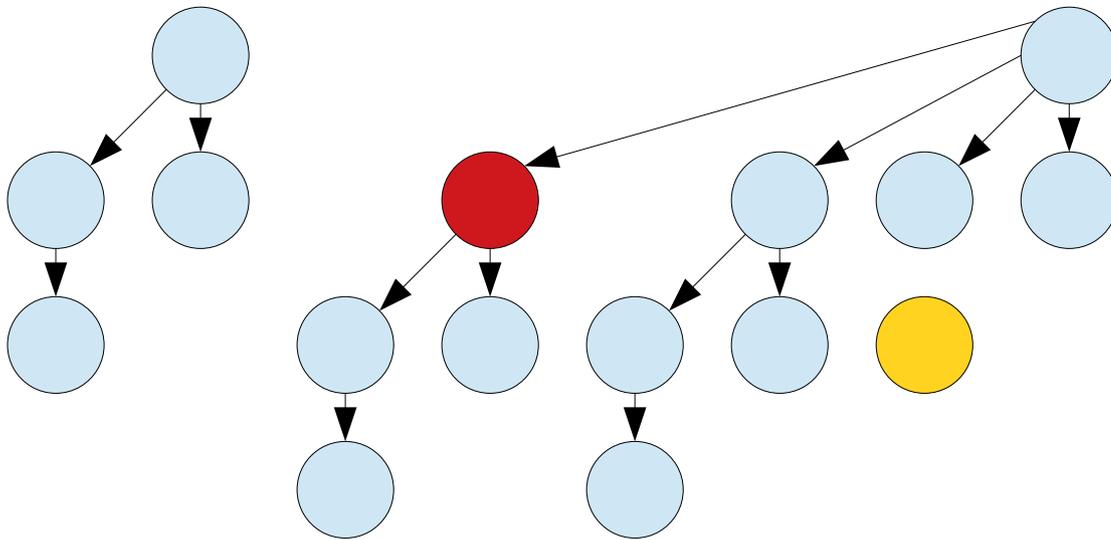

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

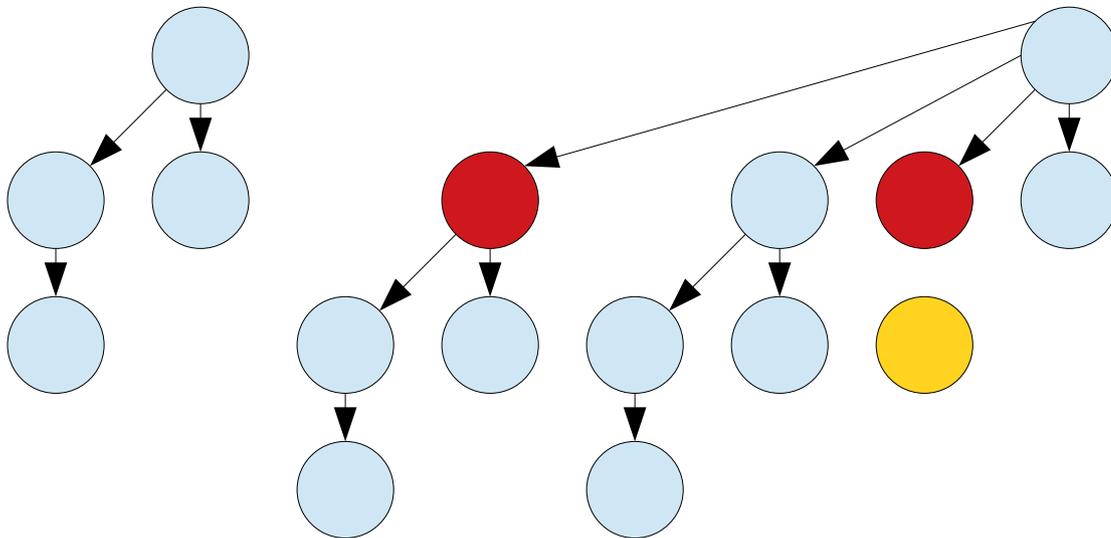

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

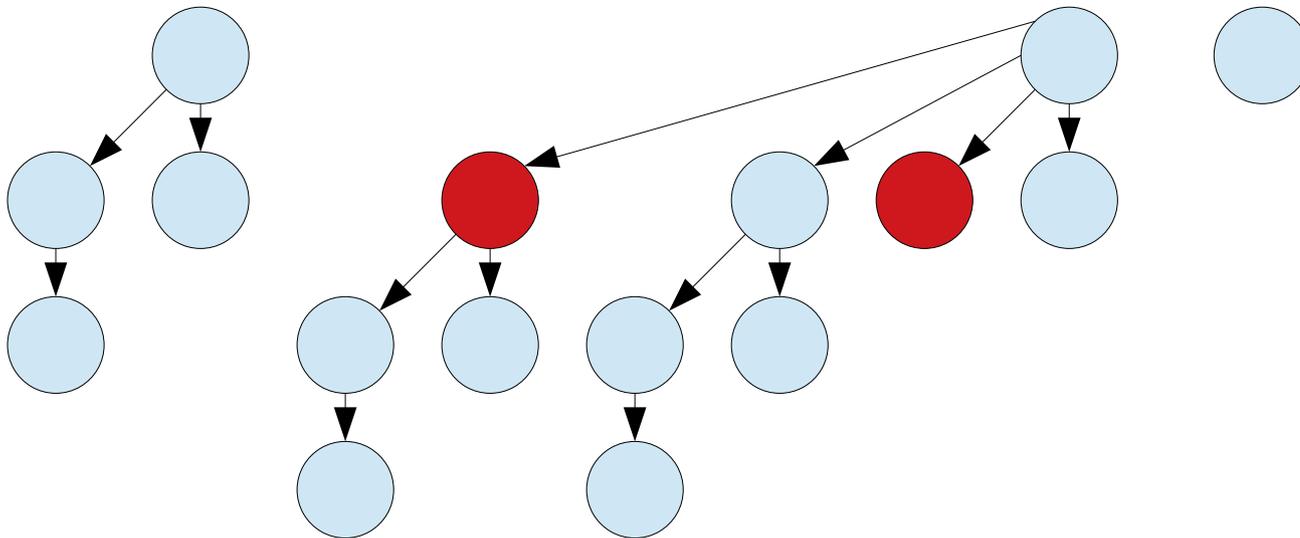

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

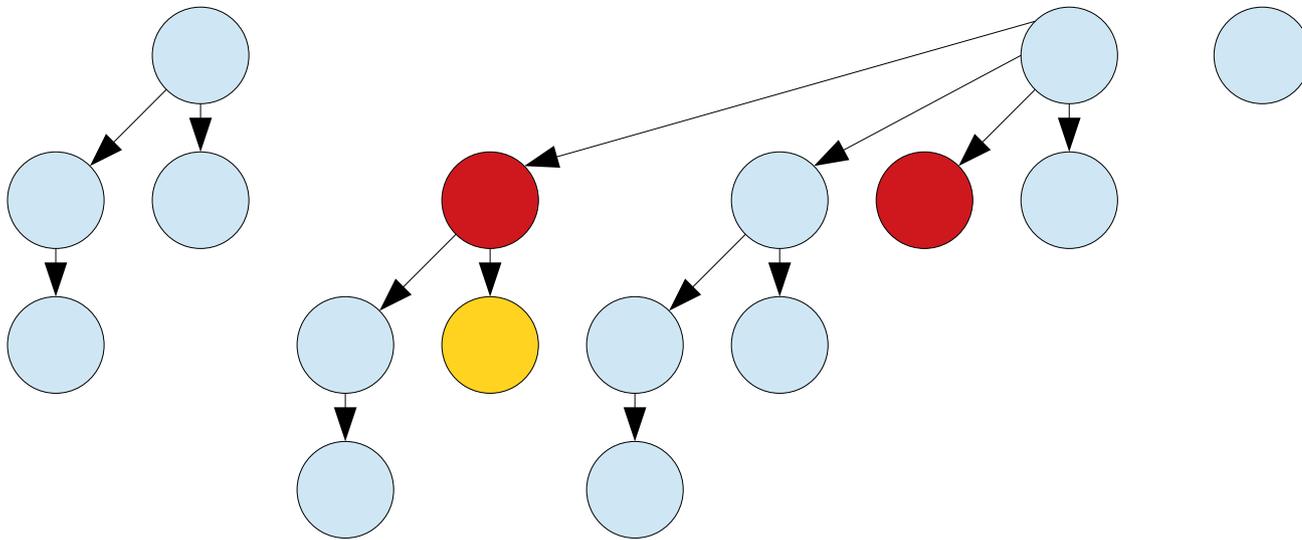

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

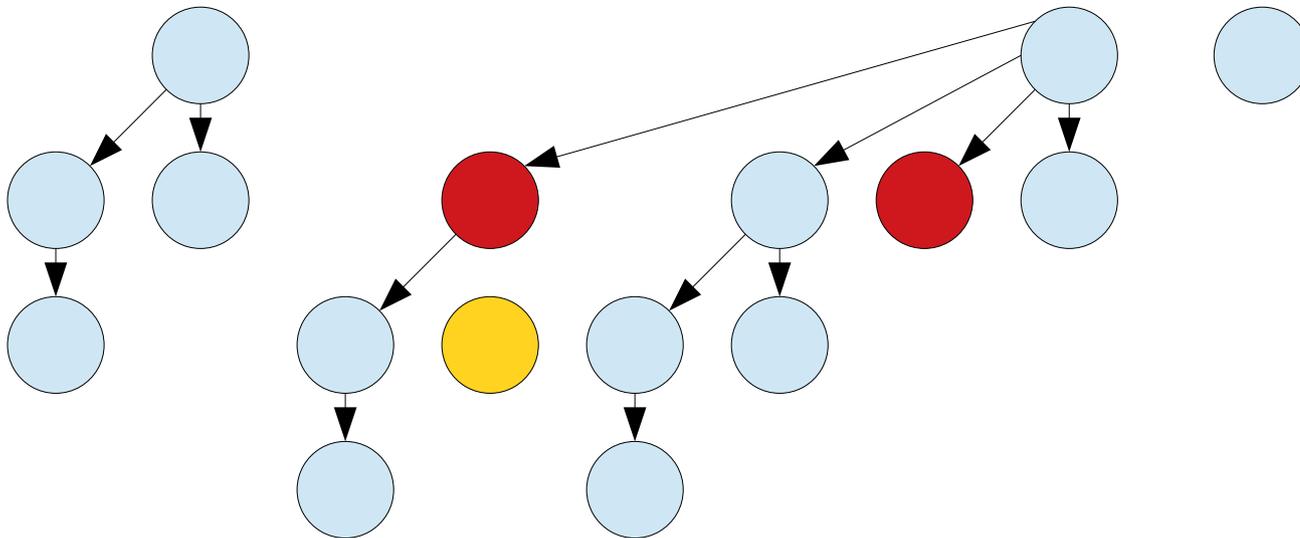

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

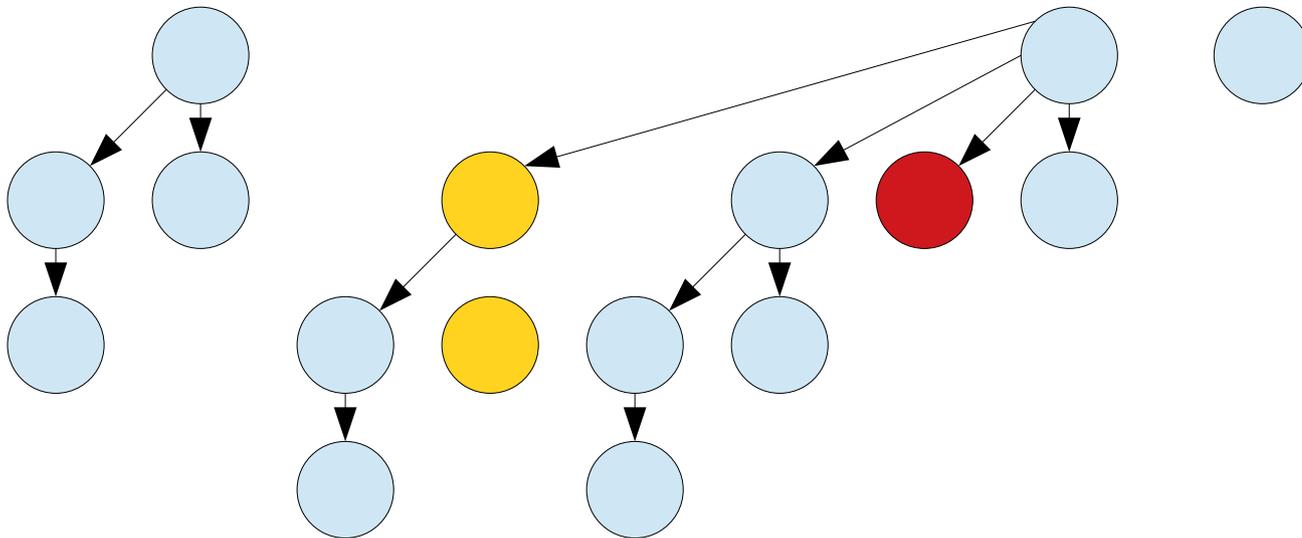

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

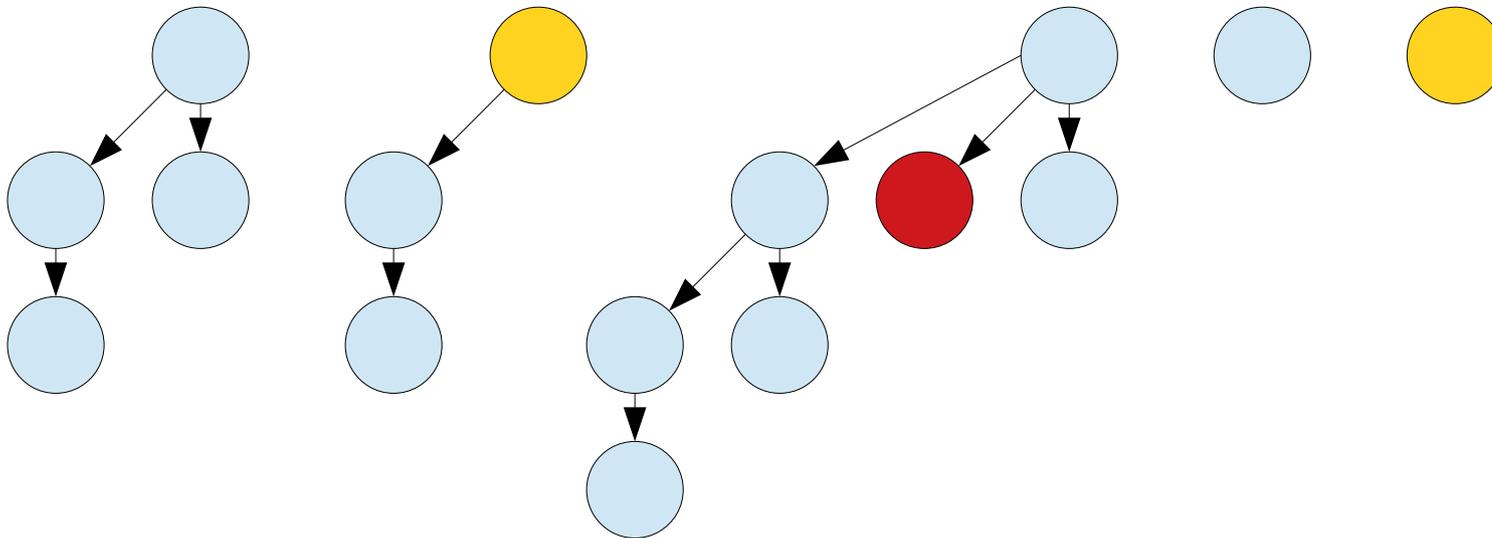

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

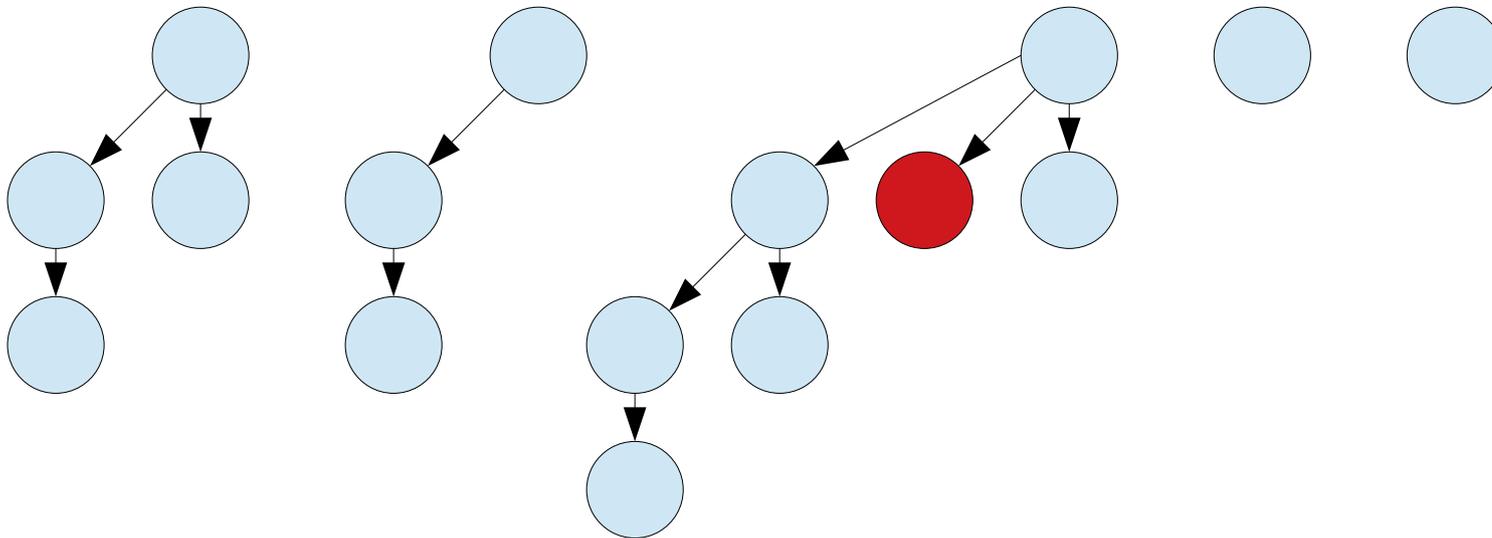

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

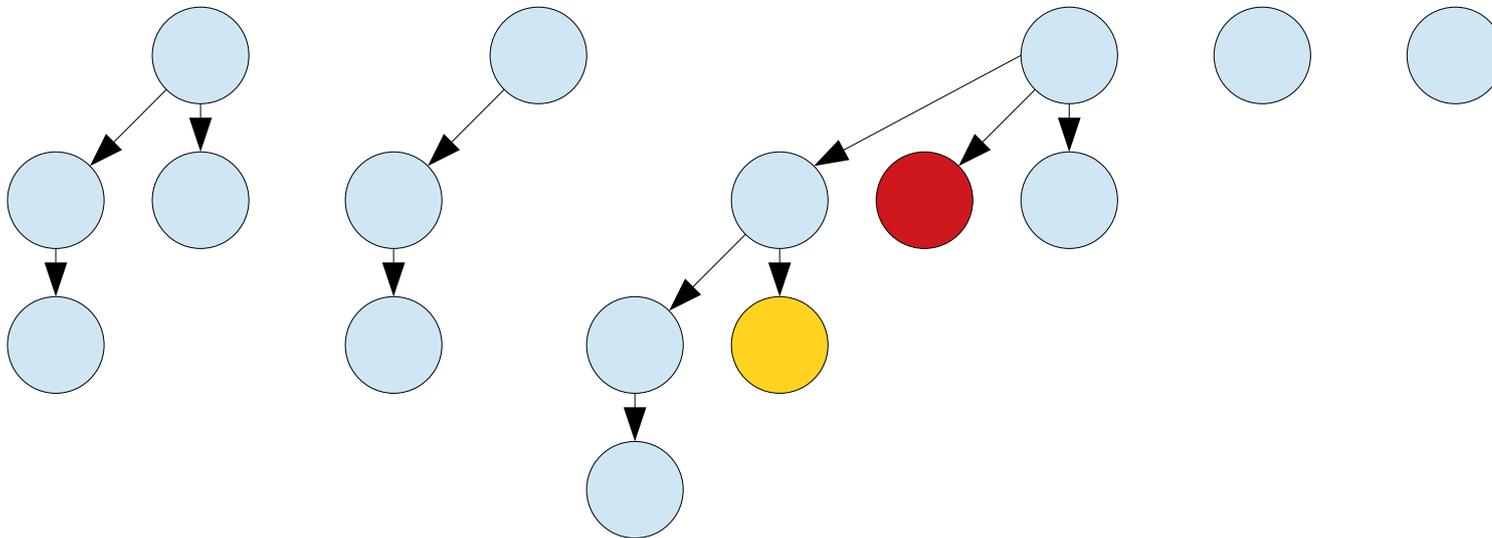

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

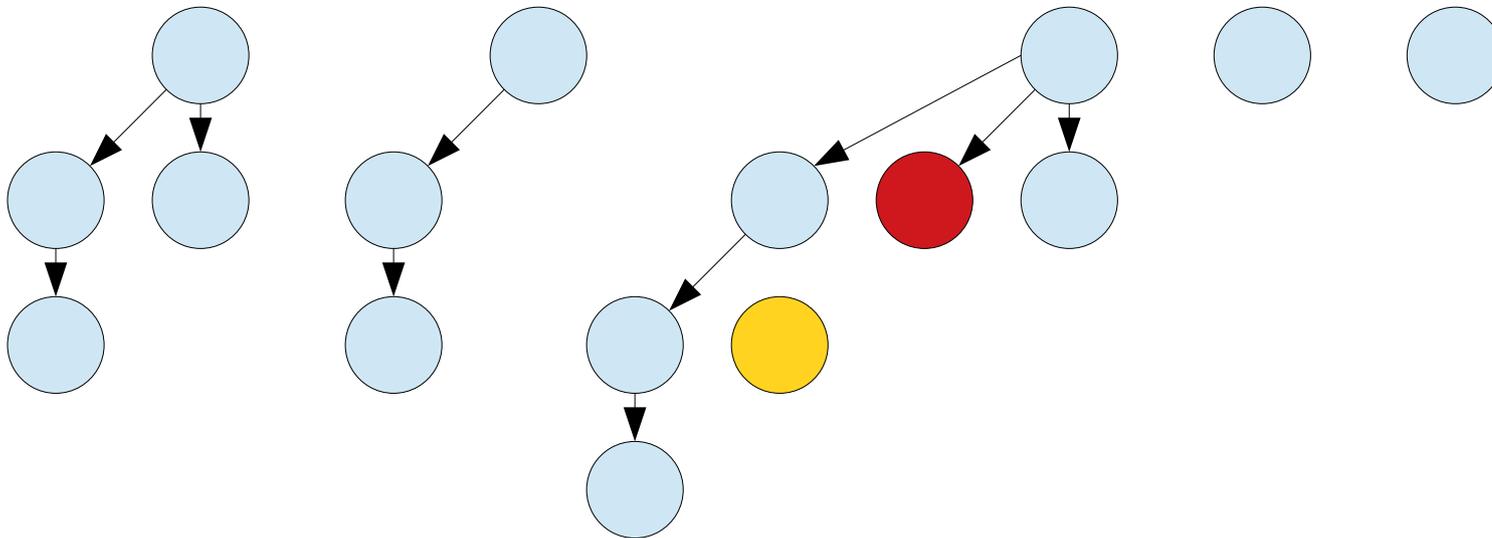

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

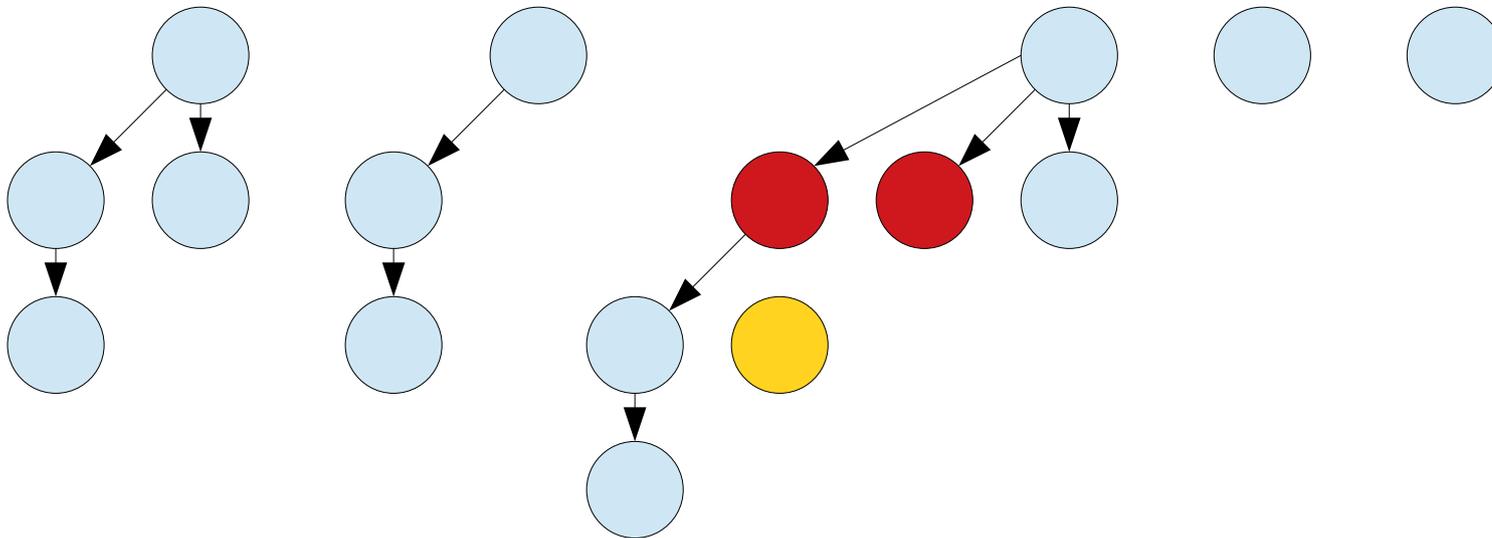

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

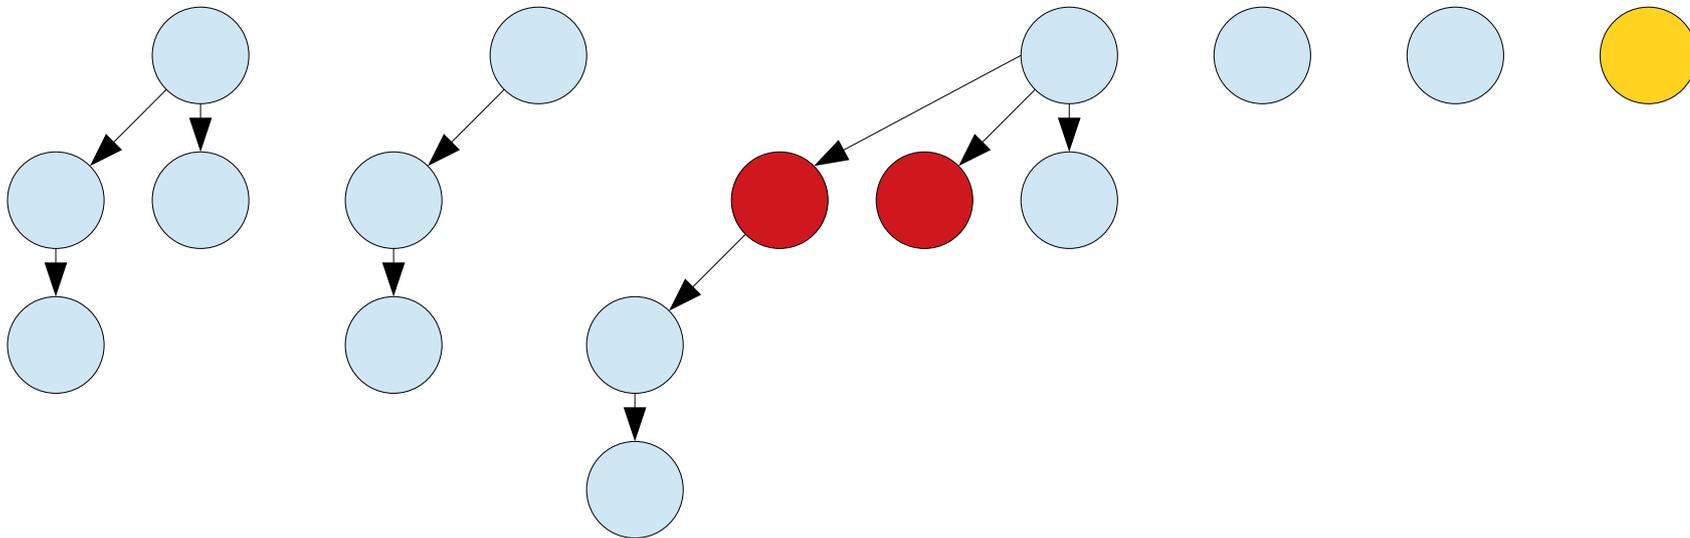

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

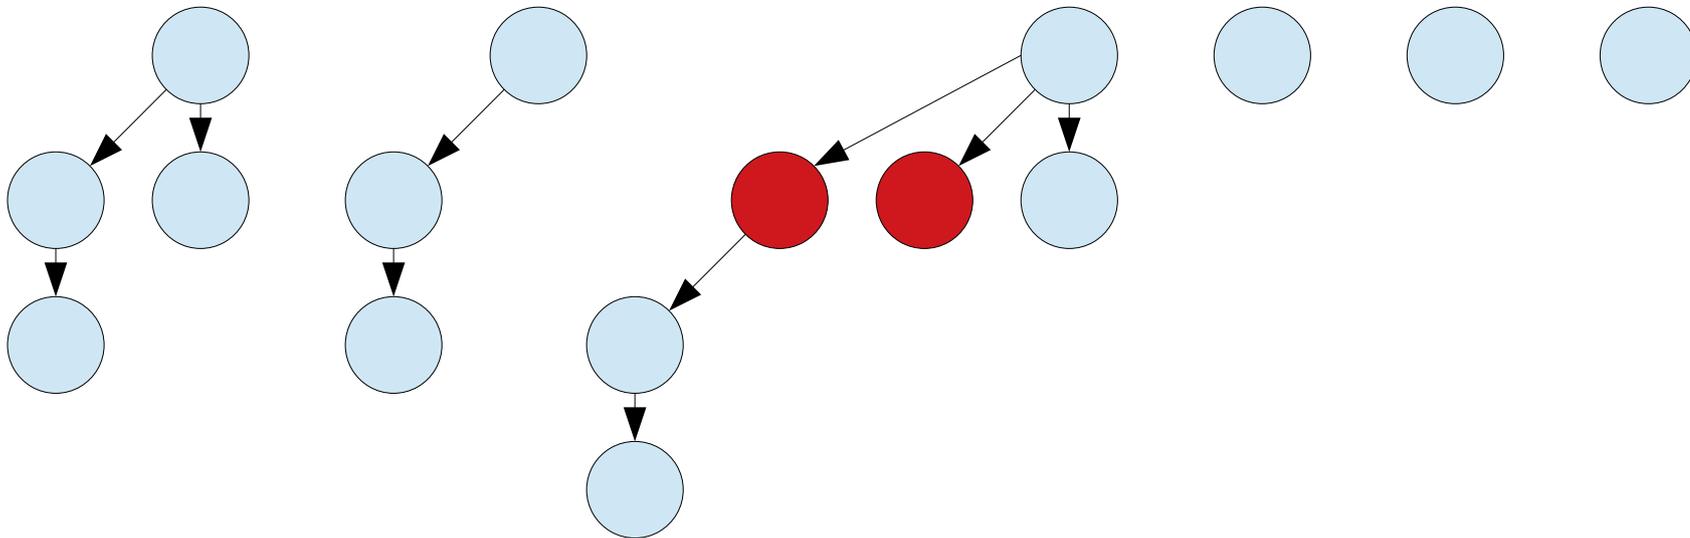

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

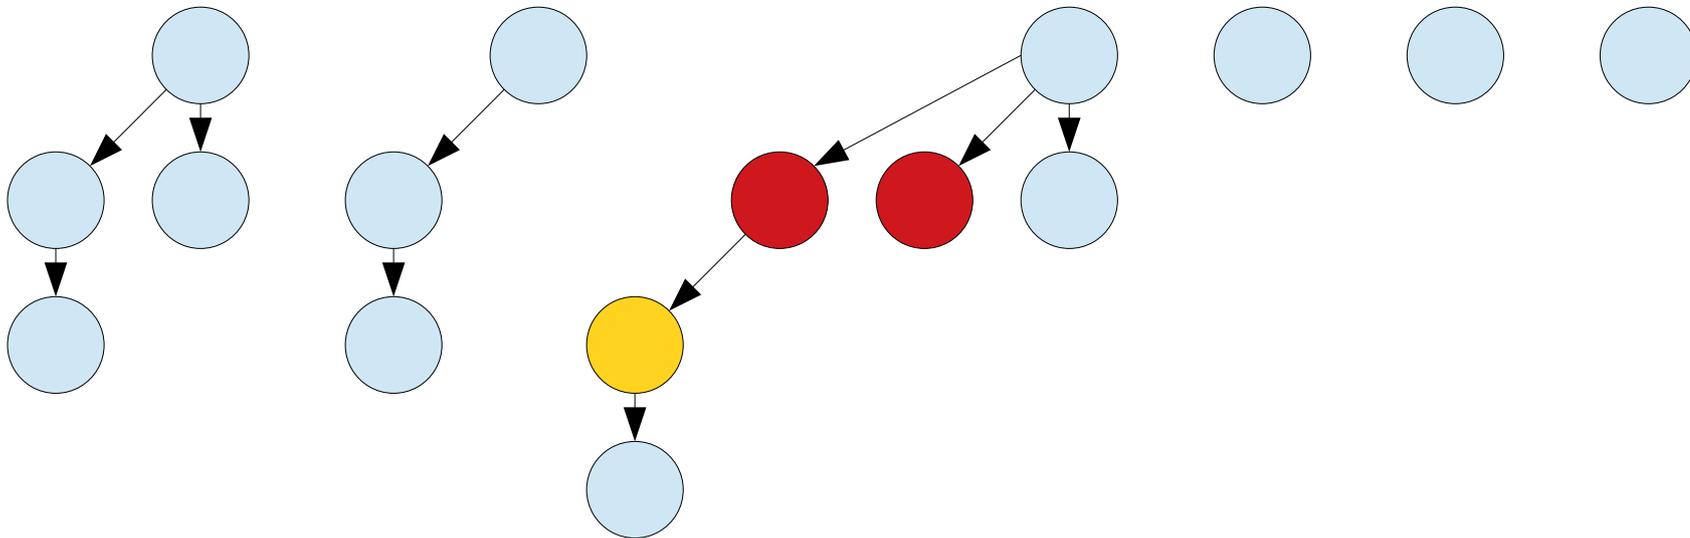

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

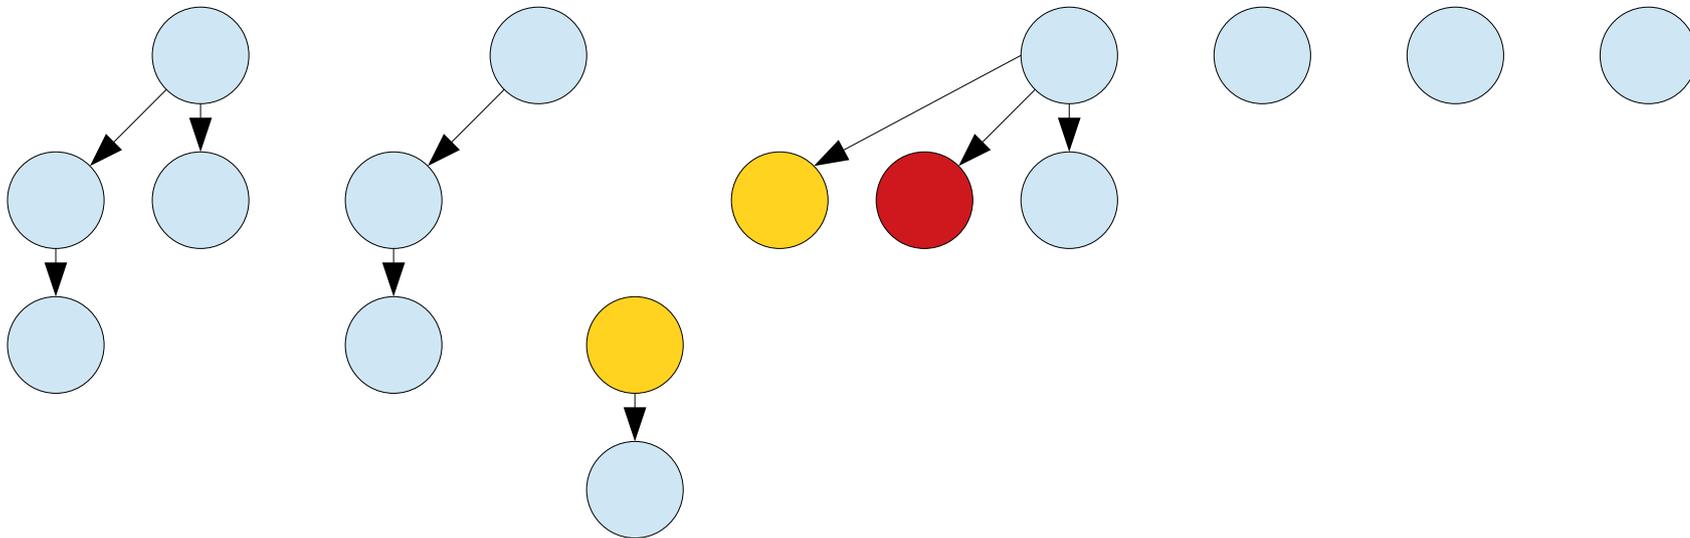

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

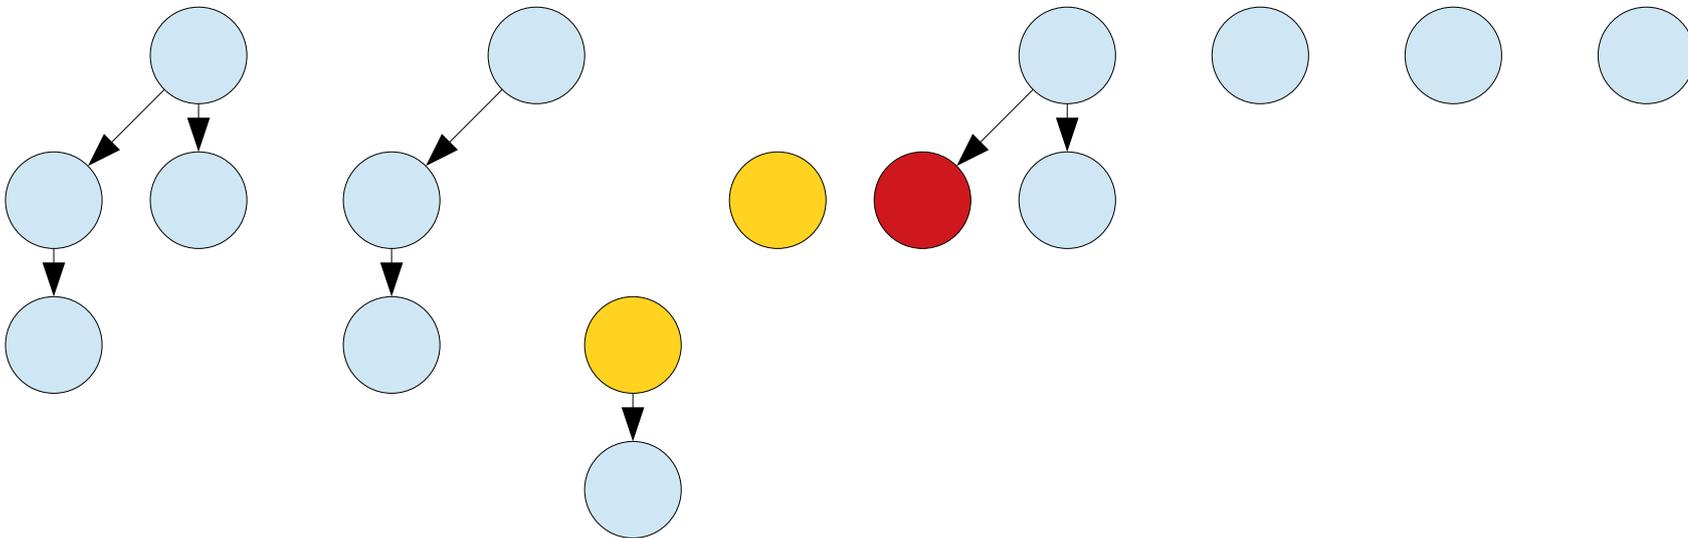

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

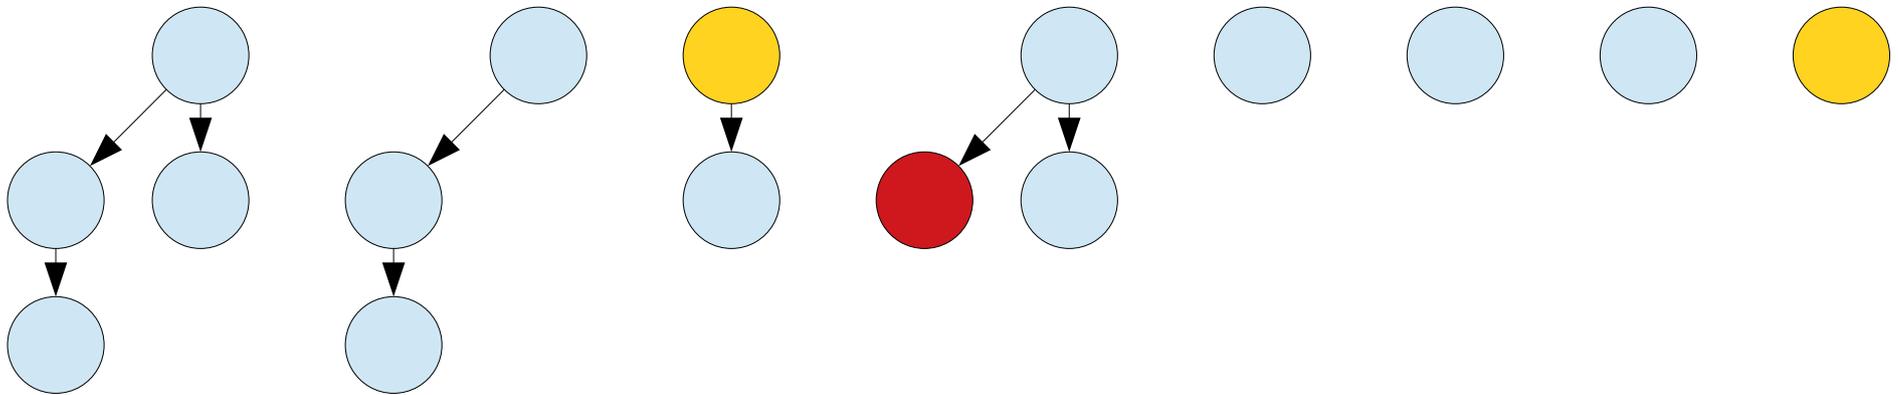

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

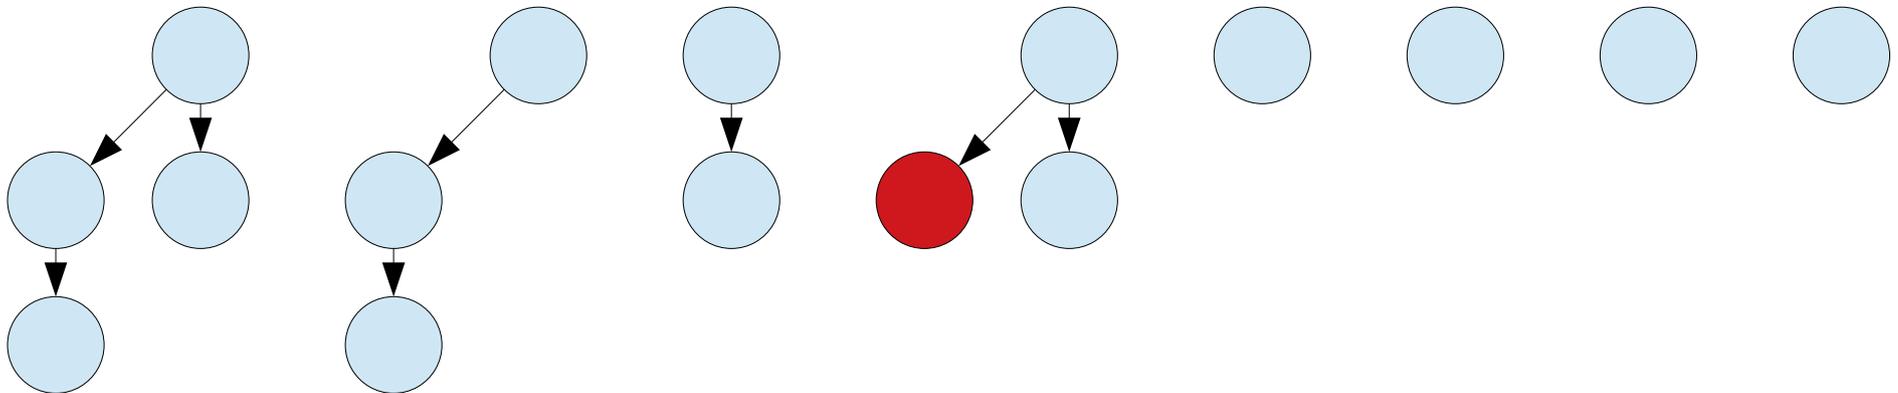

Goal: Make tree sizes grow exponentially with order, but still allow for subtrees to be cut out quickly.

Intuition: Allow trees to get somewhat imbalanced, slowly propagating information to the root.


Rule: Nodes can lose at most one child. If a node loses two children, cut it from its parent.

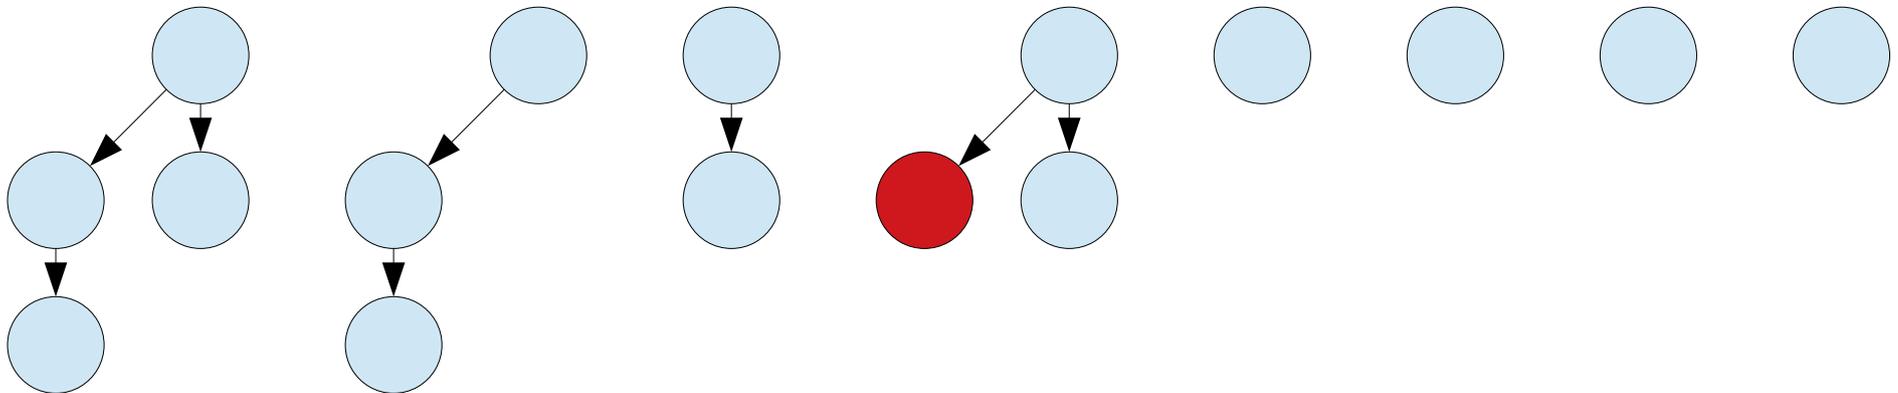

Question: Does this guarantee exponential tree size?

Maximally-Damaged Trees

- Here's a binomial tree of order 4. That is, the root has four children.
- **Question:** Using our marking scheme, how many nodes can we remove without changing the order of the tree?
- Equivalently: how many nodes can we remove without removing any direct children of the root?

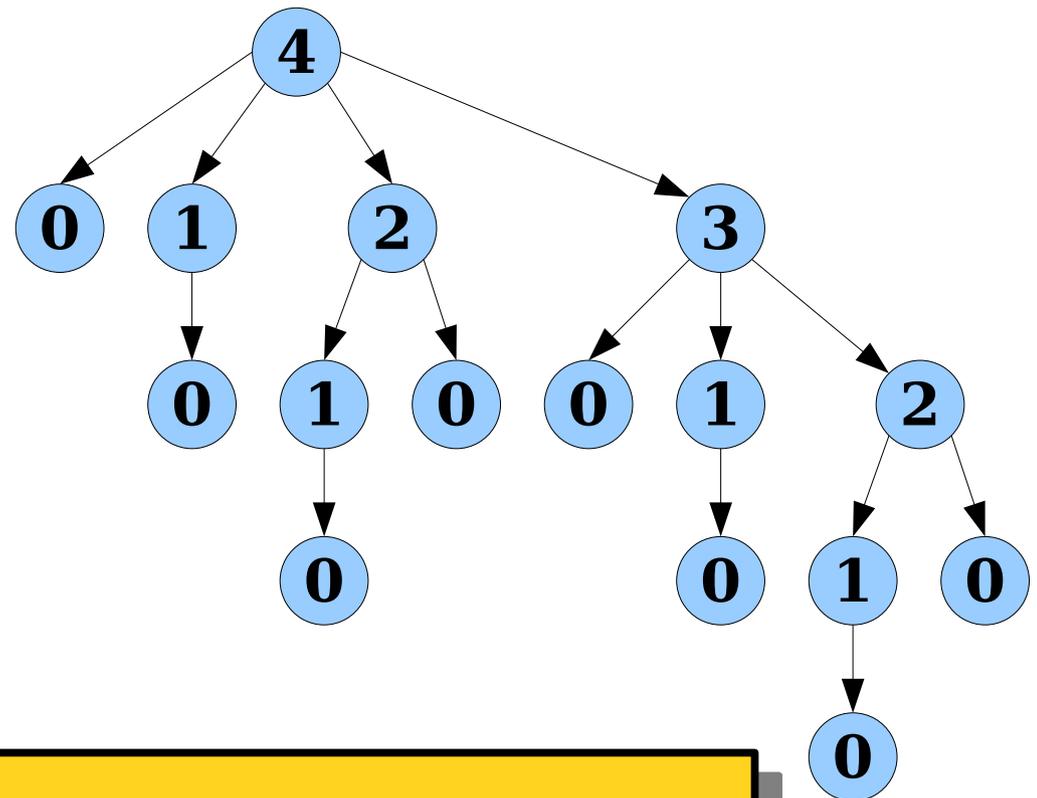

Answer at


<https://cs166.stanford.edu/pollev>

Maximally-Damaged Trees


Maximally-Damaged Trees

0

Maximally-Damaged Trees

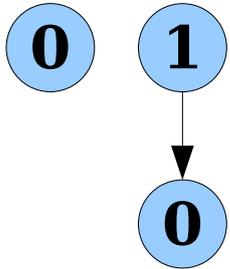


Maximally-Damaged Trees

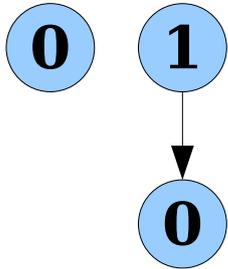


We can't cut any nodes from this tree without making the root node have order 0.

Maximally-Damaged Trees

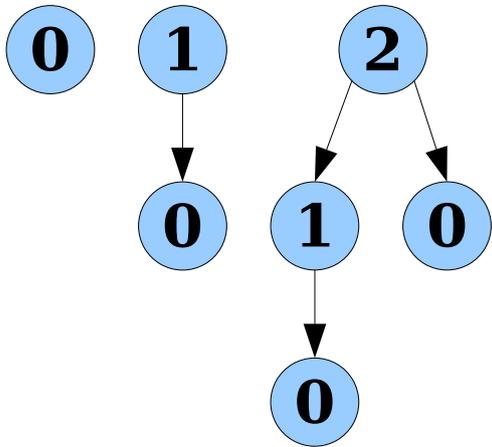


Maximally-Damaged Trees

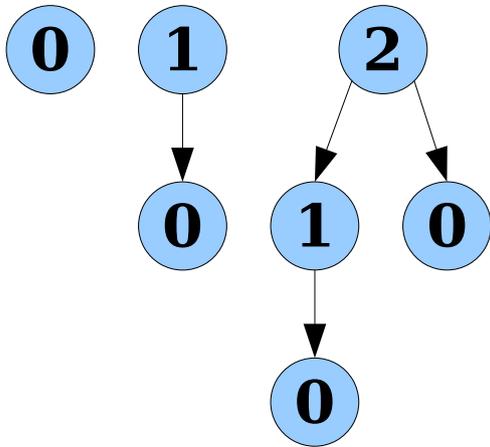

We can't cut any of the root's children without decreasing its order.


Maximally-Damaged Trees

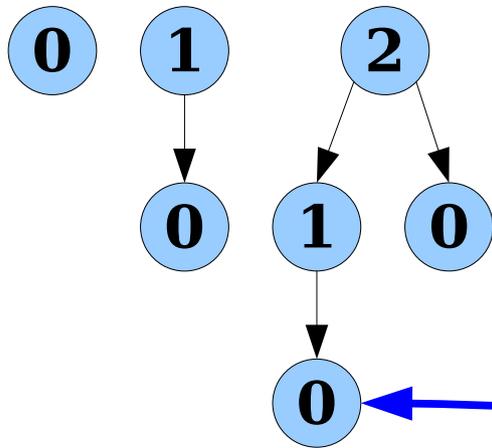


We can't cut any of the root's children without decreasing its order.

However, we can cut this node, leaving the root node with two children.


Maximally-Damaged Trees

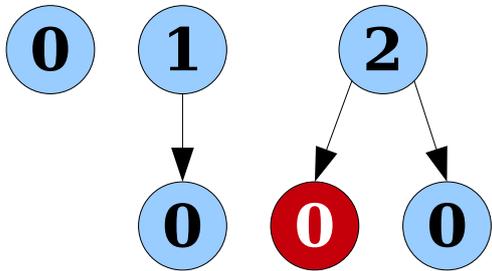

Maximally-Damaged Trees

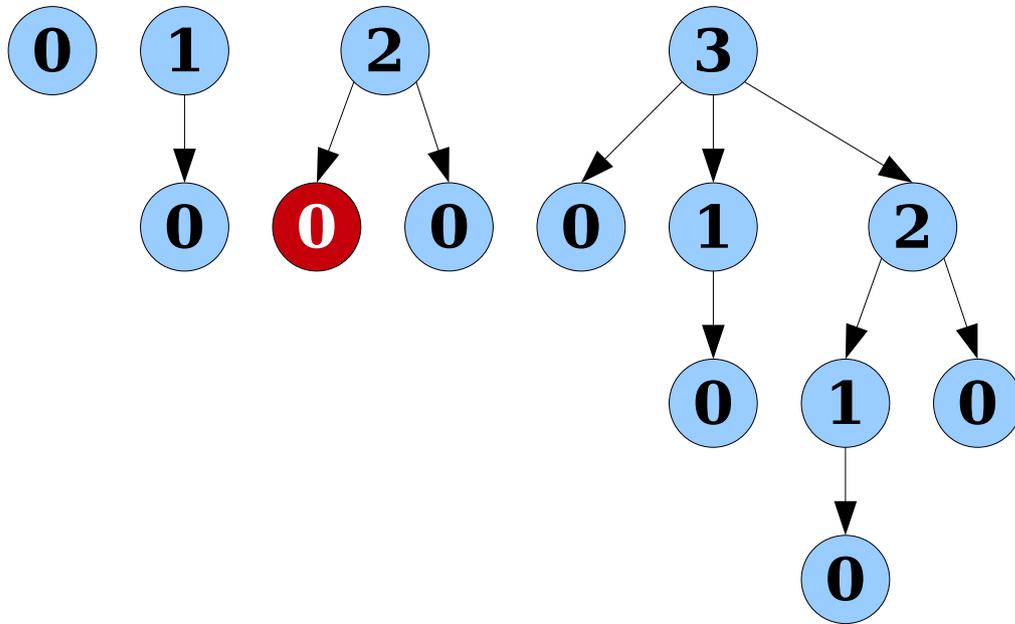


Maximally-Damaged Trees

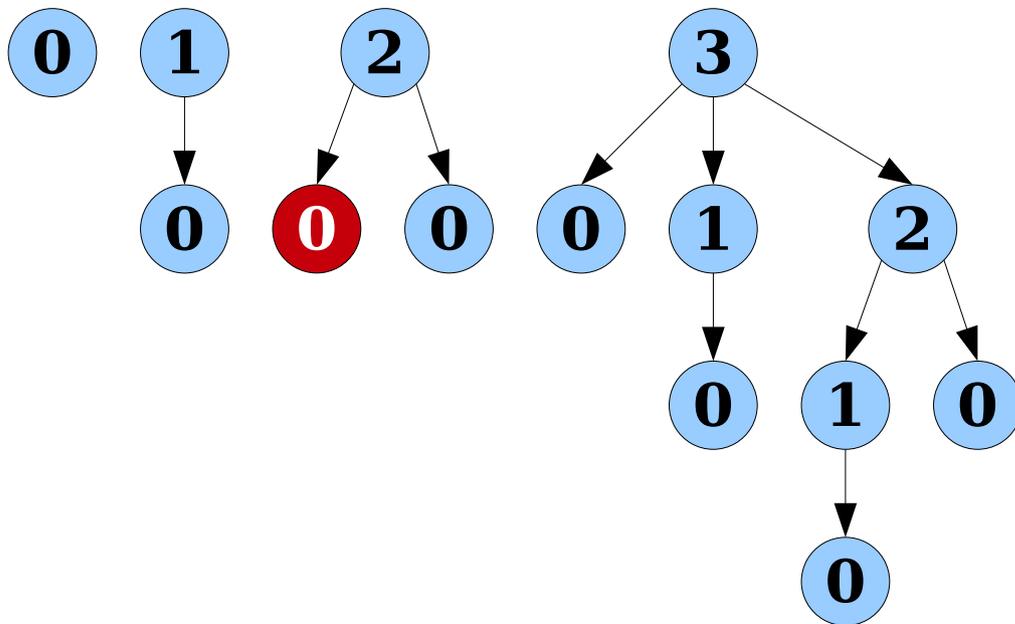

As before, we can't cut any of the root's children without decreasing its order.


Maximally-Damaged Trees

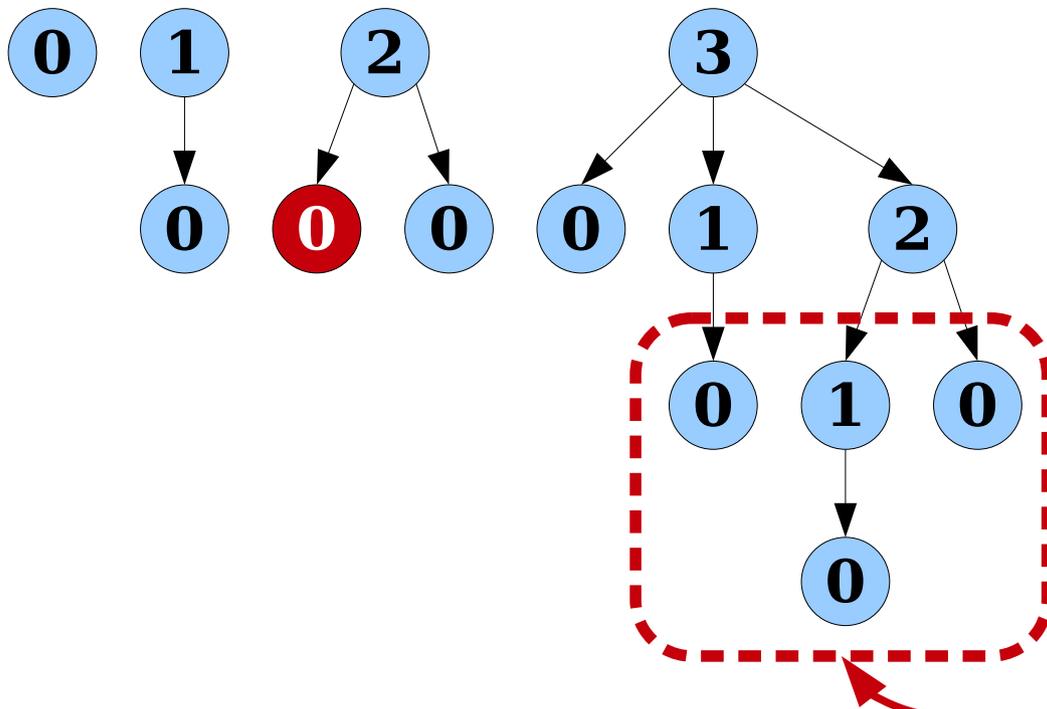


As before, we can't cut any of the root's children without decreasing its order.

However, any nodes below the second layer are fair game to be eliminated.


Maximally-Damaged Trees

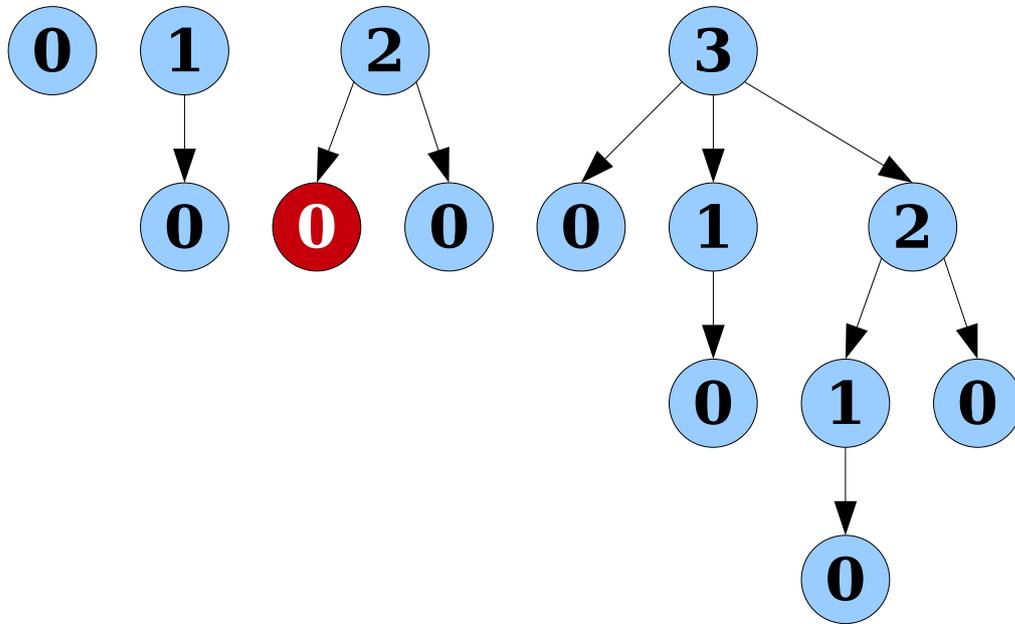


Maximally-Damaged Trees

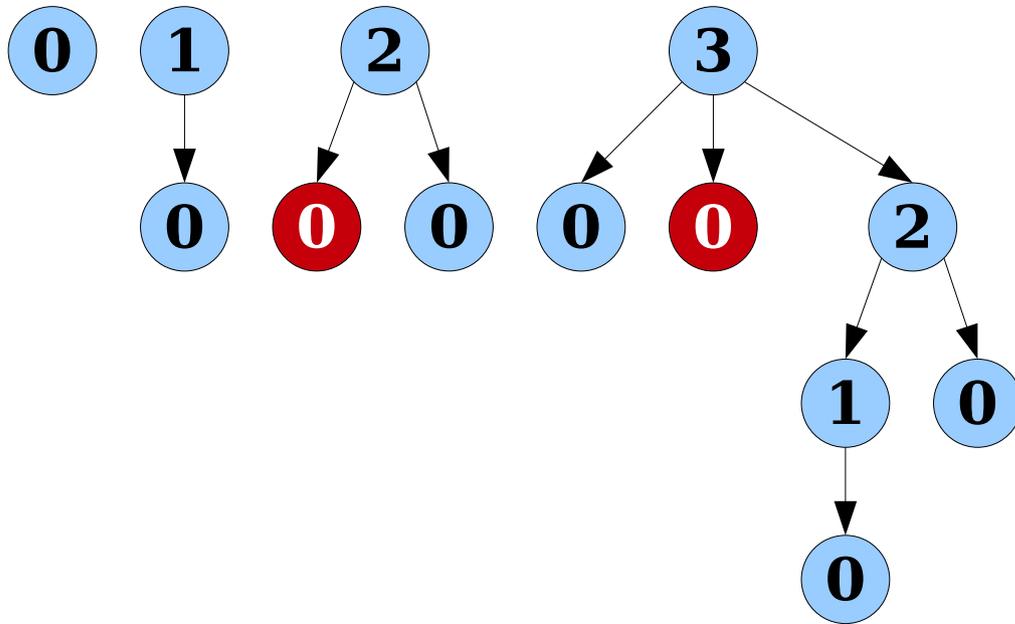

Maximally-Damaged Trees

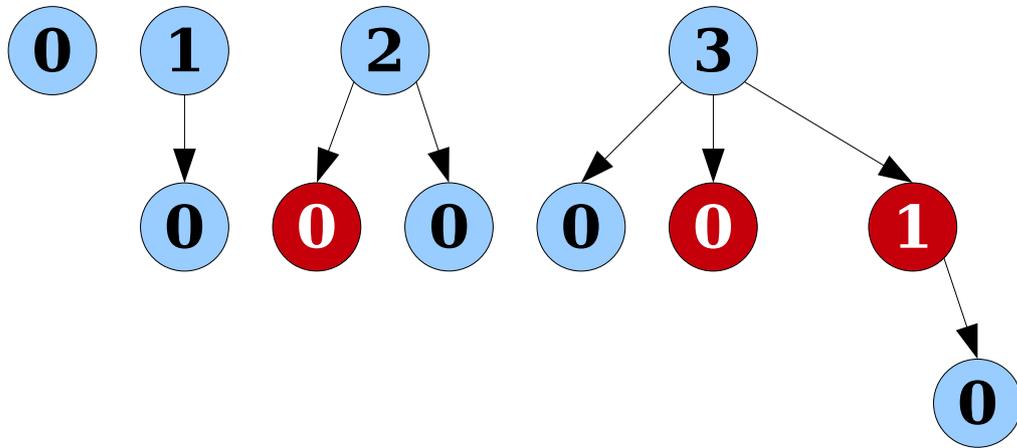


Maximally-Damaged Trees

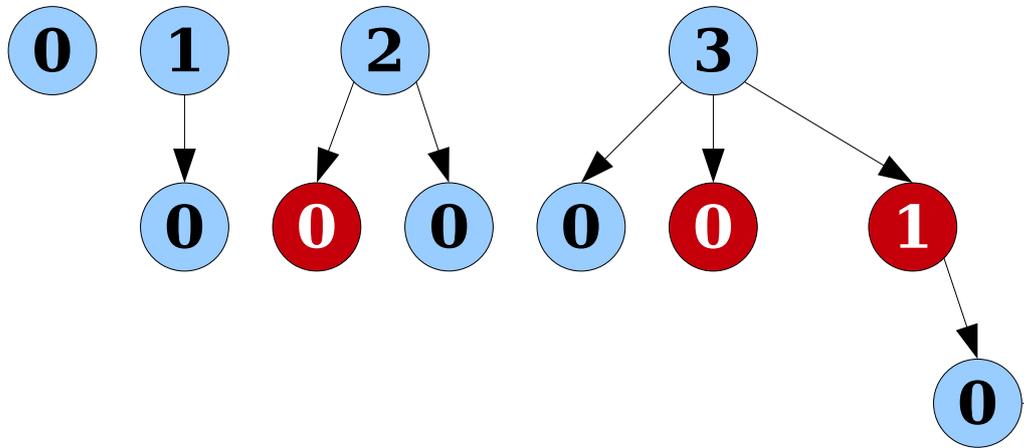


We can't cut this node without triggering a cascading cut, so we're done.

Maximally-Damaged Trees

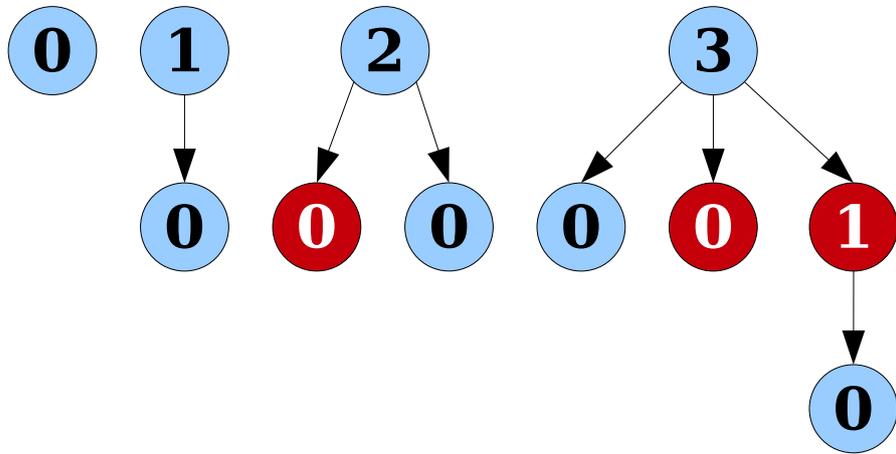


Maximally-Damaged Trees

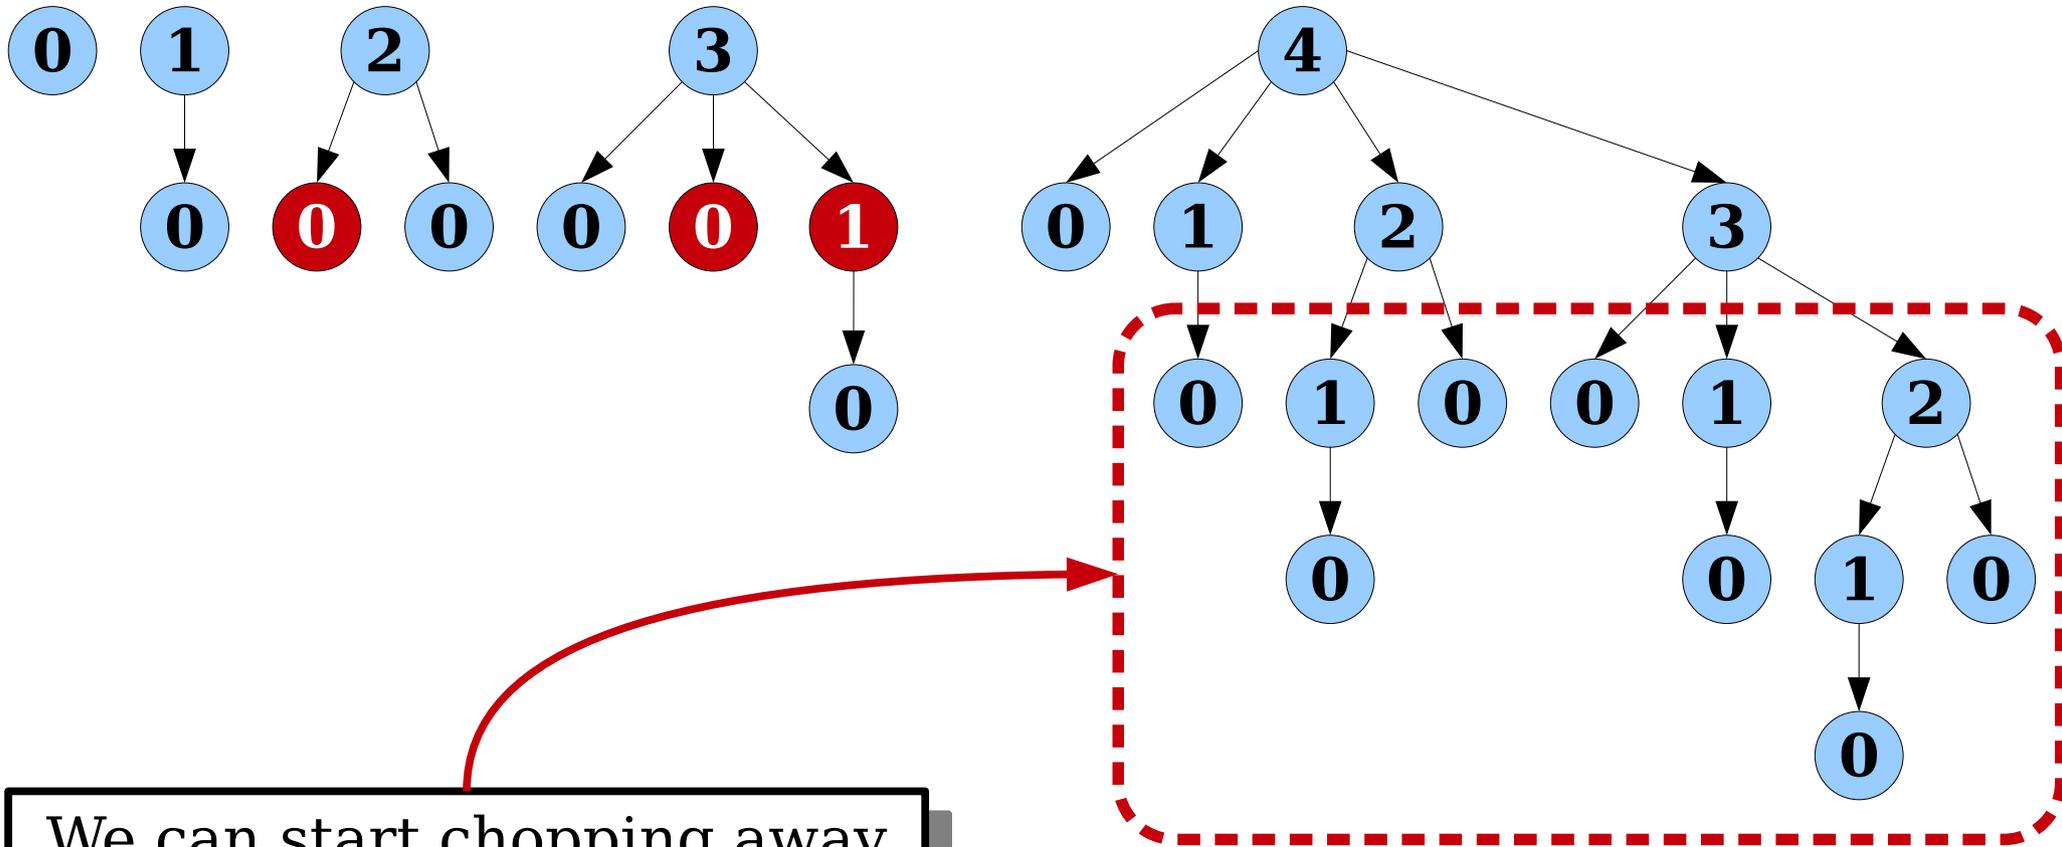


We can start chopping away at these nodes!


Maximally-Damaged Trees

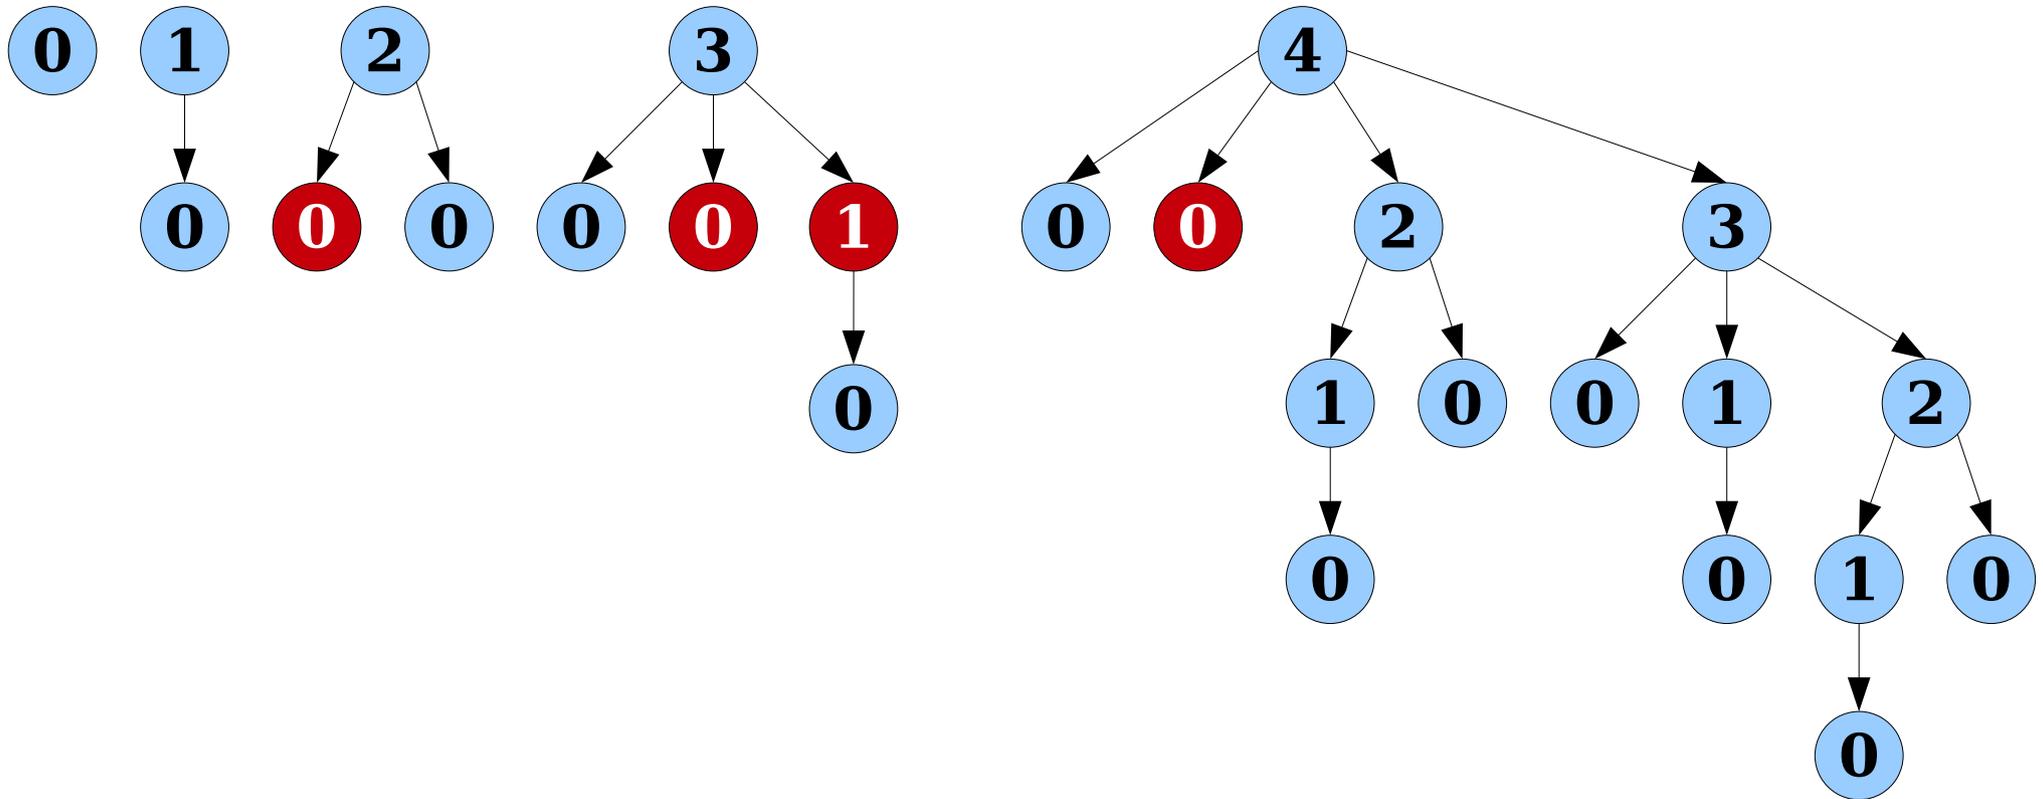


Maximally-Damaged Trees

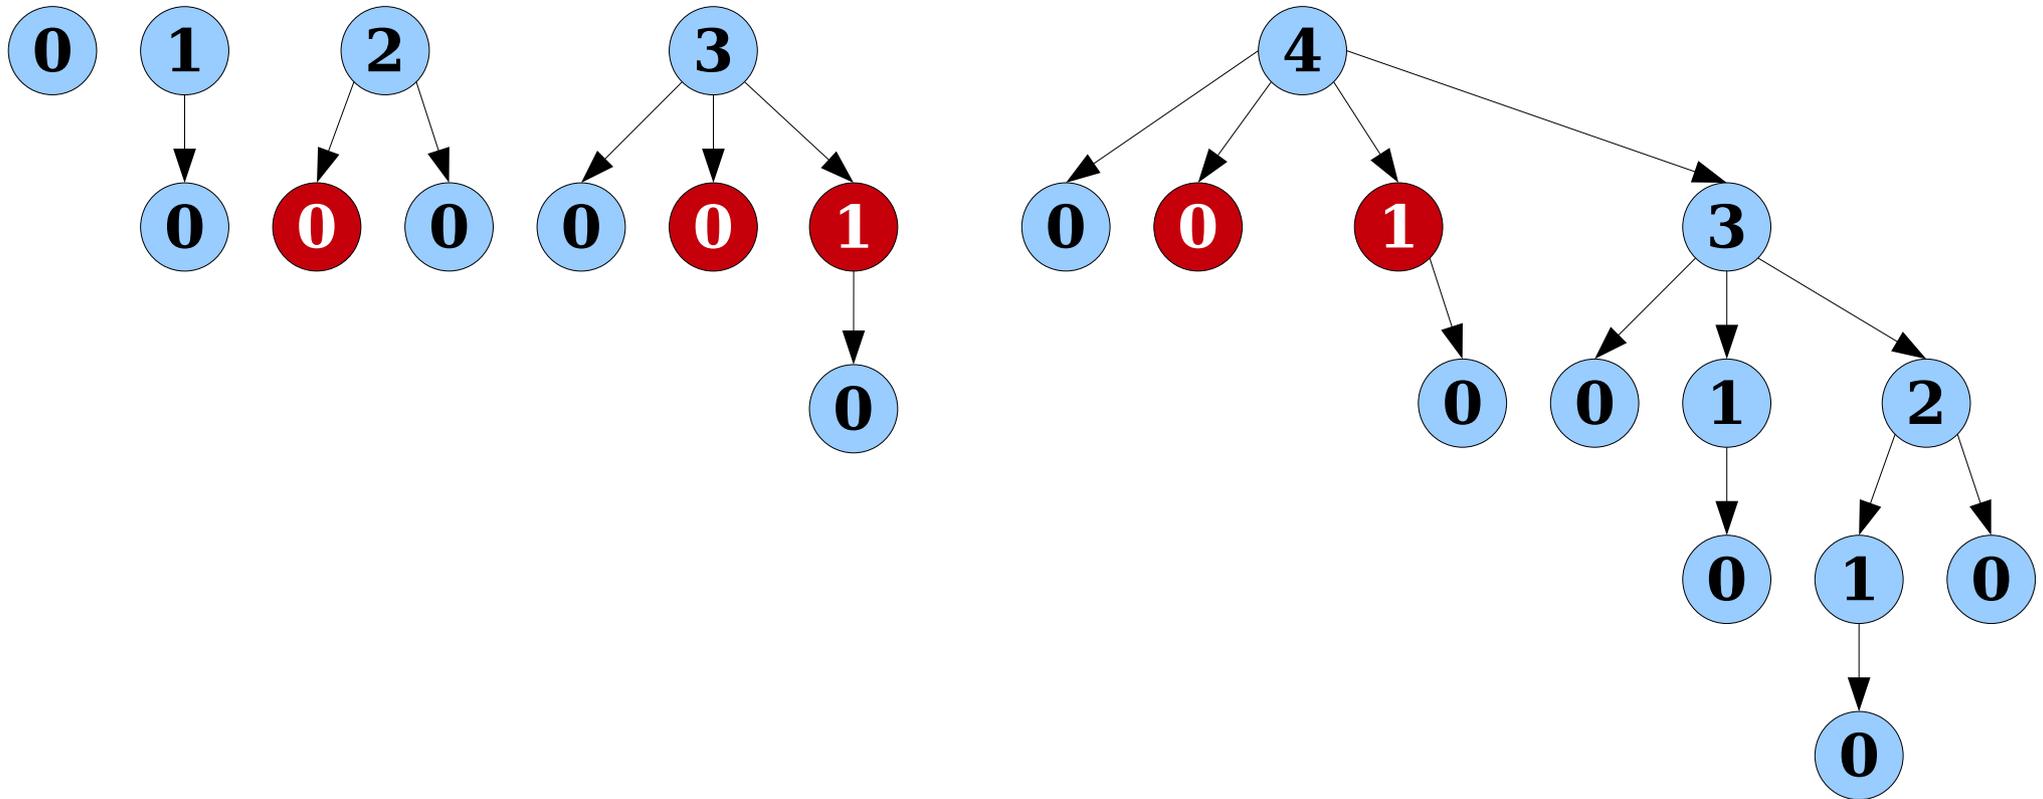


Maximally-Damaged Trees

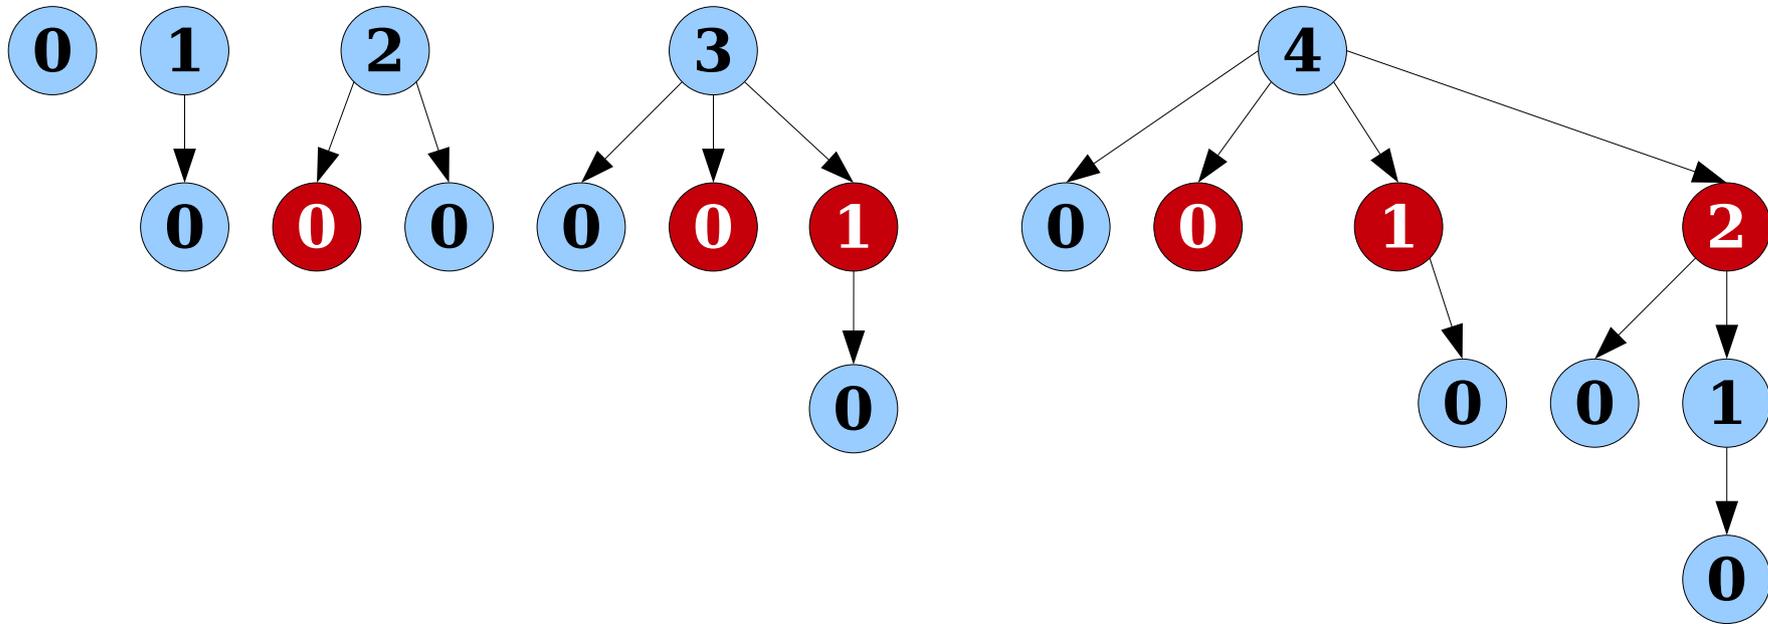


Maximally-Damaged Trees

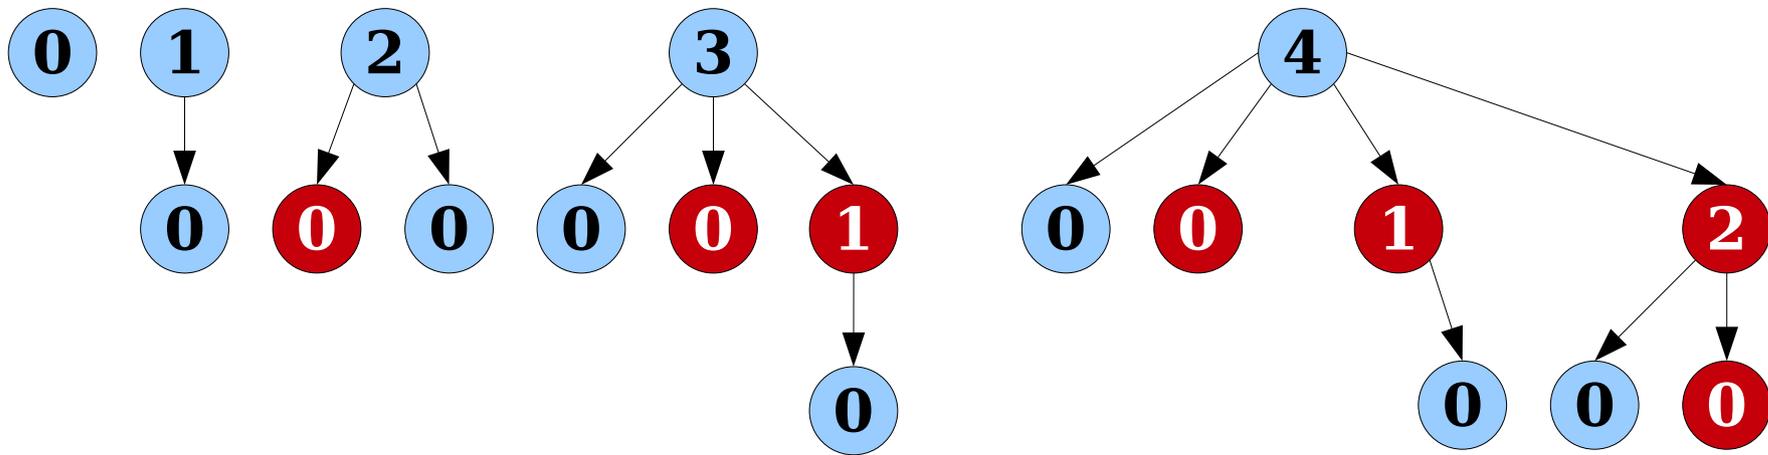


Maximally-Damaged Trees

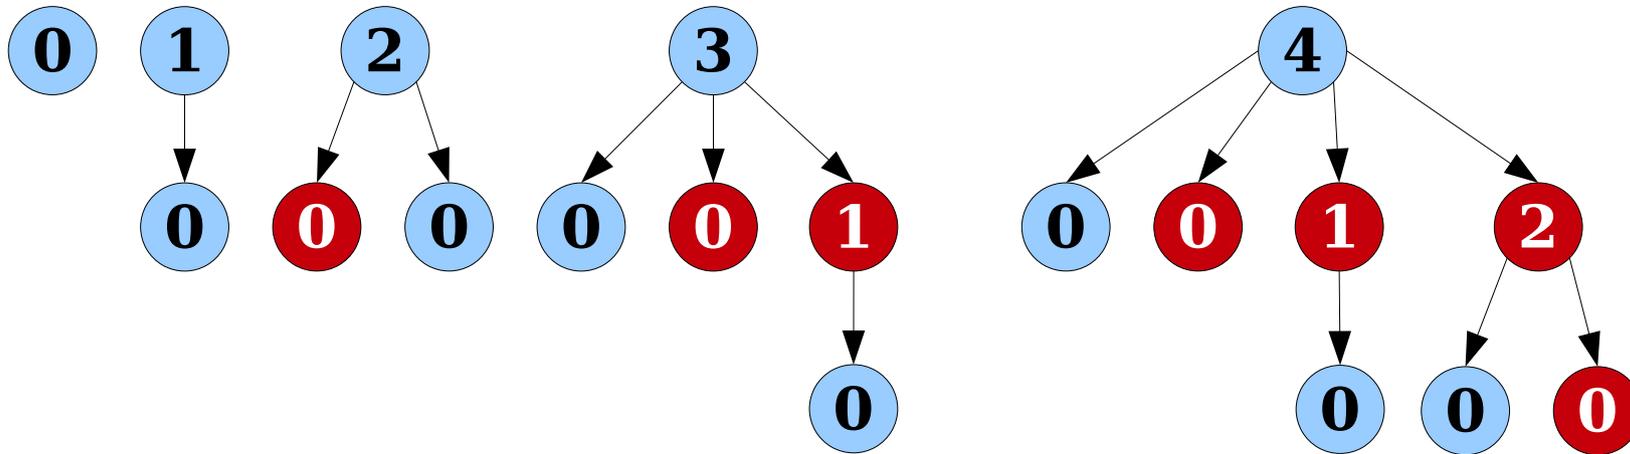


Maximally-Damaged Trees

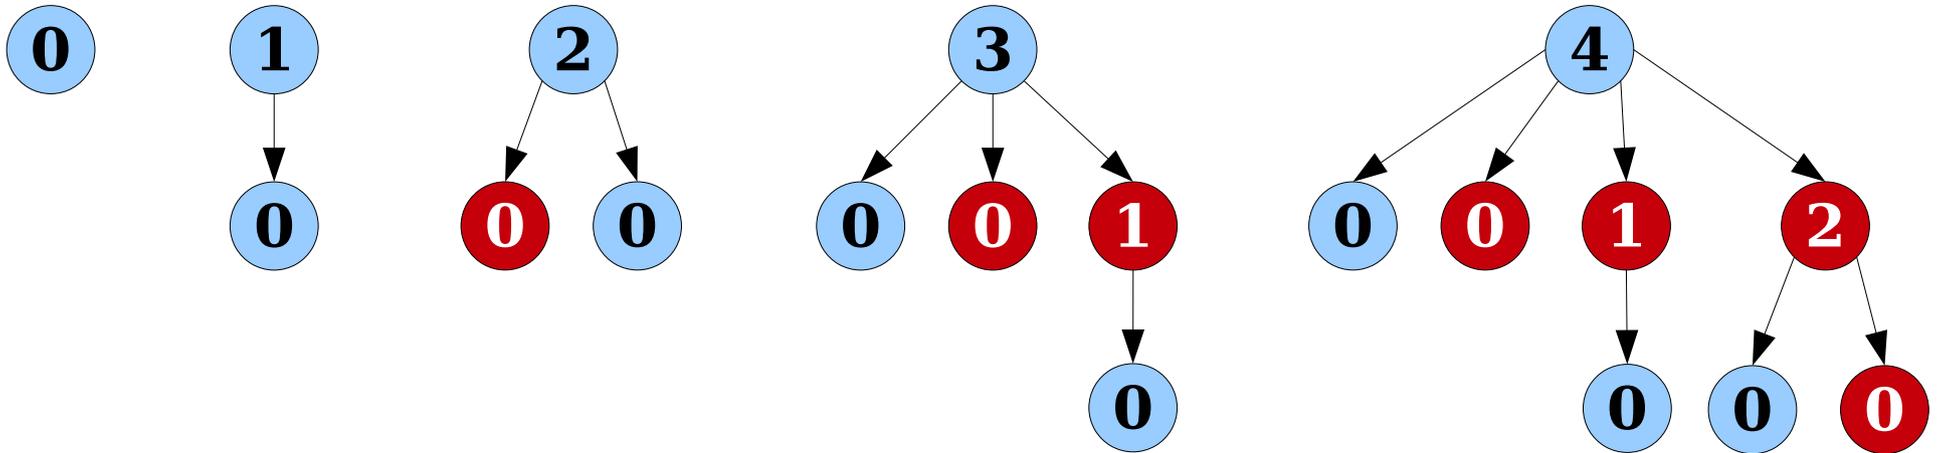


Maximally-Damaged Trees

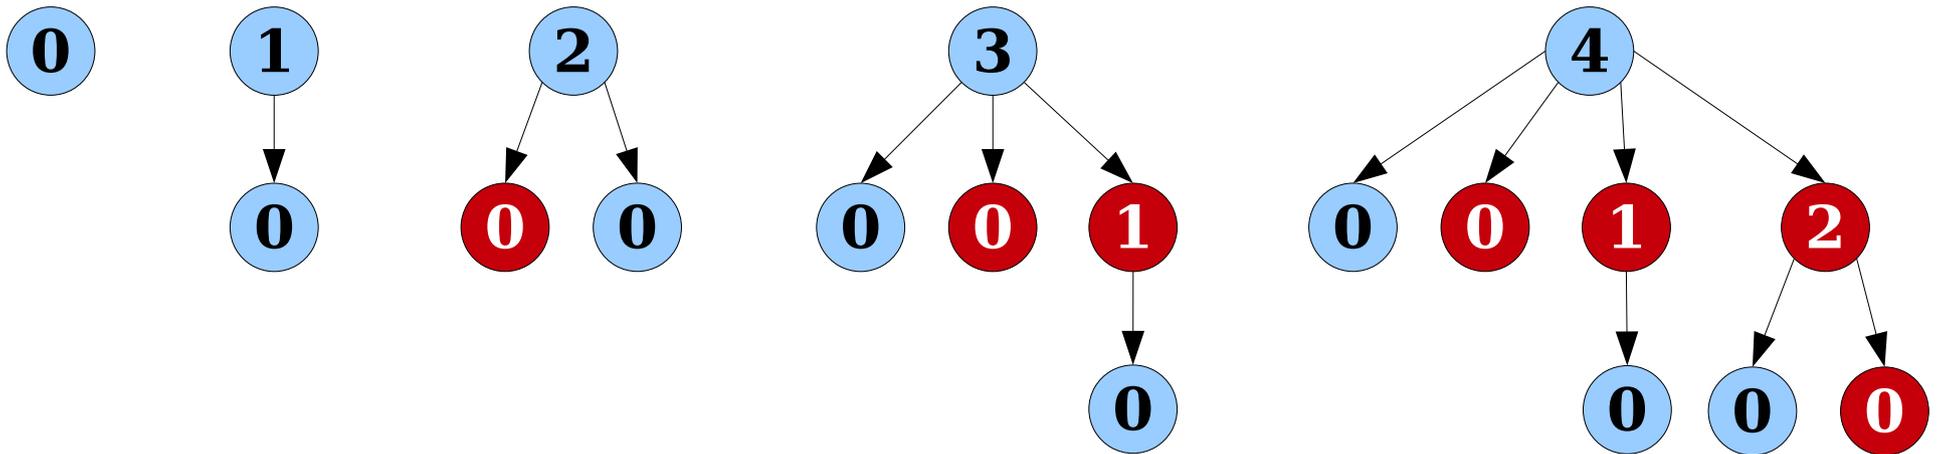


Maximally-Damaged Trees

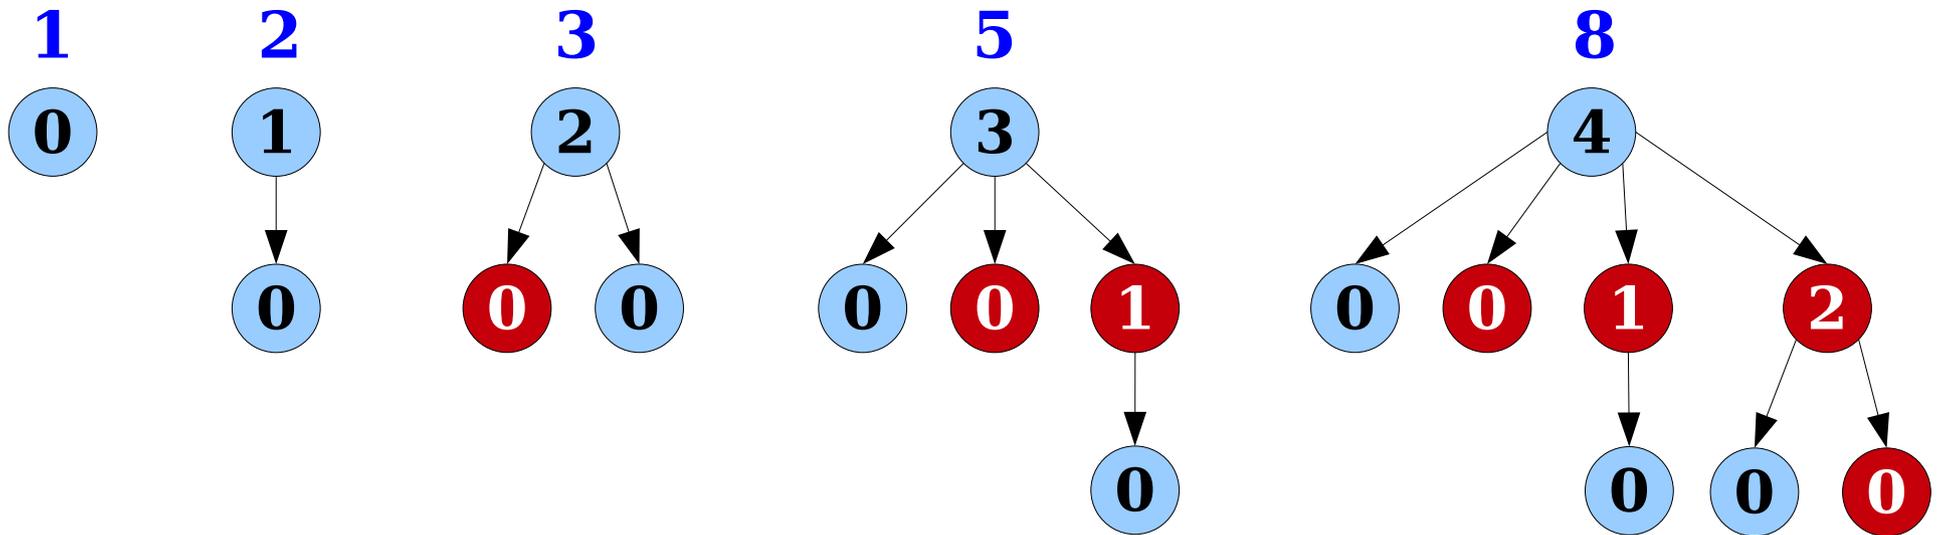

Maximally-Damaged Trees

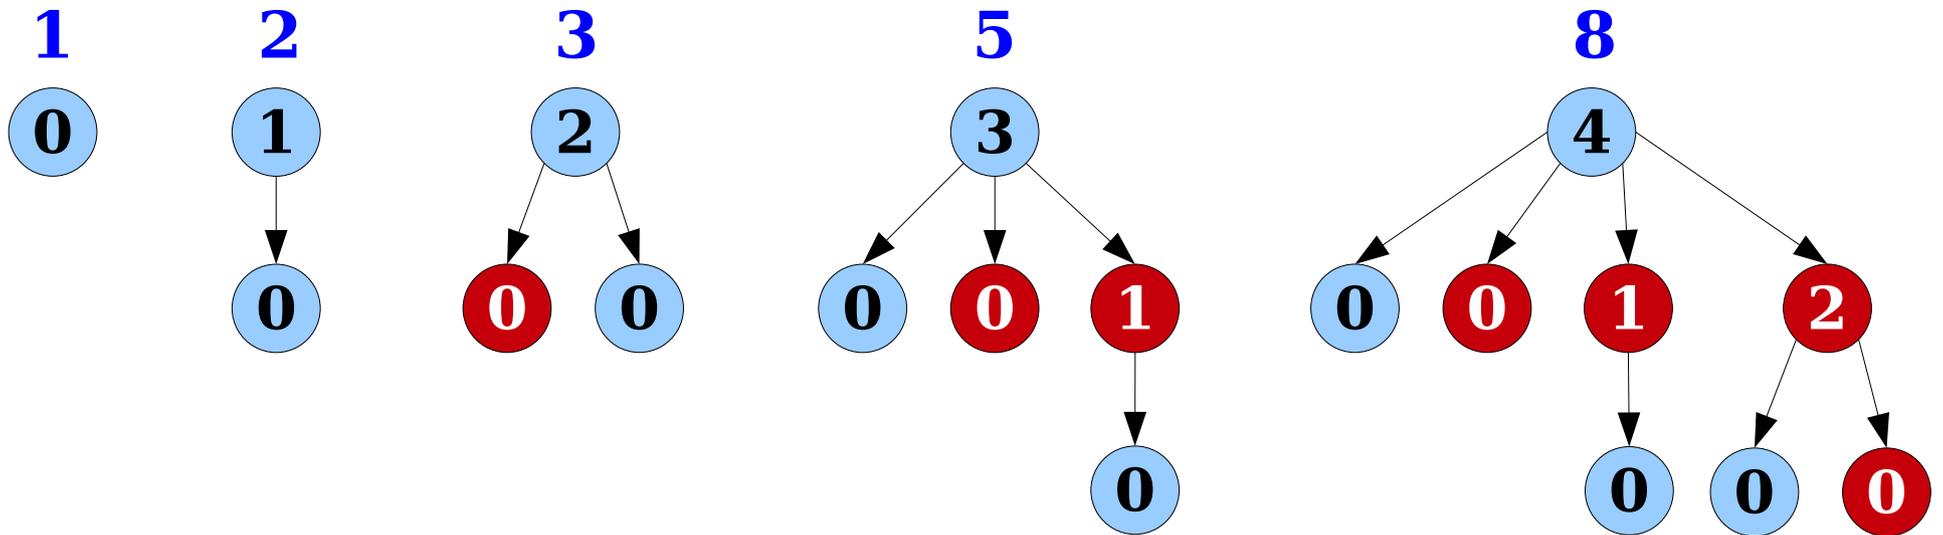

Claim: The minimum number of nodes in a tree of order k is F_{k+2}

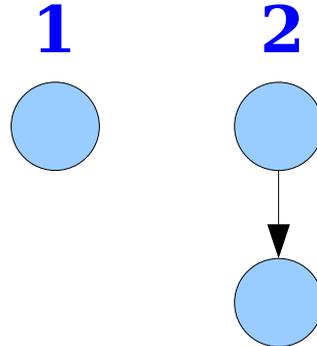


These trees are the base cases for our inductive line of reasoning.

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

A binomial tree
of order $k+2$.


What's the maximum amount of
damage we can do to this tree
without cutting any of the direct
children of the root?

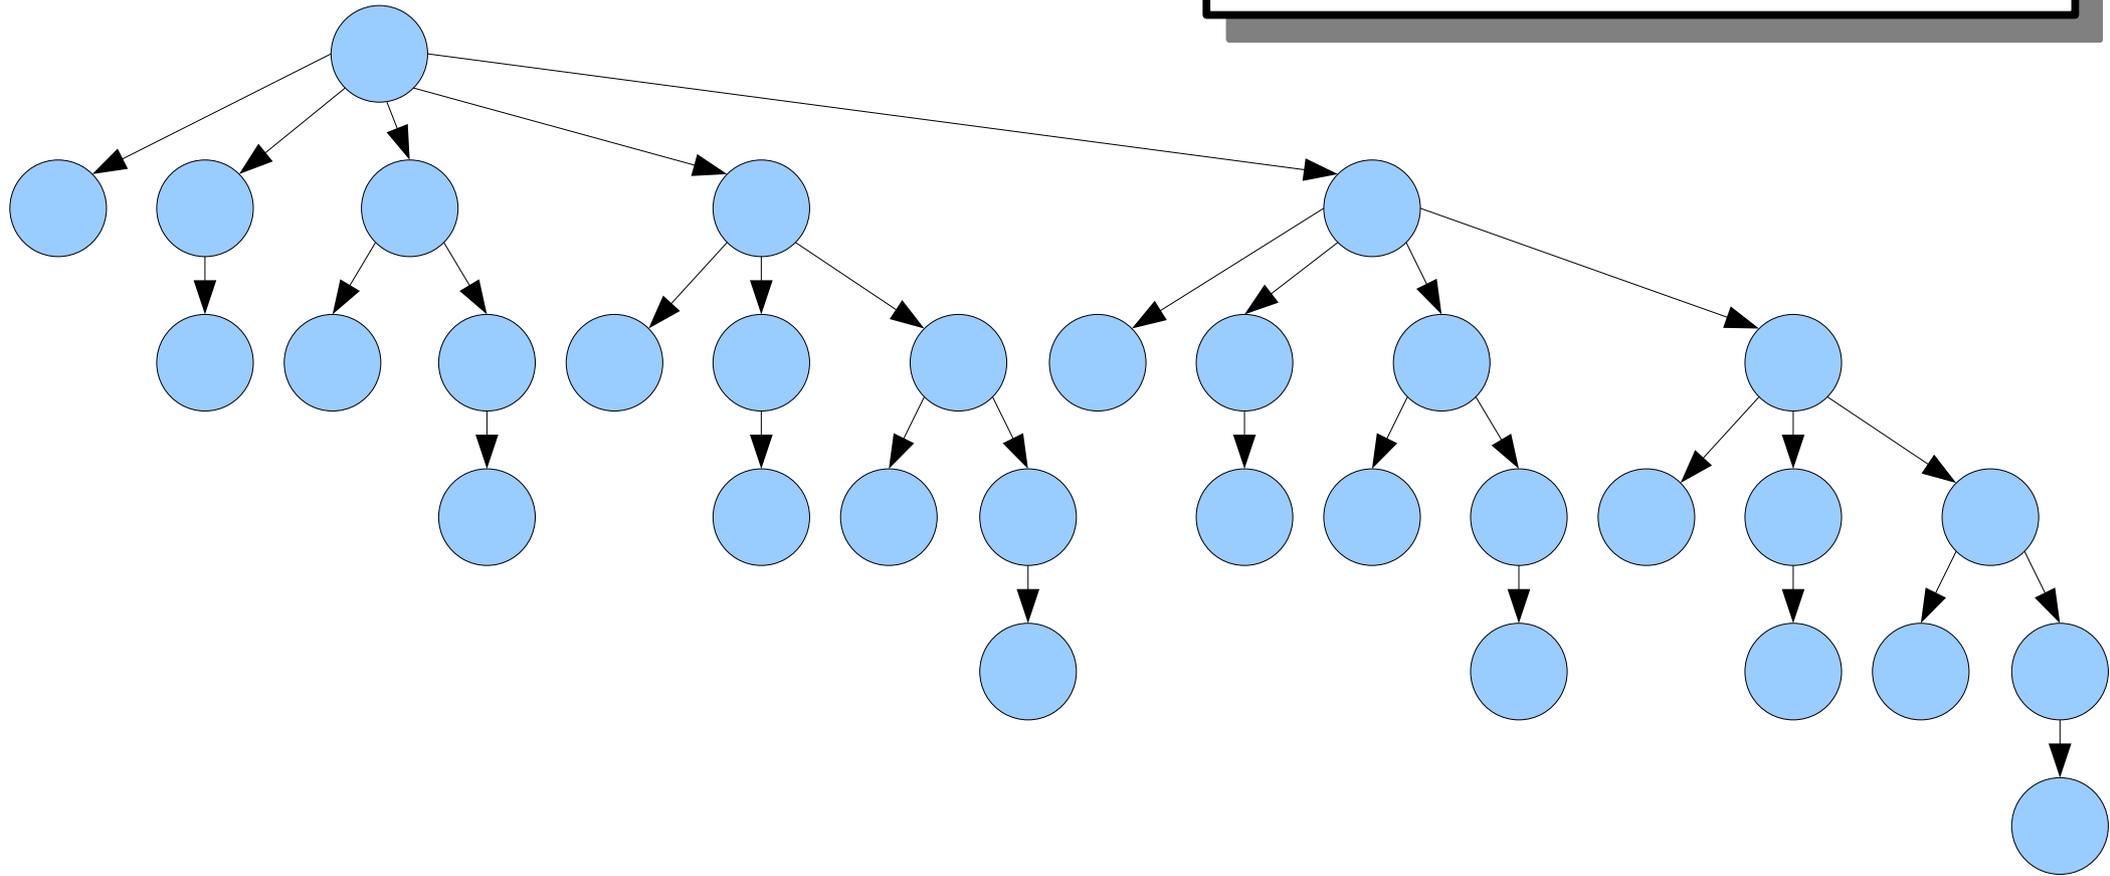

Theorem: The minimum number of
nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

A binomial tree
of order $k+2$.

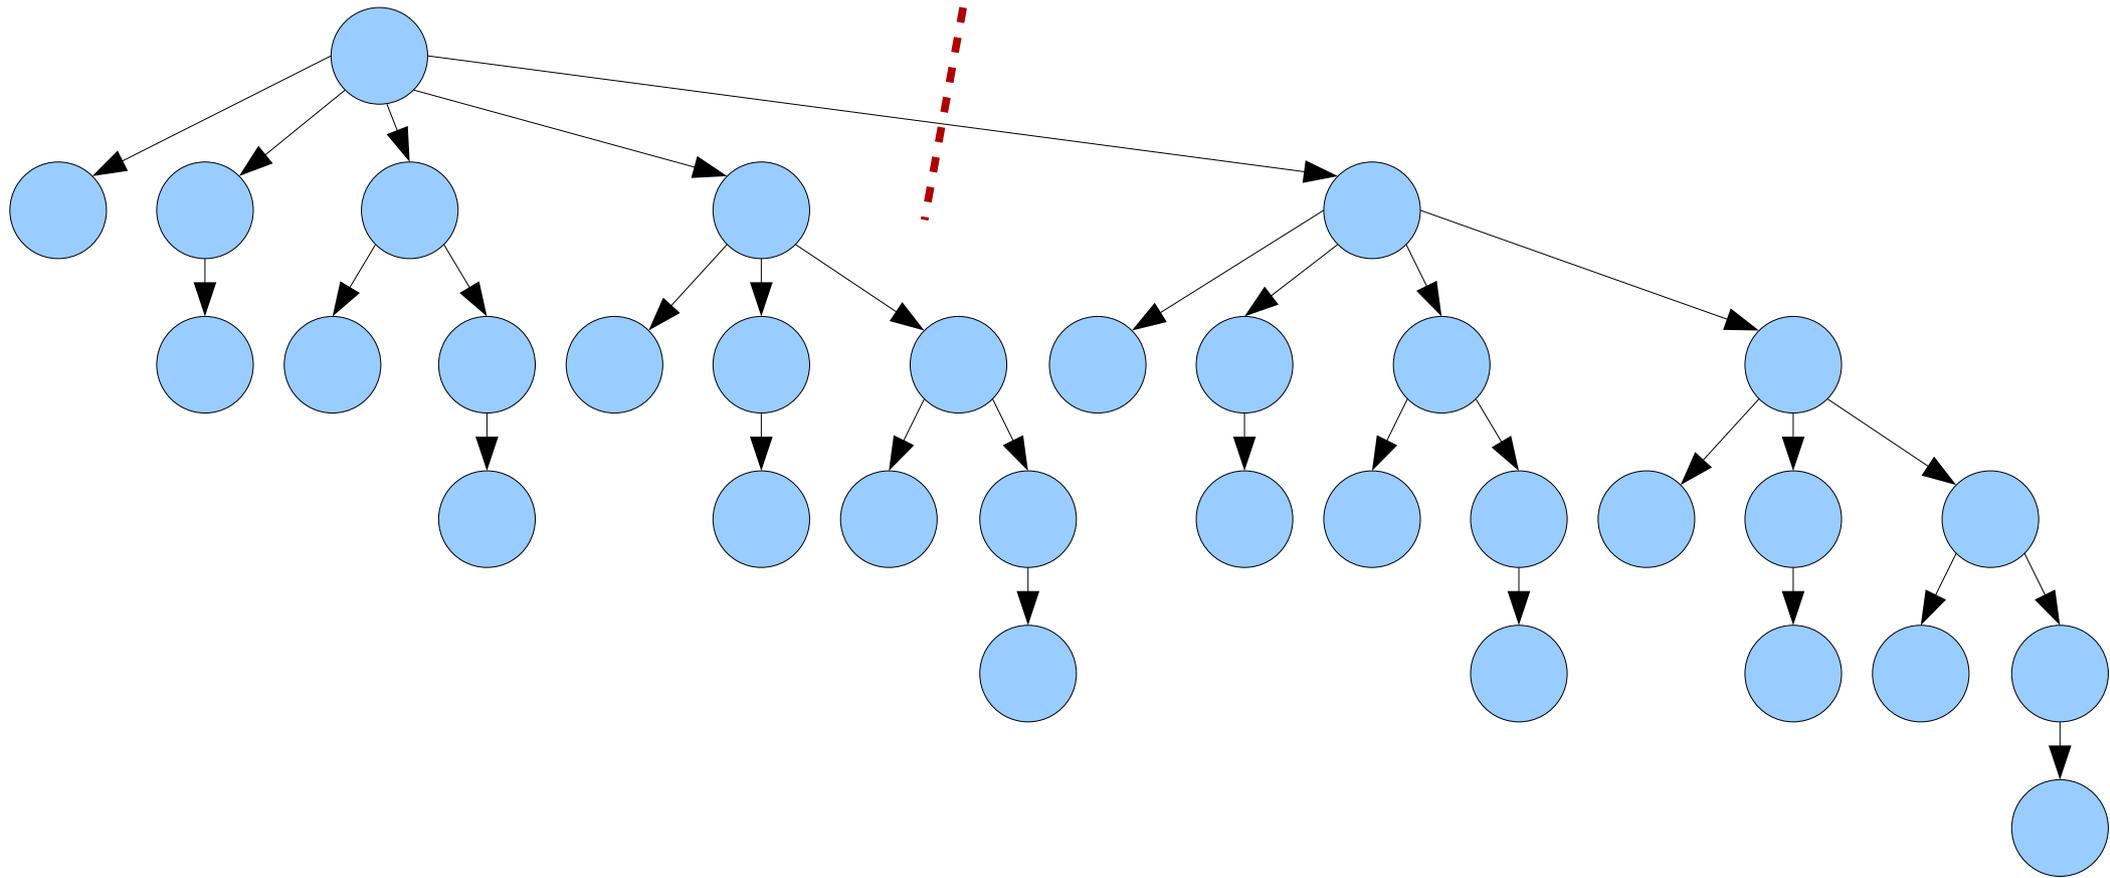


Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

A binomial tree
of order $k+1$.

A binomial tree
of order $k+1$.

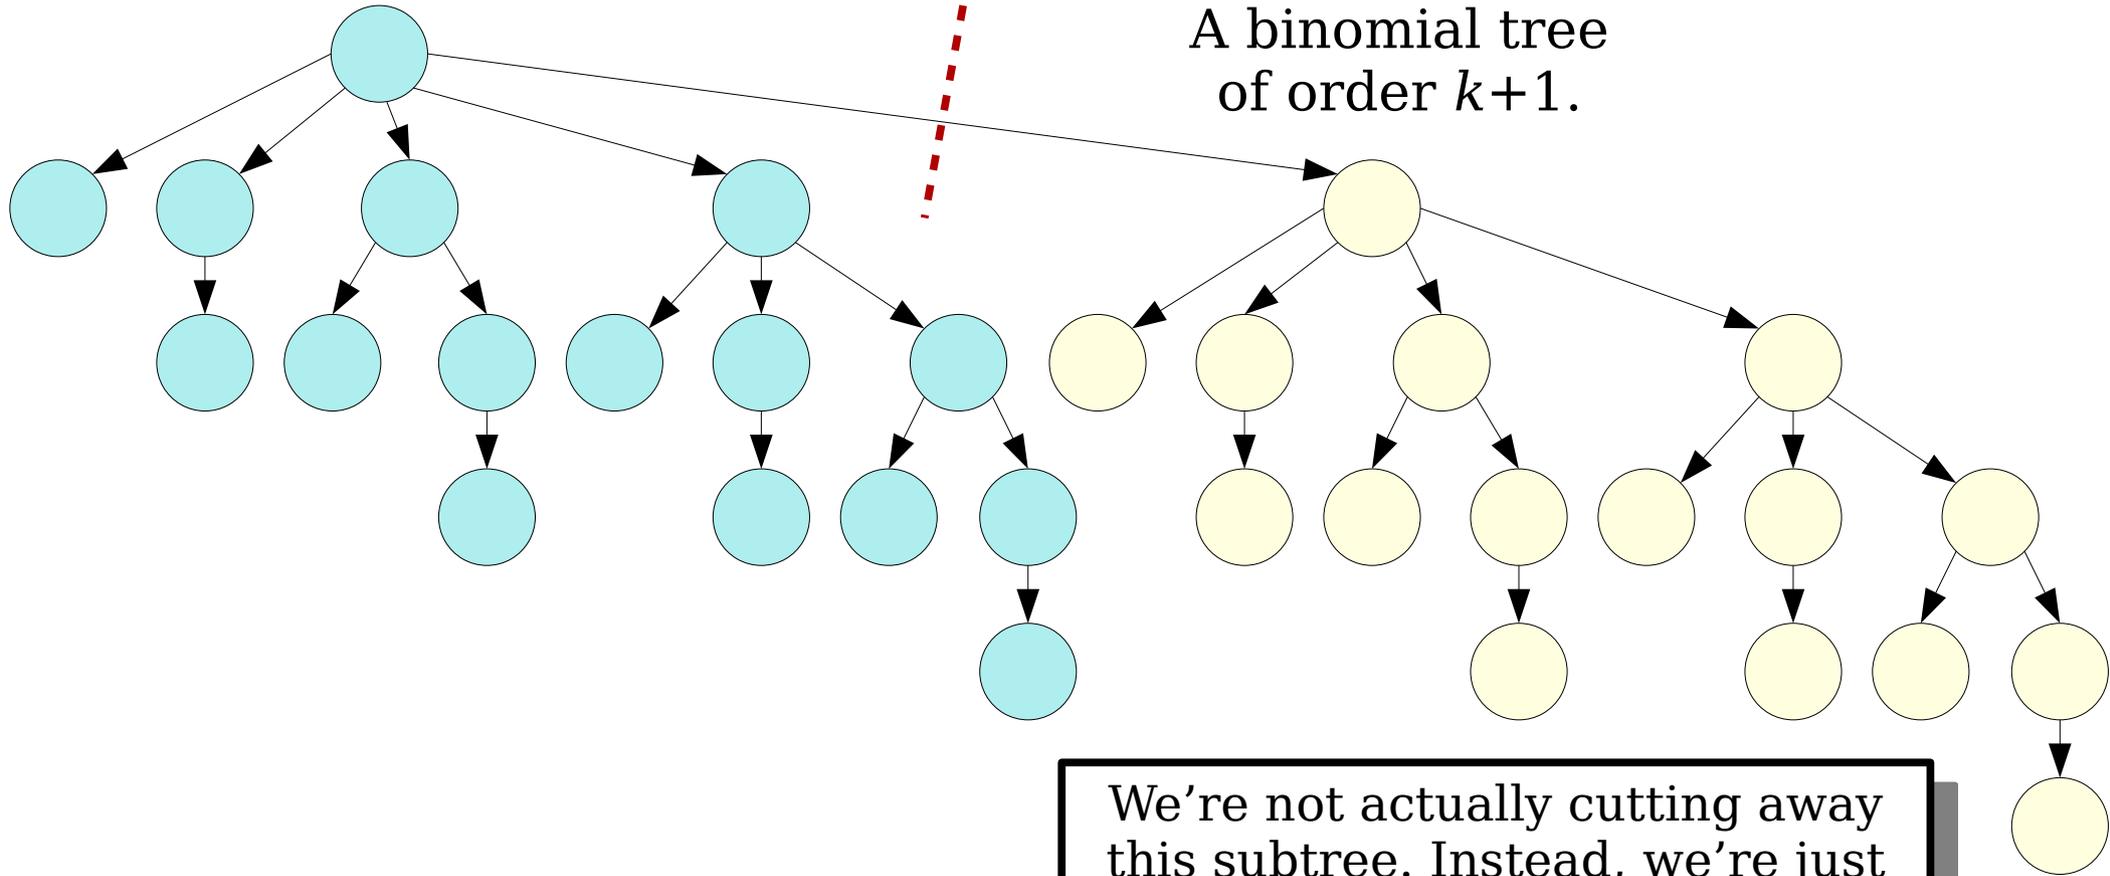


We're not actually cutting away
this subtree. Instead, we're just
separating it for accounting
purposes.

Theorem: The minimum number of
nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!



A binomial tree
of order $k+1$.

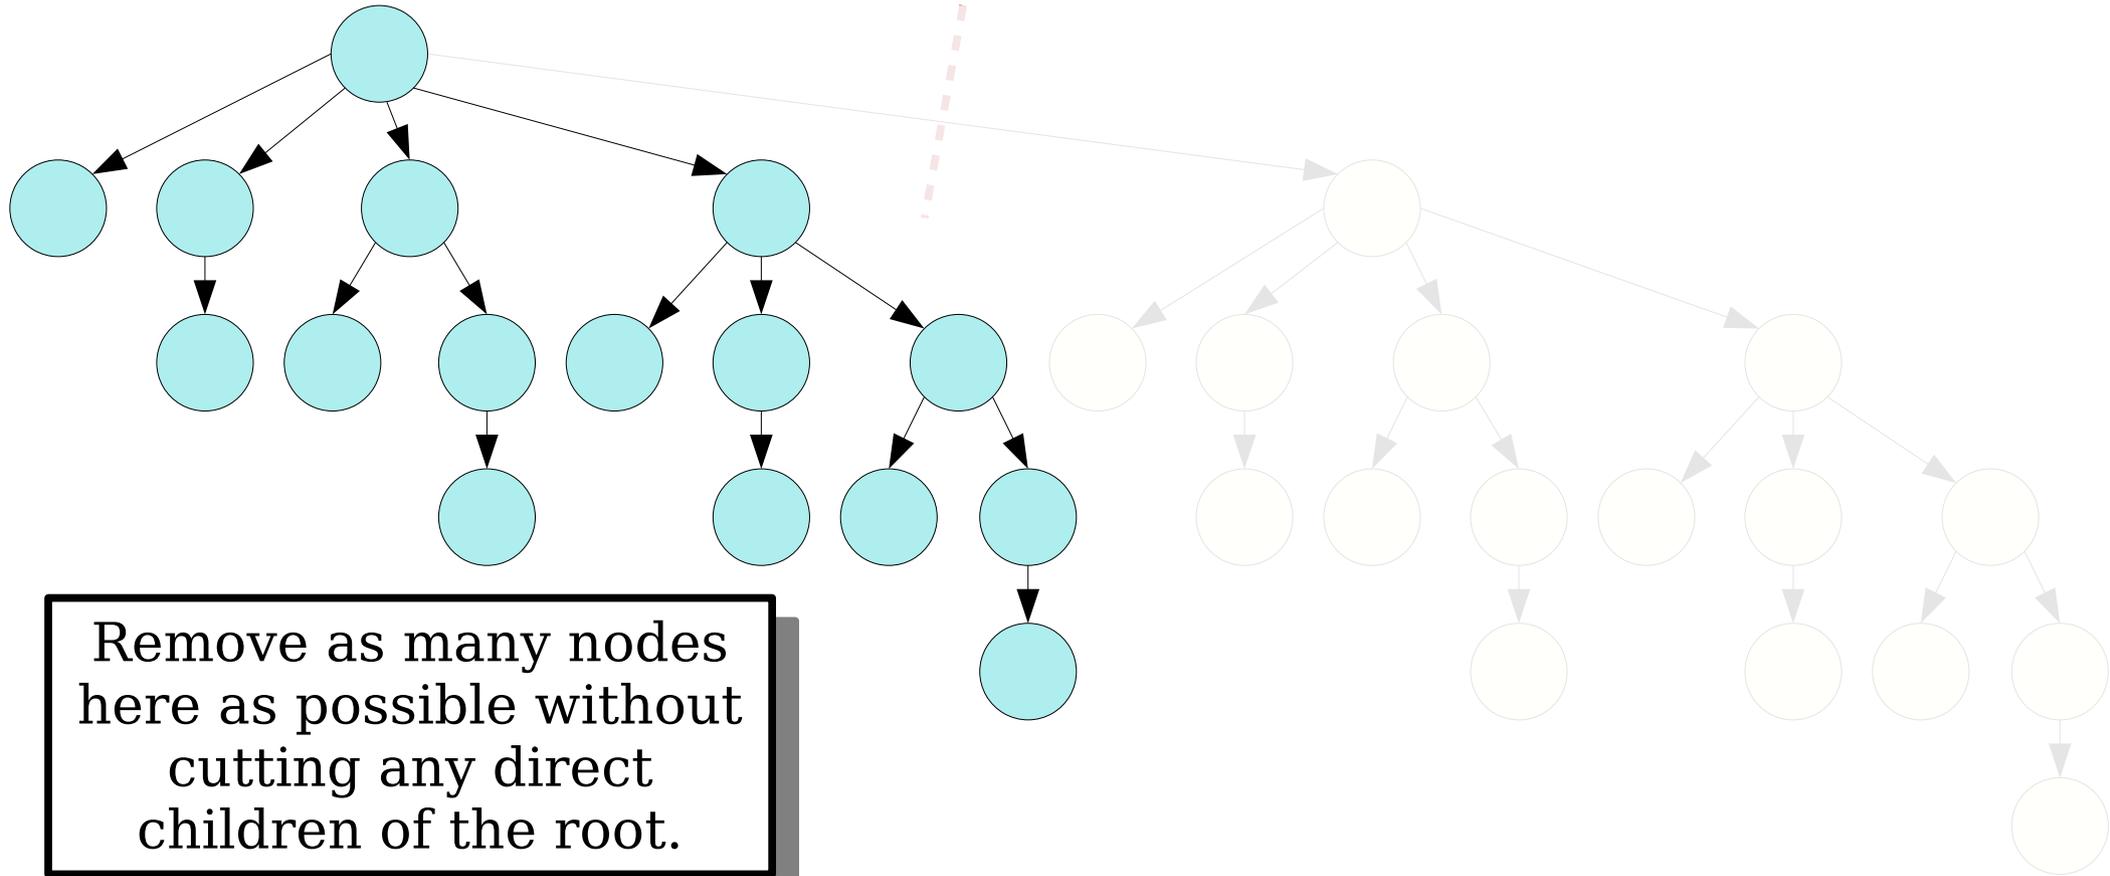

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

A (former)
binomial tree of
order $k+1$.

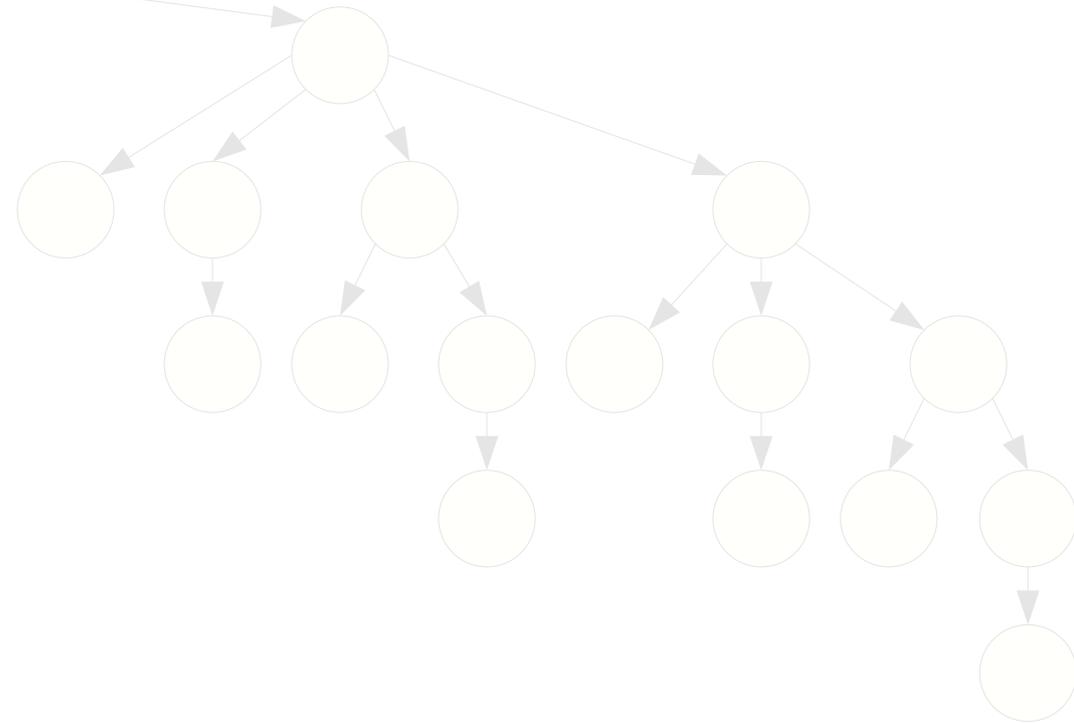
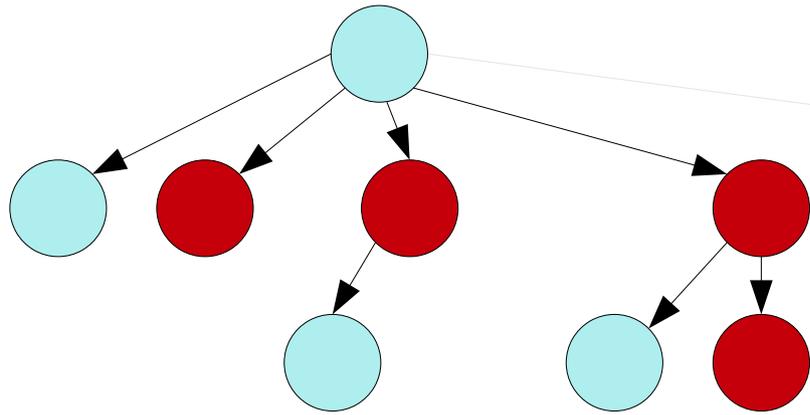


Remove as many nodes
here as possible without
cutting any direct
children of the root.

Theorem: The minimum number of
nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!


A (former)
binomial tree of
order $k+1$.

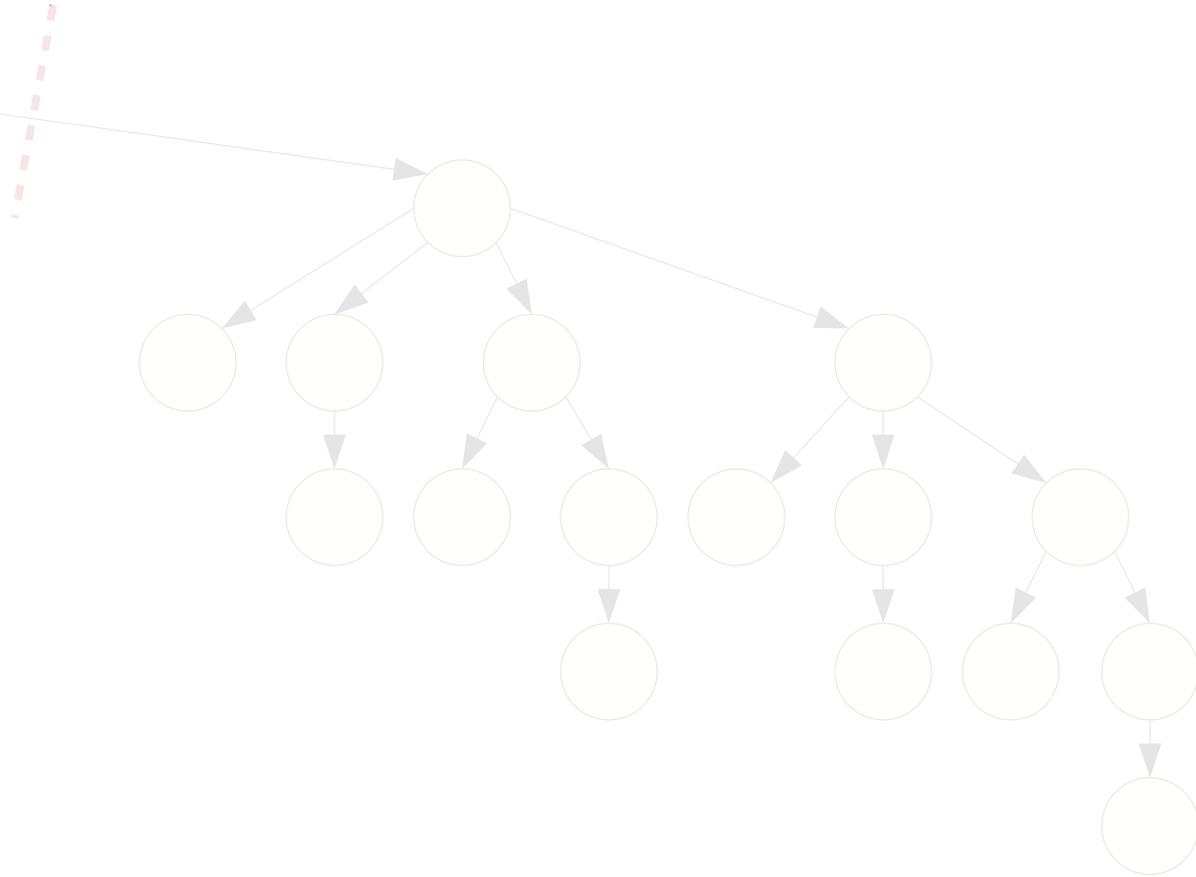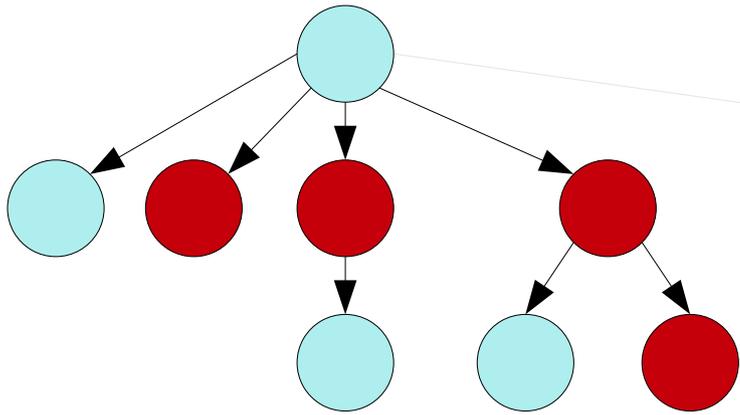

Remove as many nodes here as possible without cutting any direct children of the root.


Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

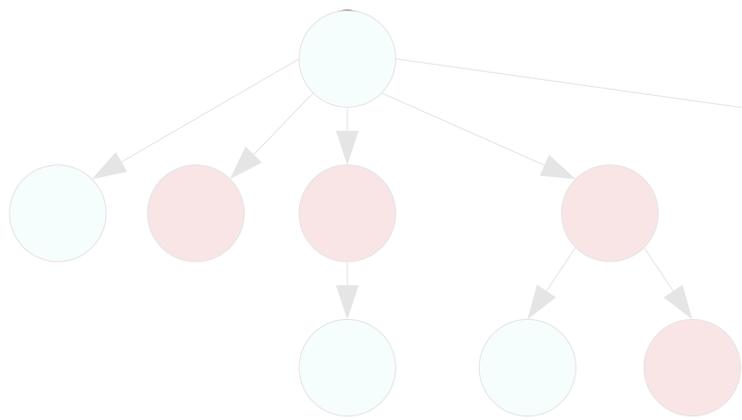

A maximally-damaged tree of order $k+1$.


A binomial tree of order $k+1$.

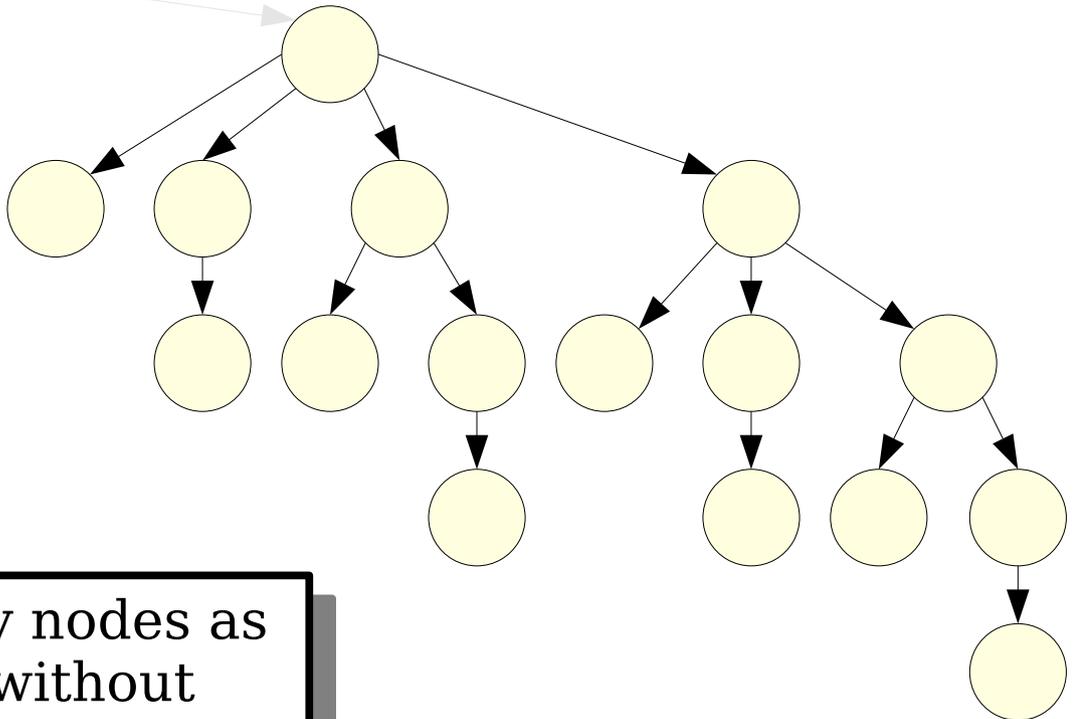

Cut as many nodes as possible without cutting more than two children from the root.

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .


Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

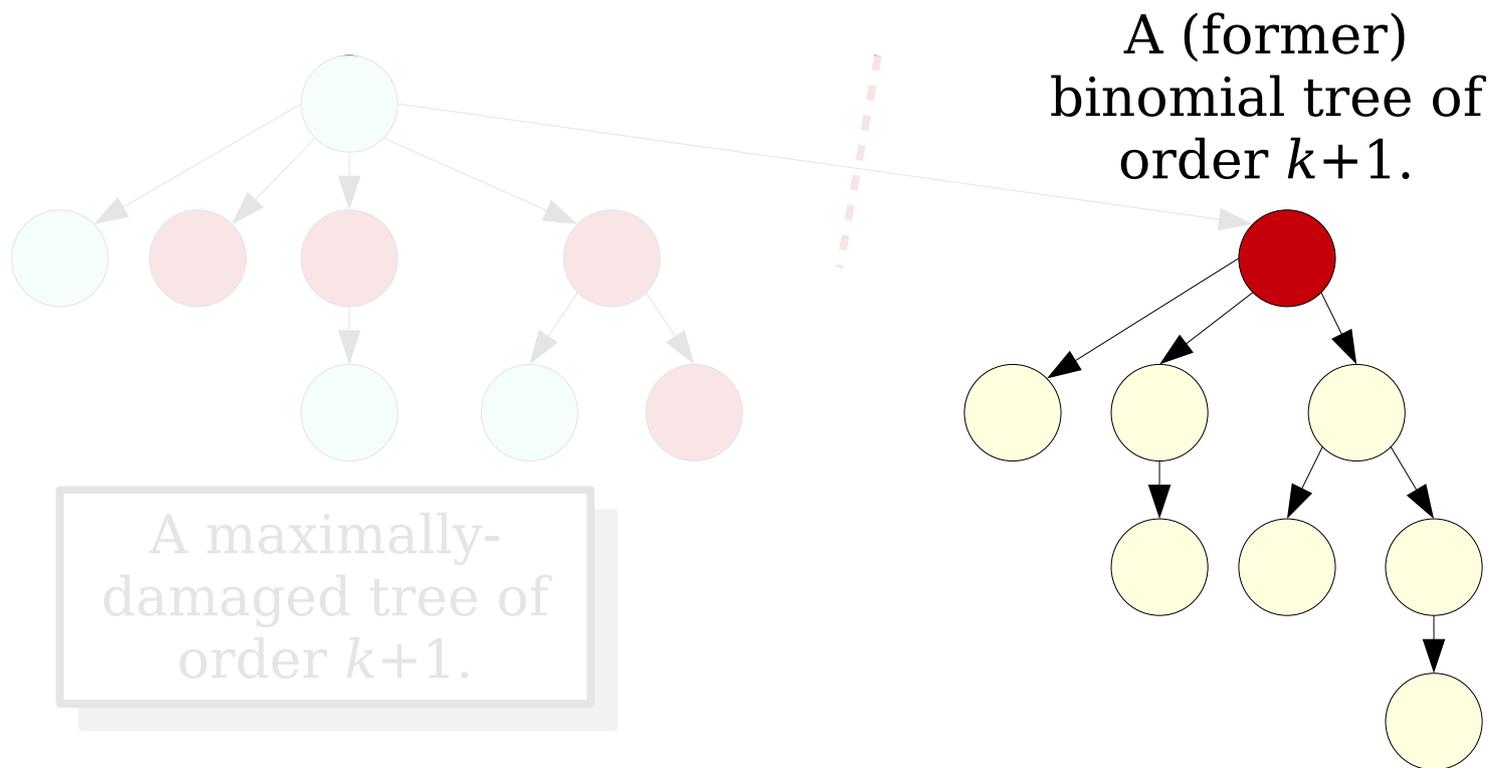

Cut as many nodes as possible without cutting more than two children from the root.

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .


Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

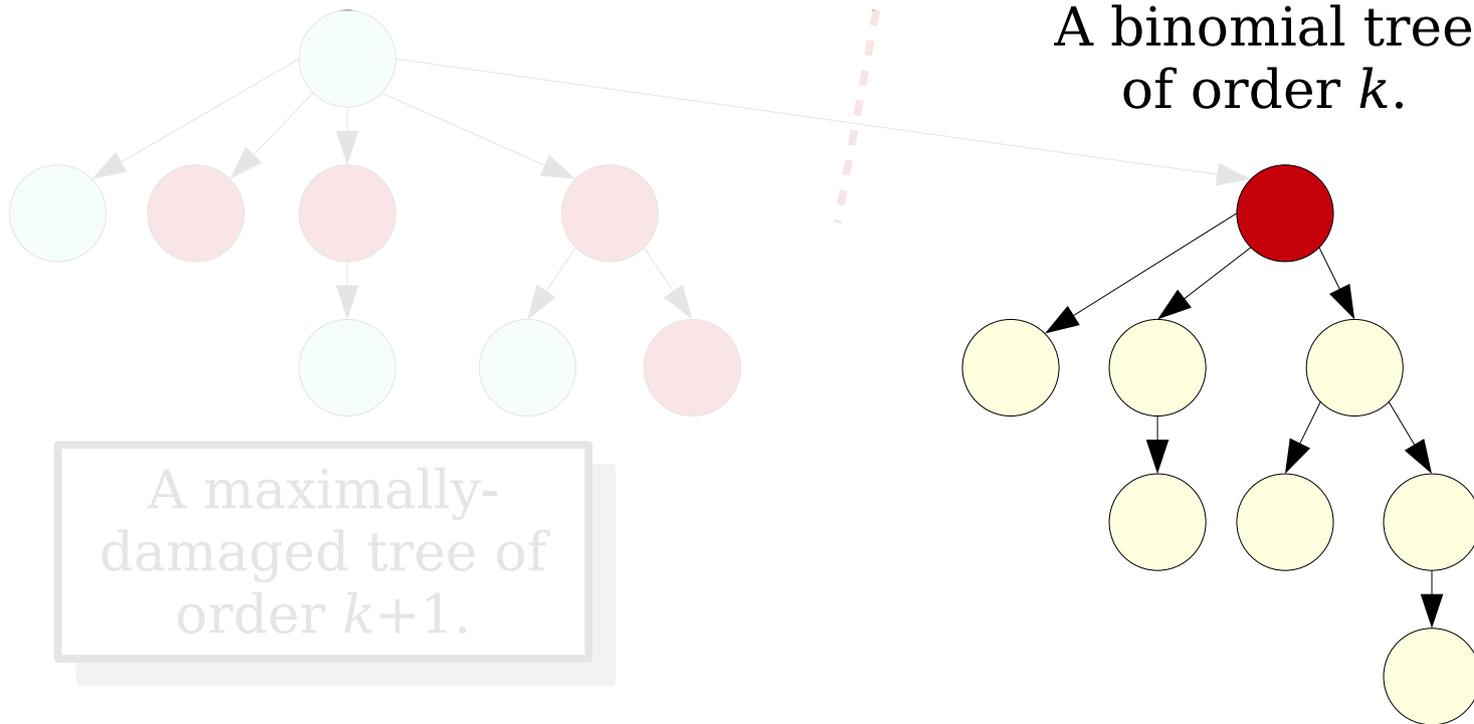

Cut as many nodes as possible without cutting more than two children from the root.

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .


Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

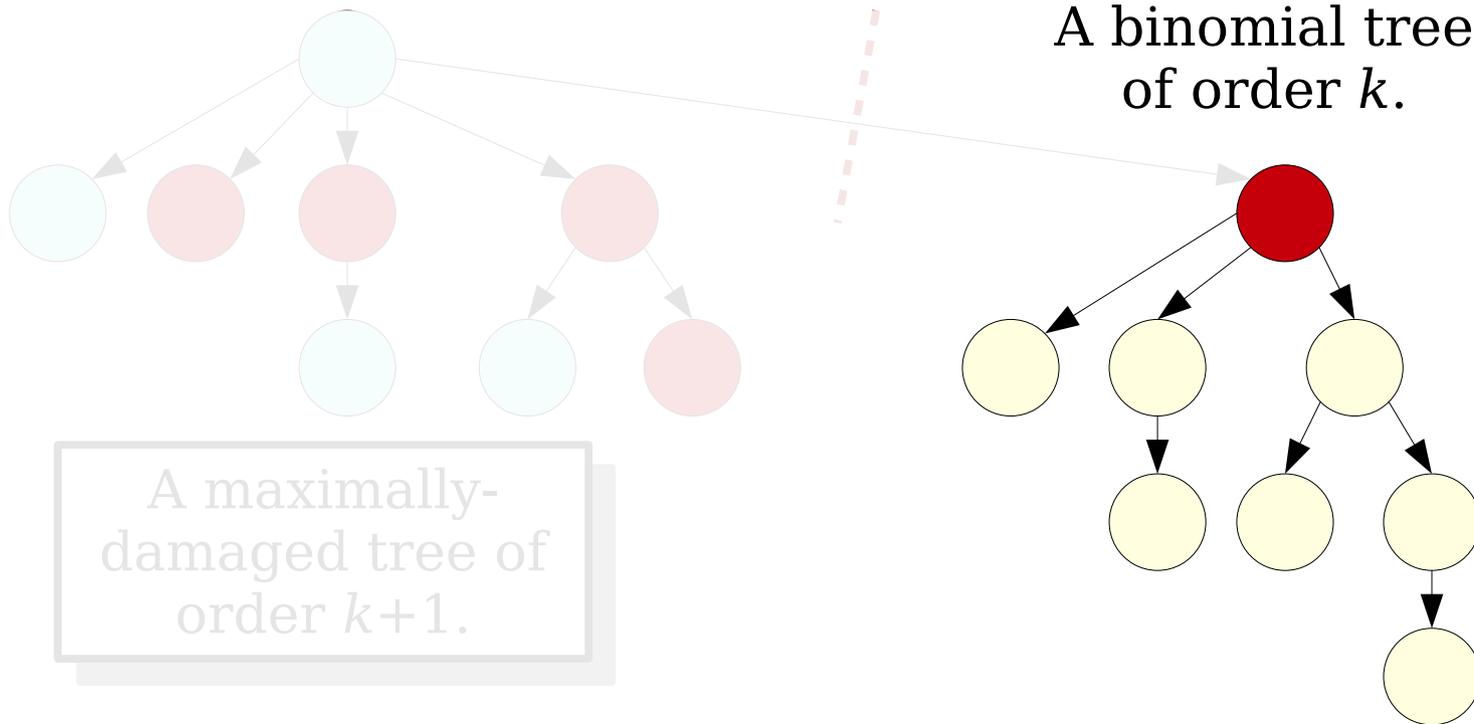

Cut away as many nodes as possible without cutting any children of the root.

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .


Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

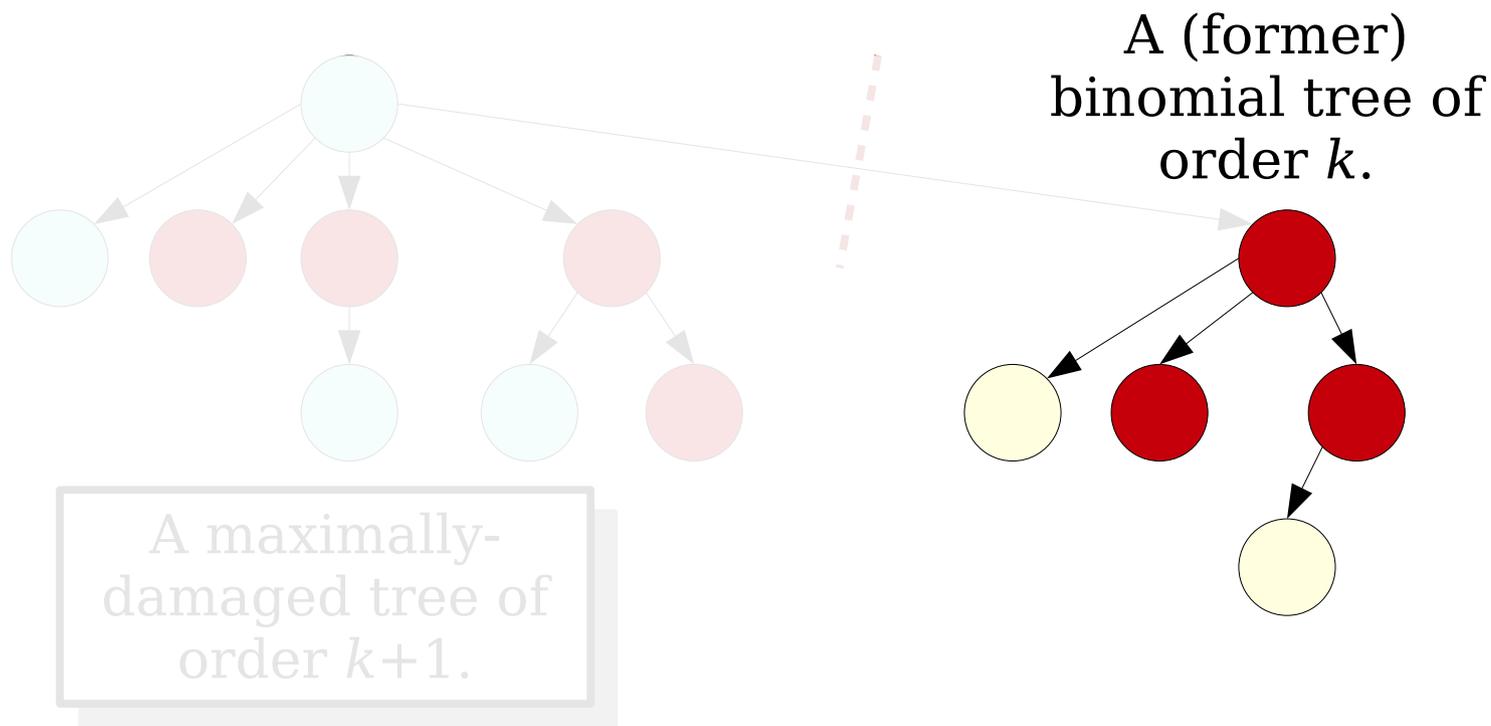

Cut away as many nodes as possible without cutting any children of the root.

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .


Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

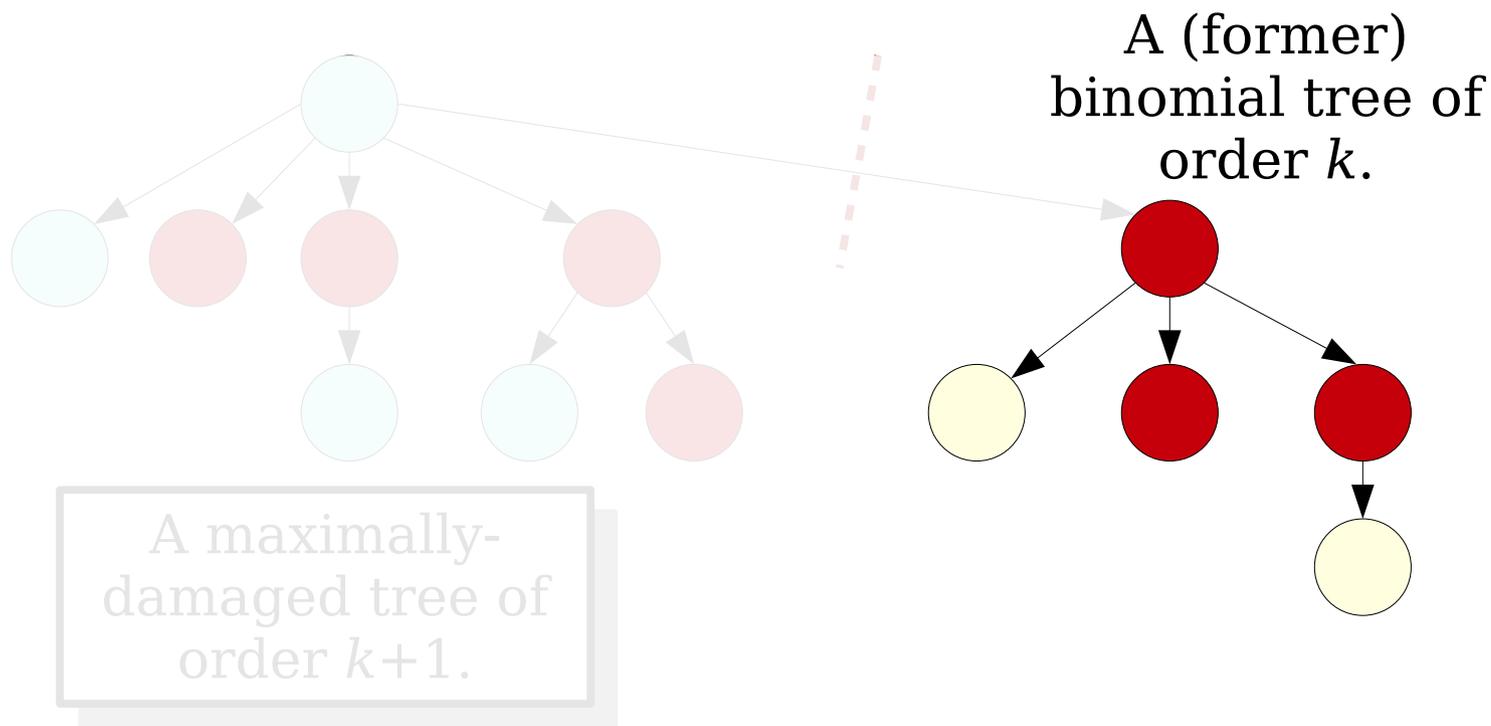

Cut away as many nodes as possible without cutting any children of the root.


Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

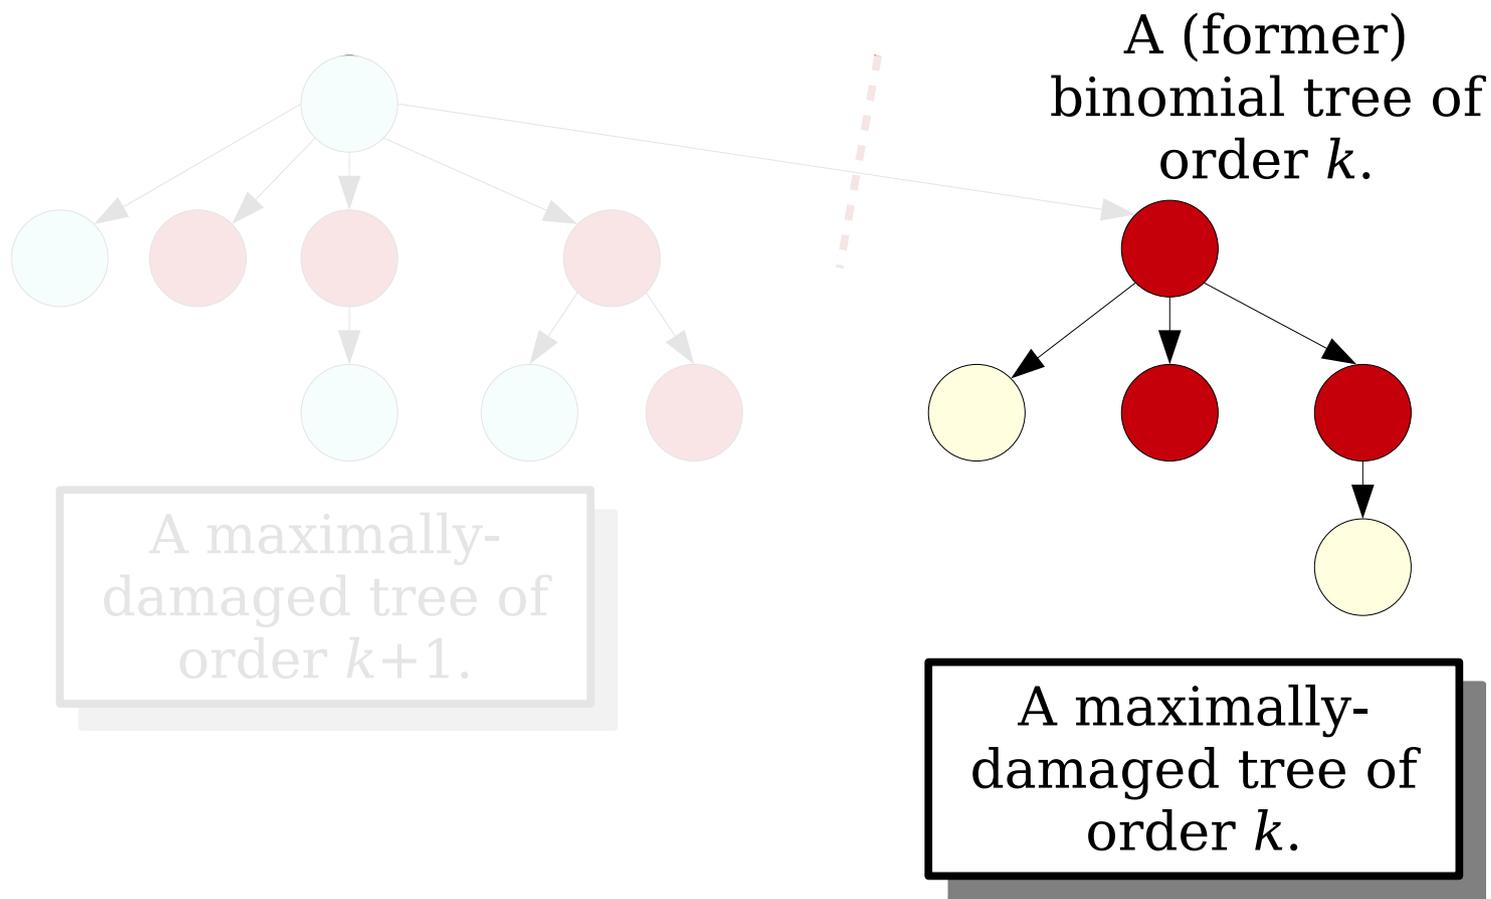


Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

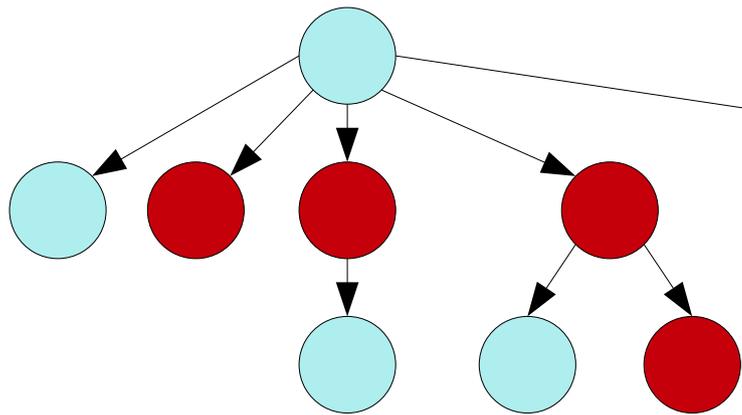

A maximally-damaged tree of order $k+1$.

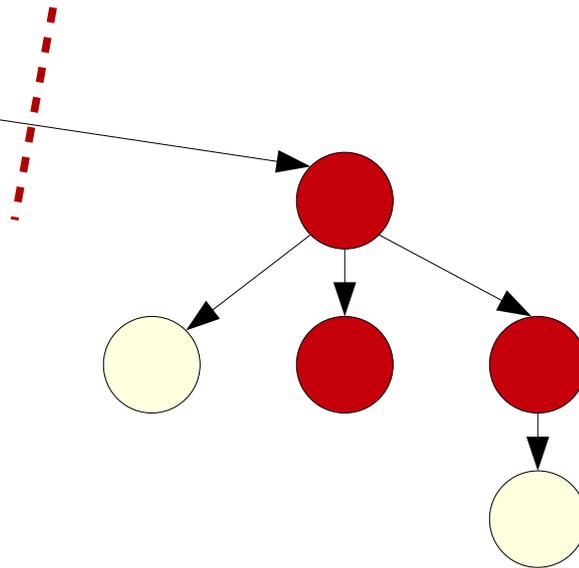

A maximally-damaged tree of order k .

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!

Fact: $F_k = \Theta(\varphi^k)$, where

$$\varphi = \frac{1 + \sqrt{5}}{2}$$

is the golden ratio.

Corollary: The number of nodes in a tree of order k grows exponentially with k (approximately 1.61^k versus our previous 2^k).

Theorem: The minimum number of nodes in a tree of order k is F_{k+2} .

Thanks to former CS166ers Kevin Tan and Max Arseneault for this proof approach!


A ***Fibonacci heap*** is a lazy binomial heap with ***decrease-key*** implemented using the “lose at most one child” marking scheme.

How fast are the operations
on Fibonacci heaps?

$$\Phi = t$$

where

t is the number of trees.

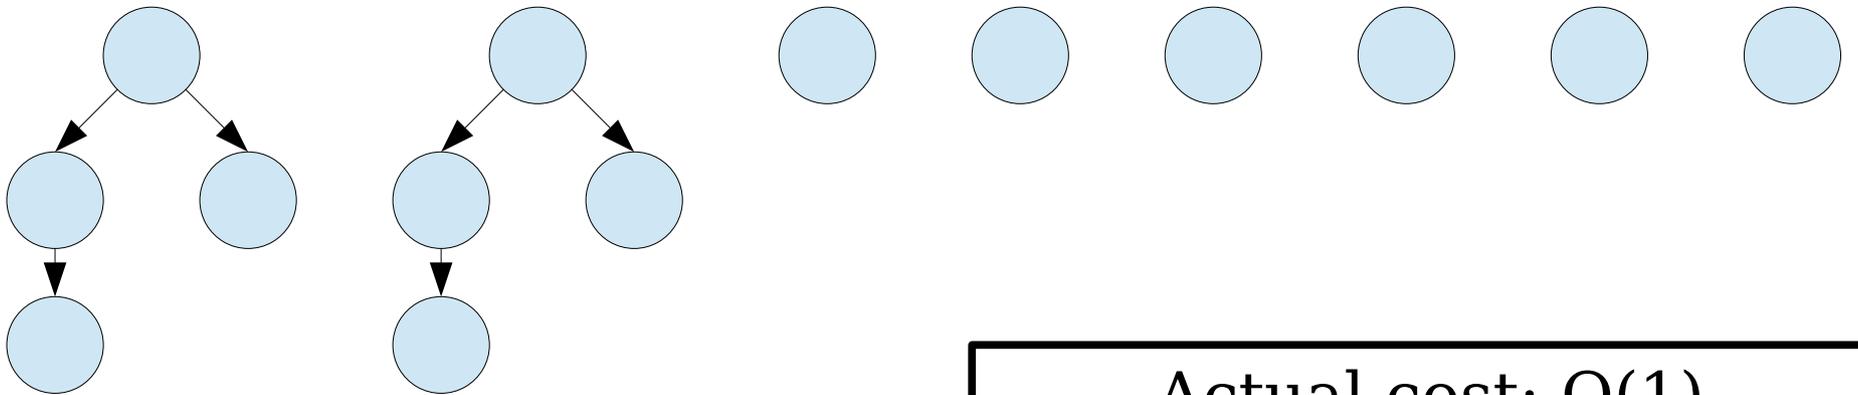

Actual cost: $O(1)$

$\Delta\Phi$: $+1$


Amortized cost: **$O(1)$** .

Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

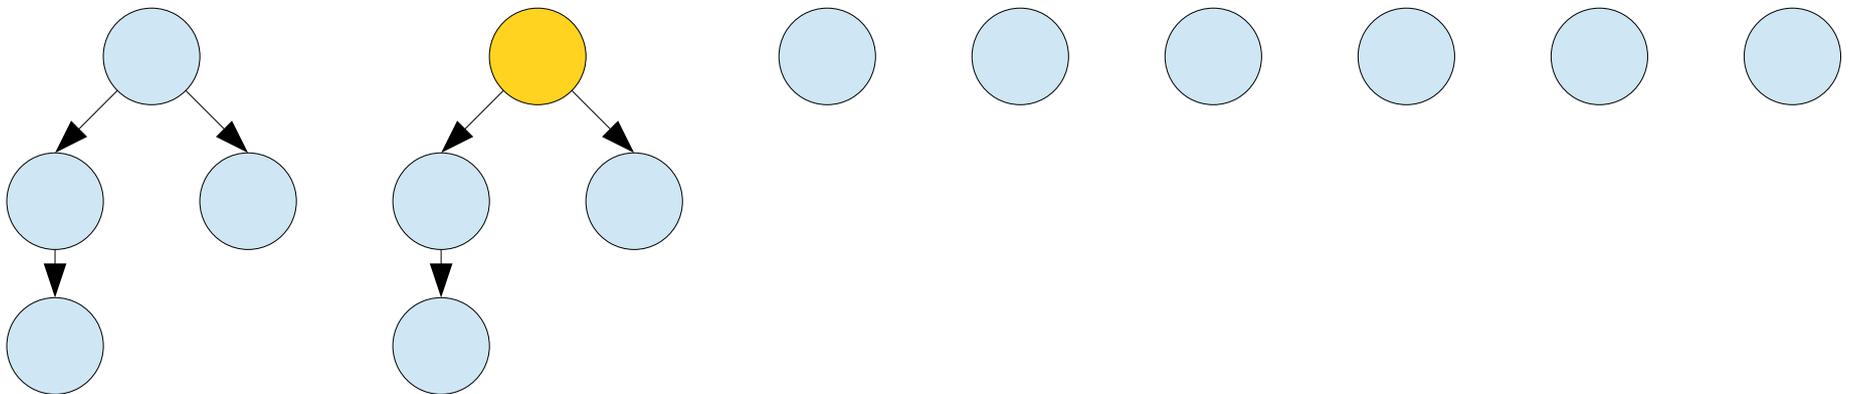


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

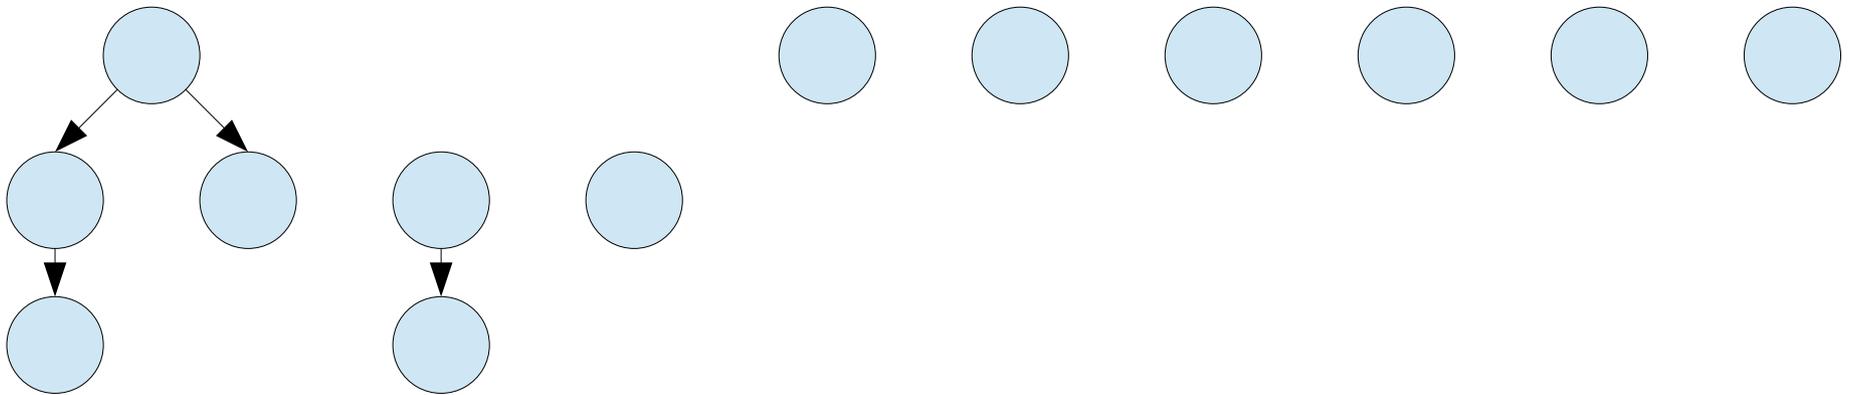


Each **enqueue** slowly introduces trees.
Each **extract-min** rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

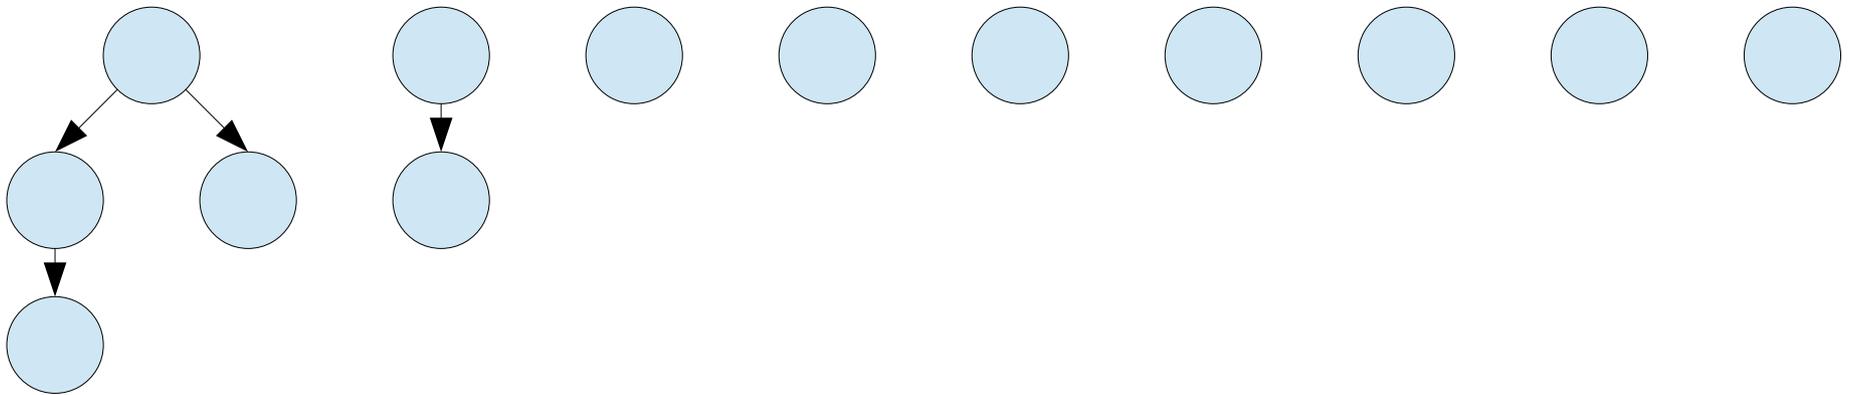


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

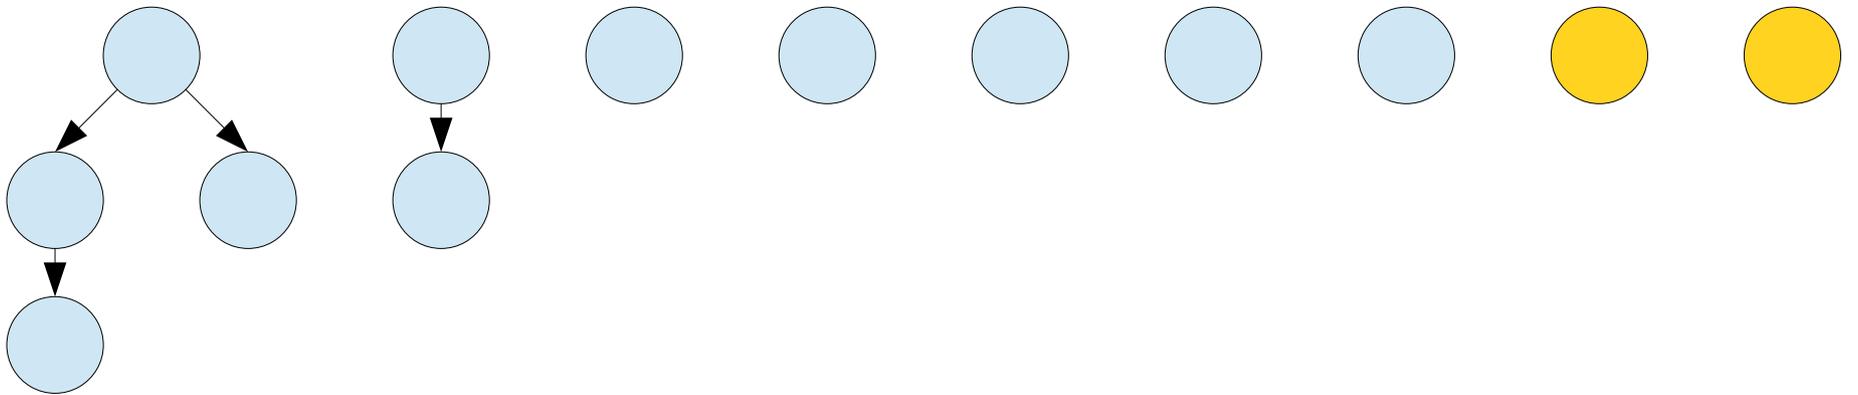


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

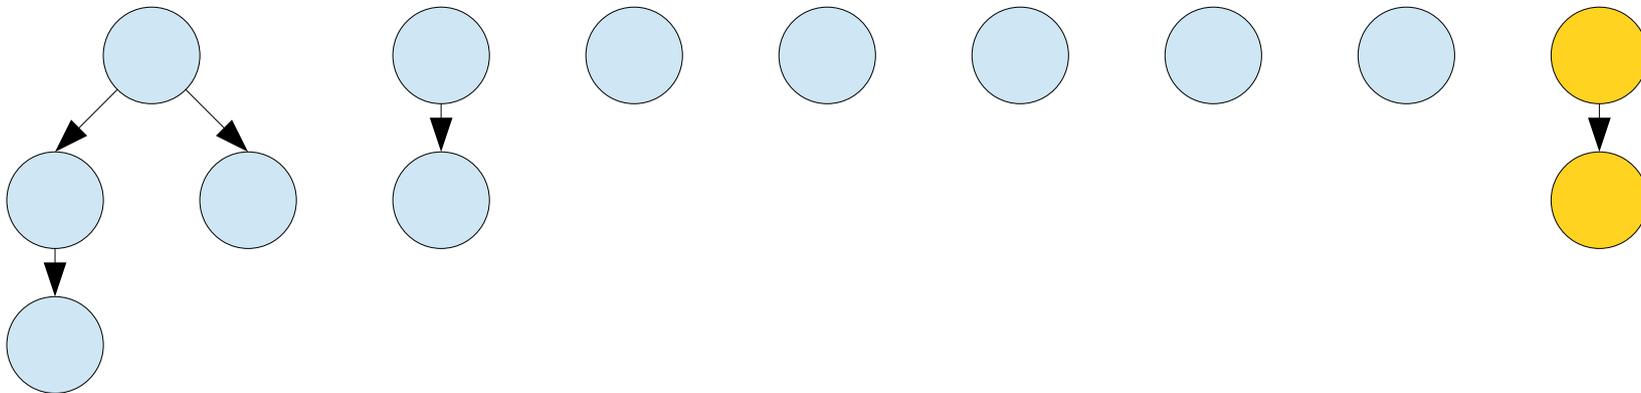


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

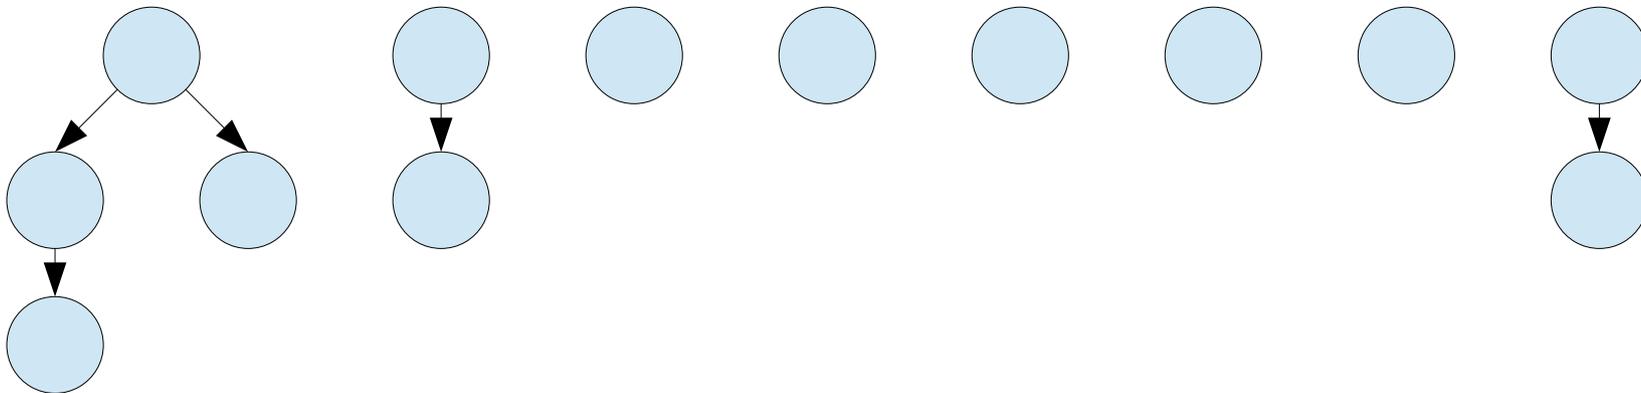


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

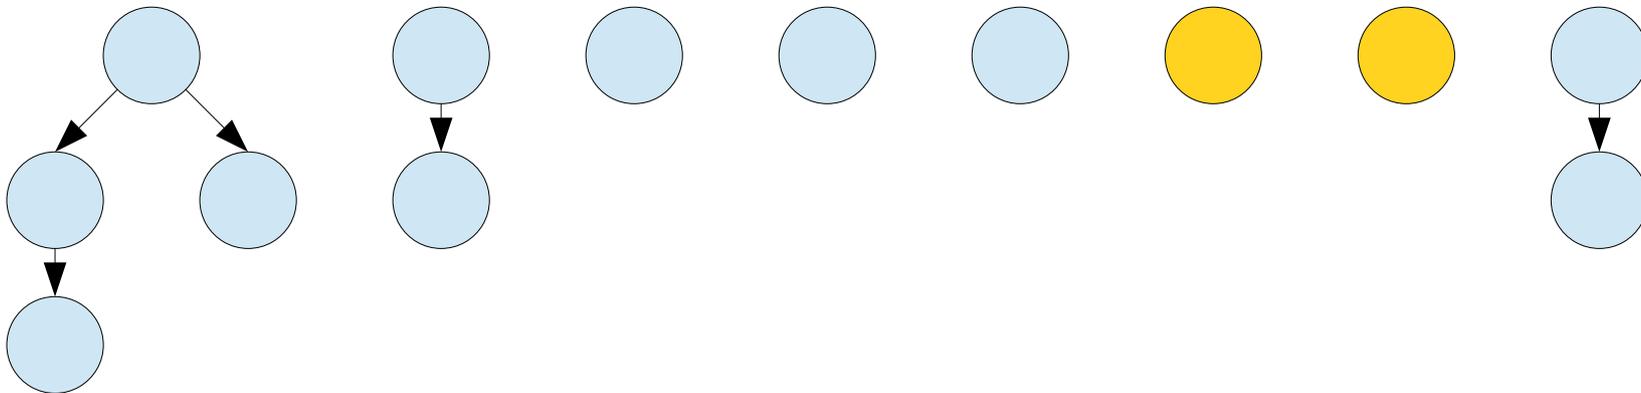


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

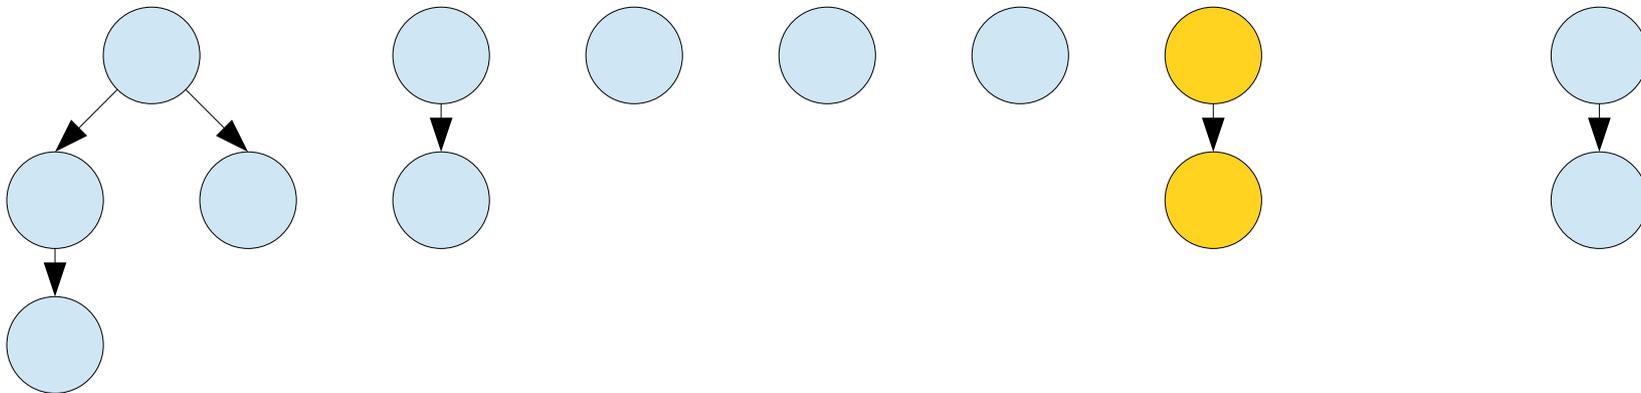


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

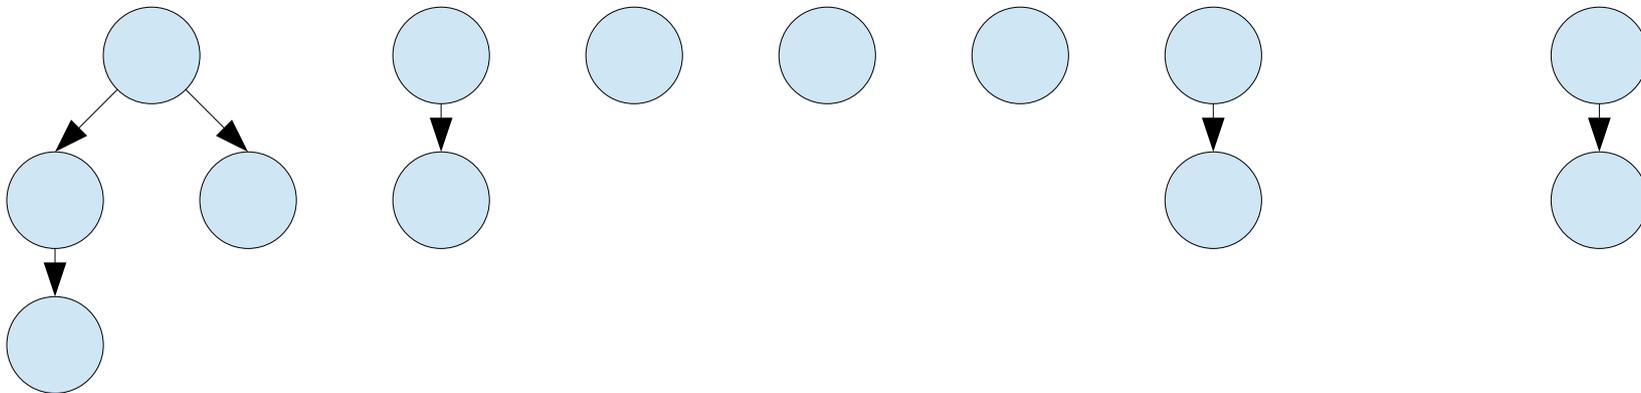


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

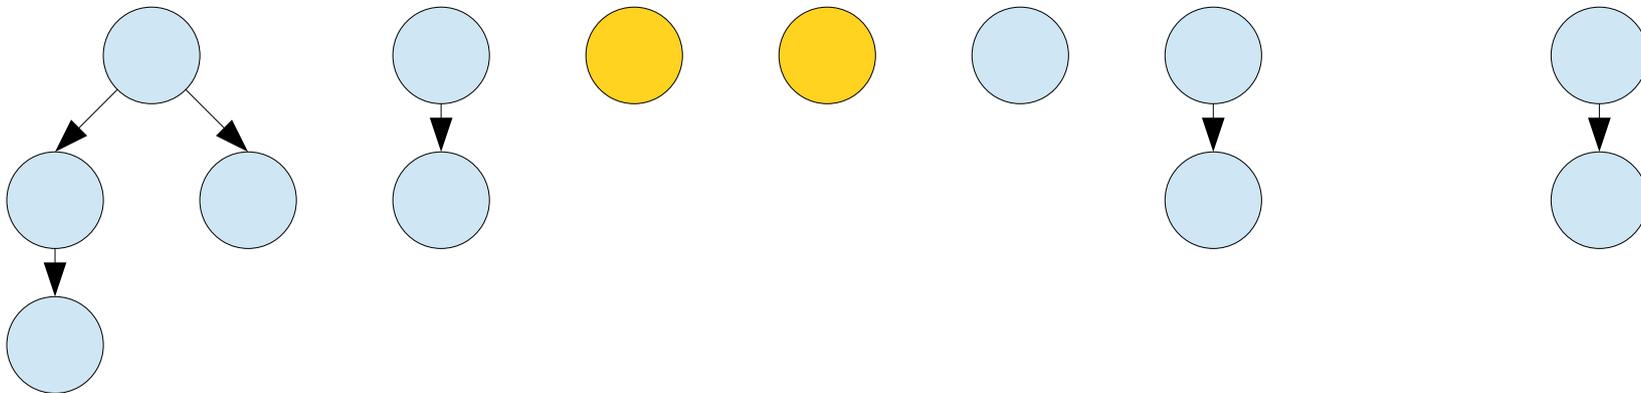


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

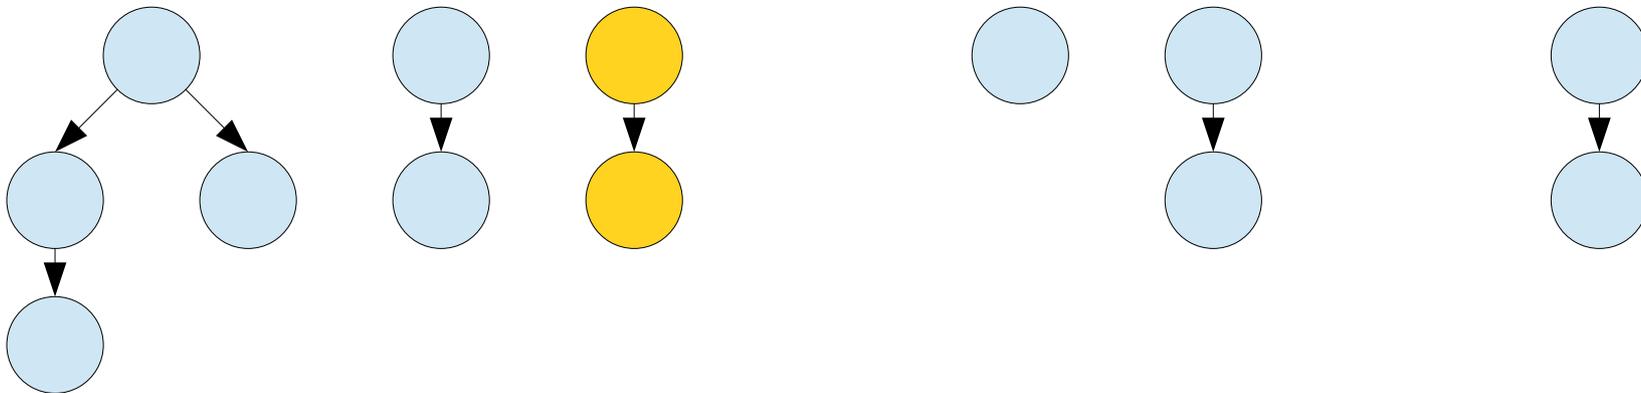


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

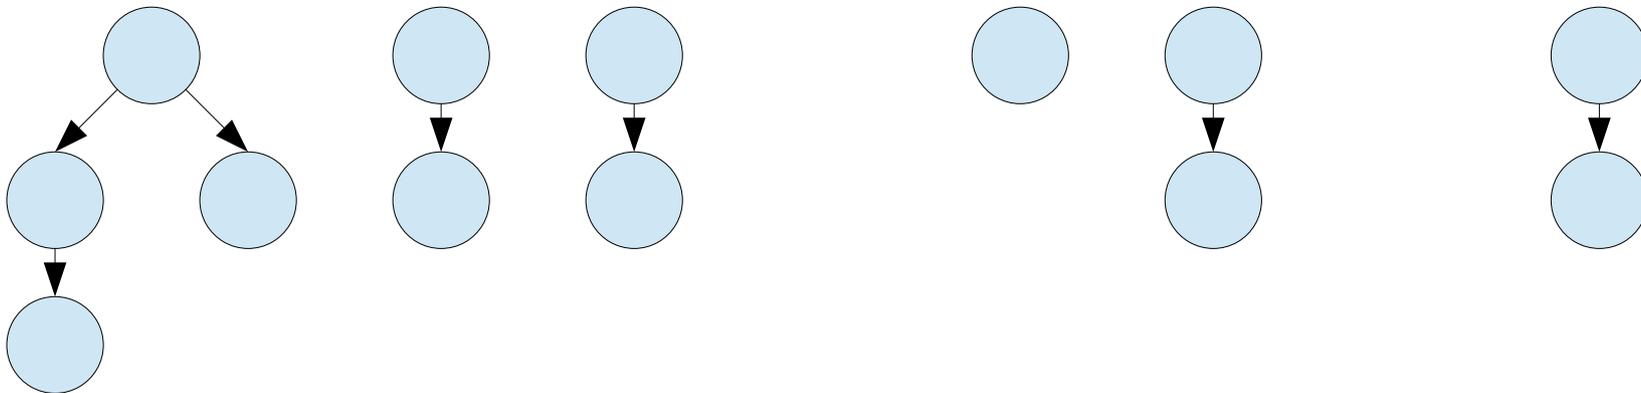


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

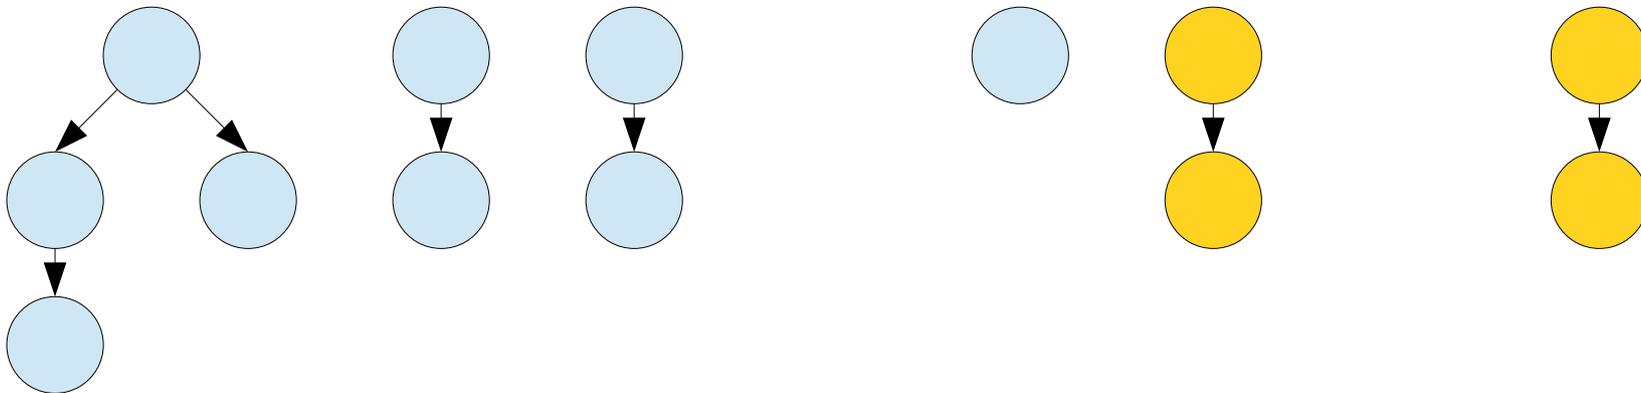


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

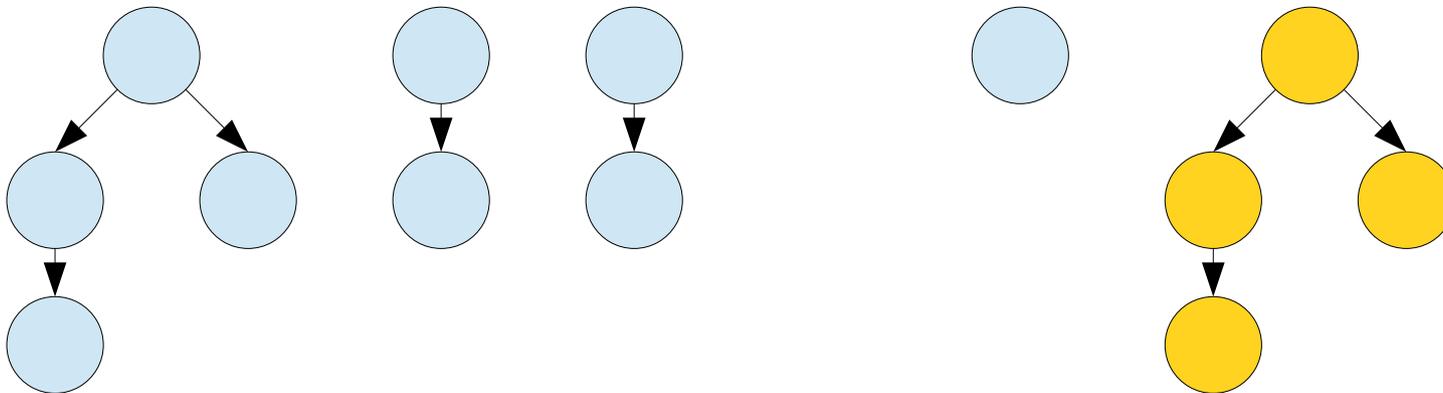


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

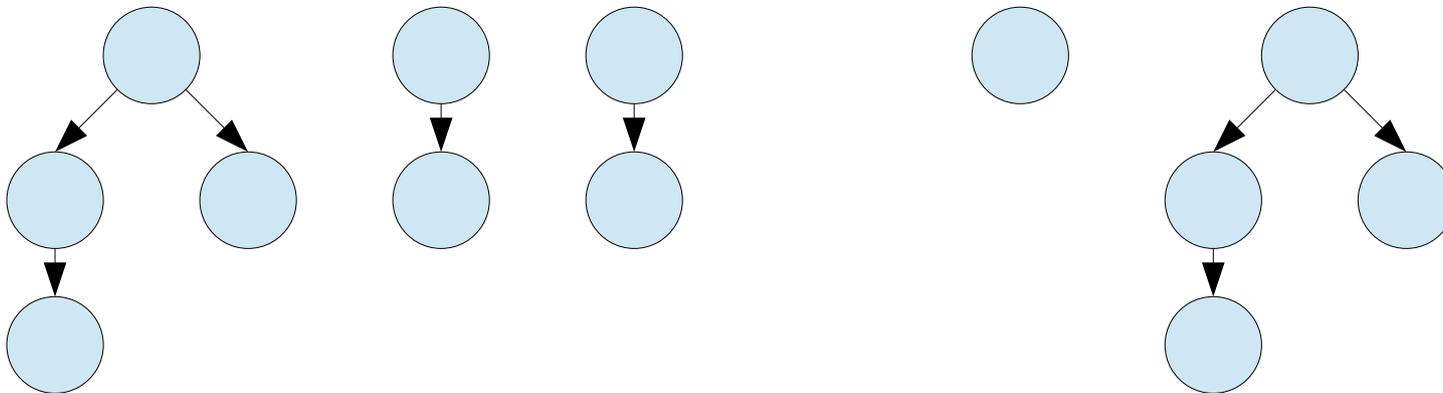


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

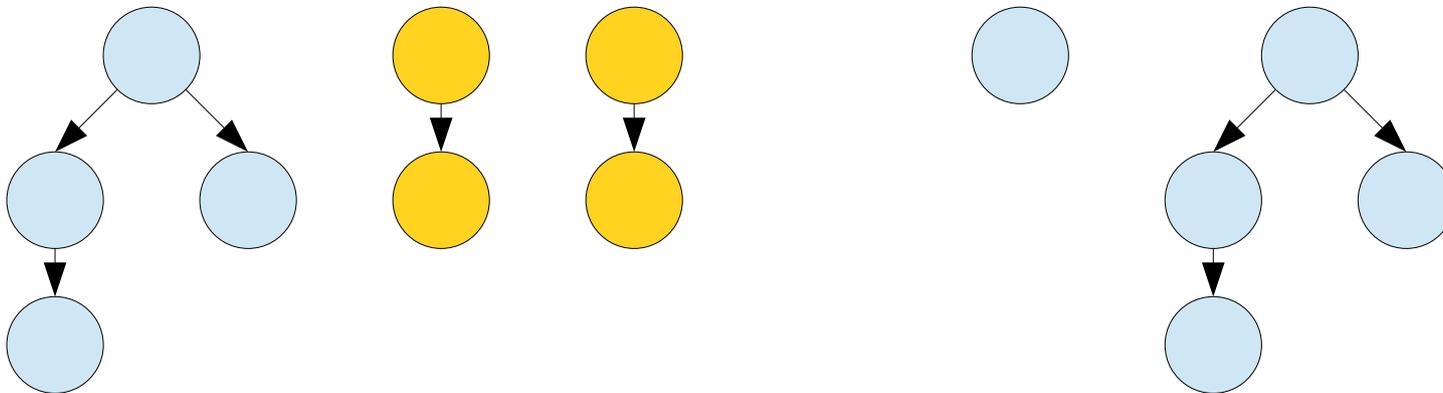


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

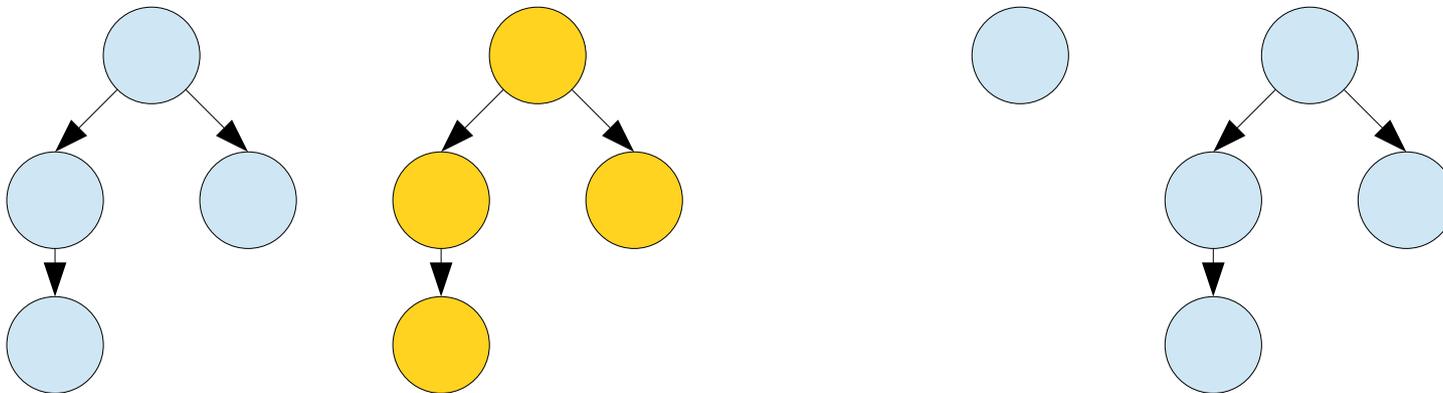


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

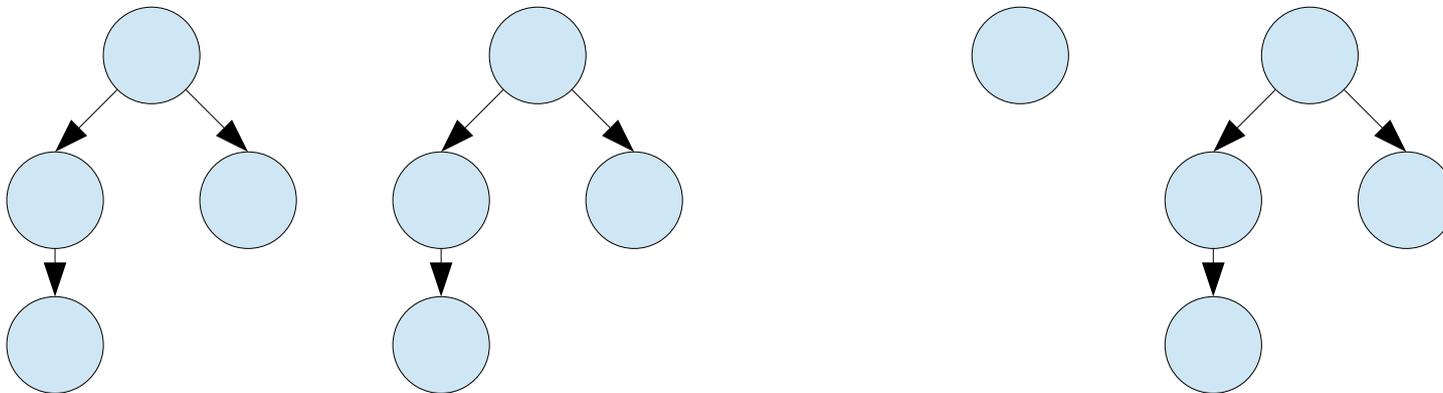


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.


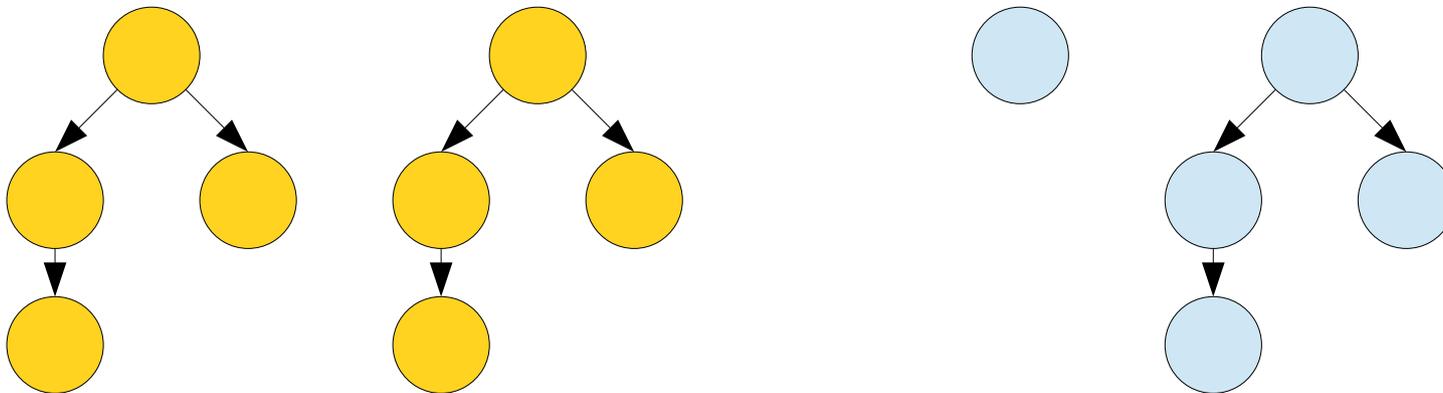


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

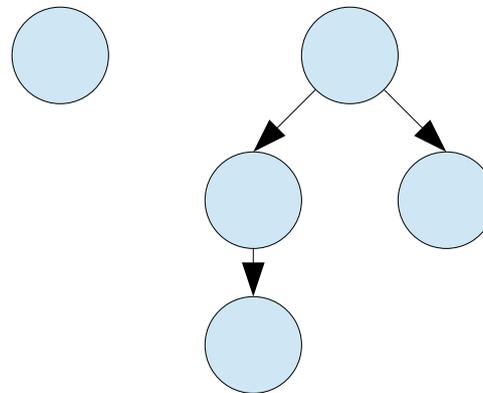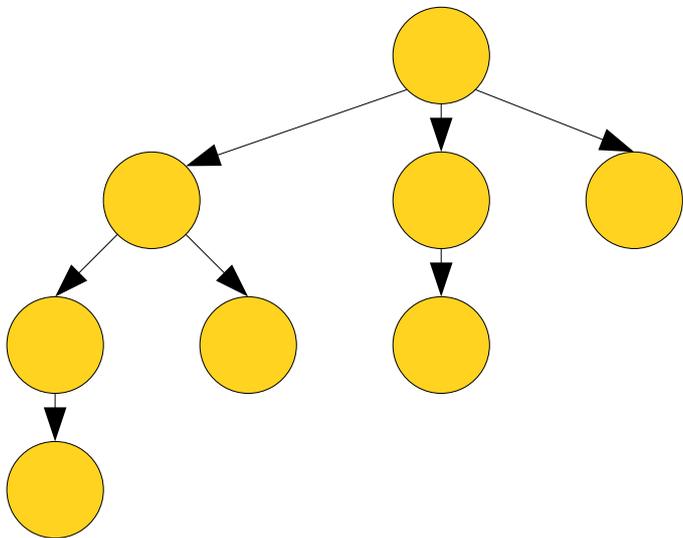


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

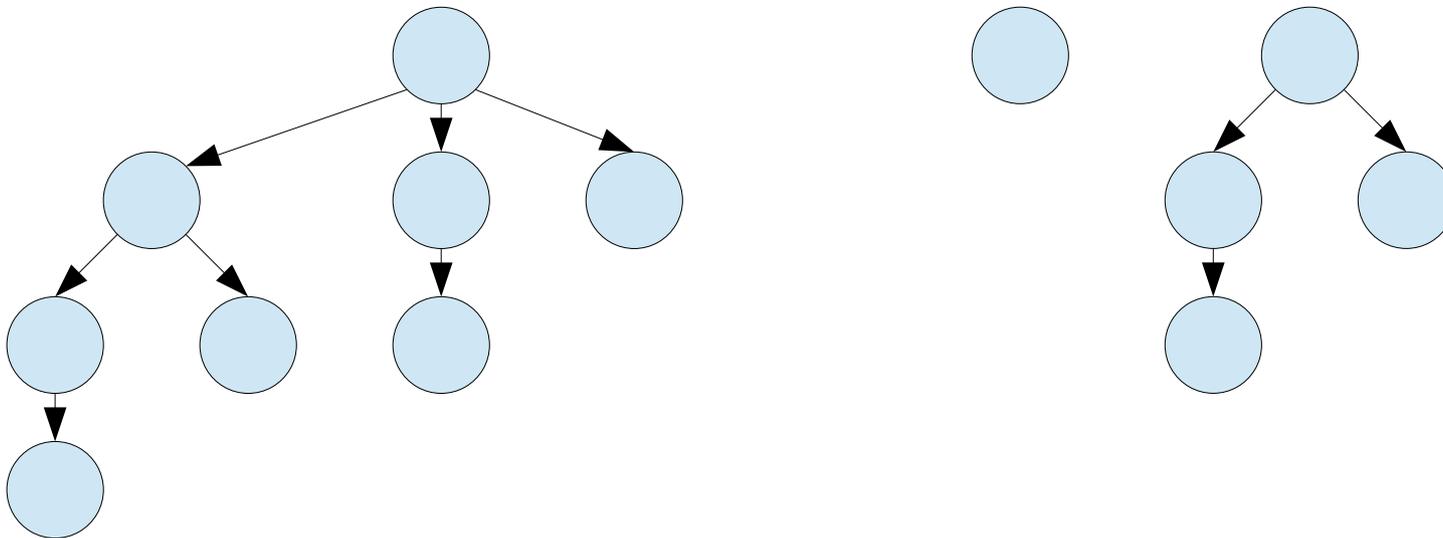


Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

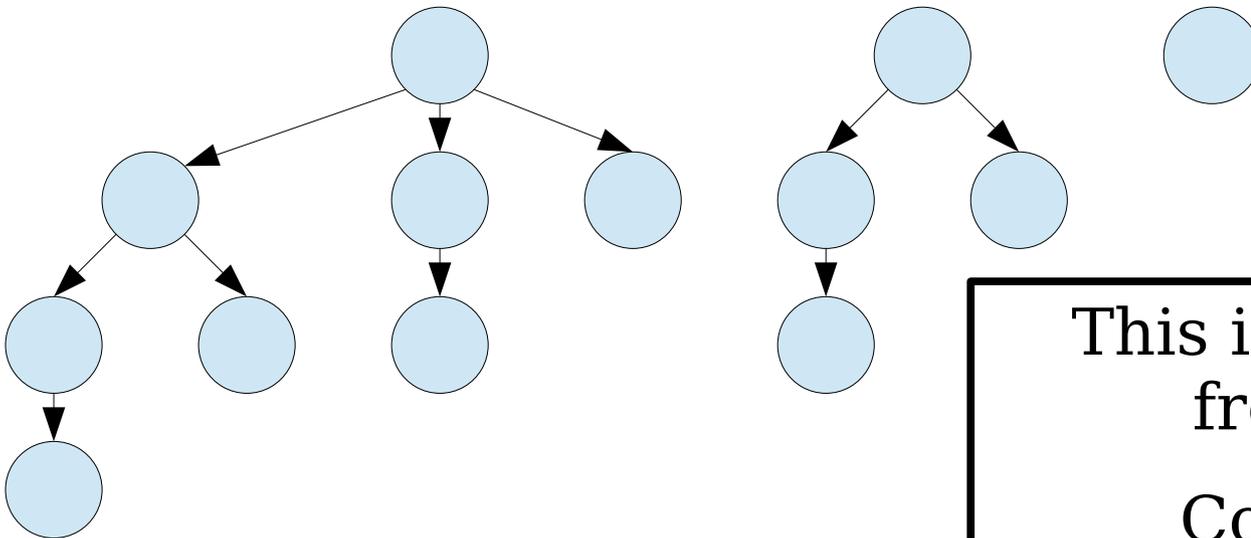

This is the same analysis
from last lecture!

Cost: $O(t + \log n)$.

$\Delta\Phi$: $O(-t + \log n)$.


Amortized cost: **$O(\log n)$** .

Each *enqueue* slowly introduces trees.
Each *extract-min* rapidly cleans them up.

$$\Phi = t$$

where

t is the number of trees.

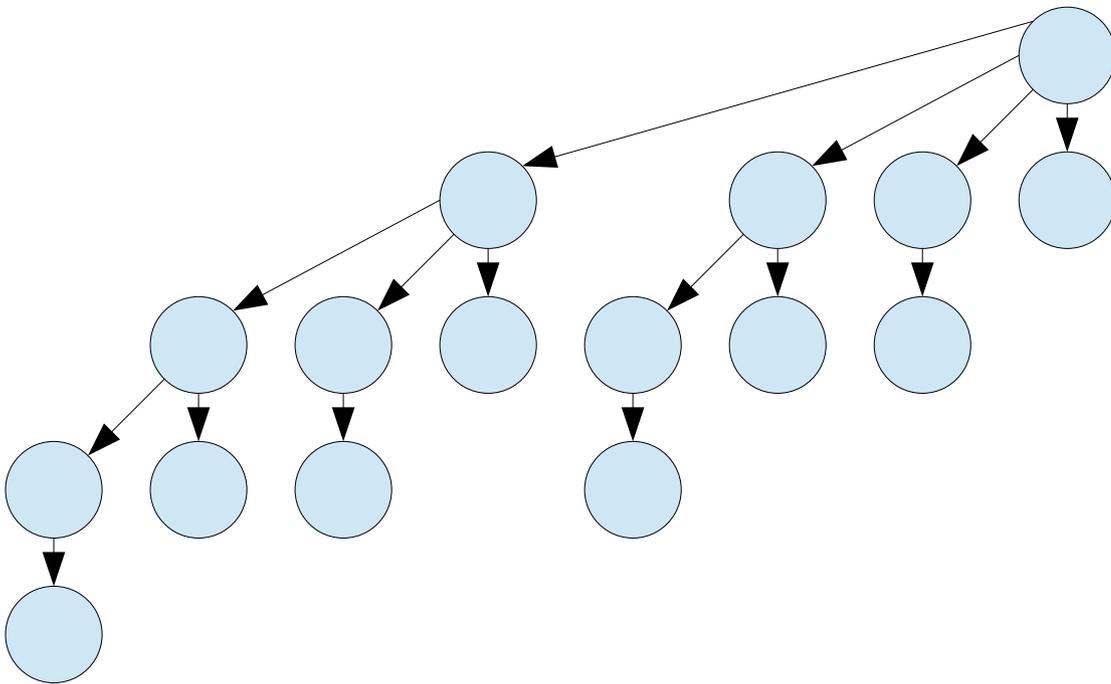


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

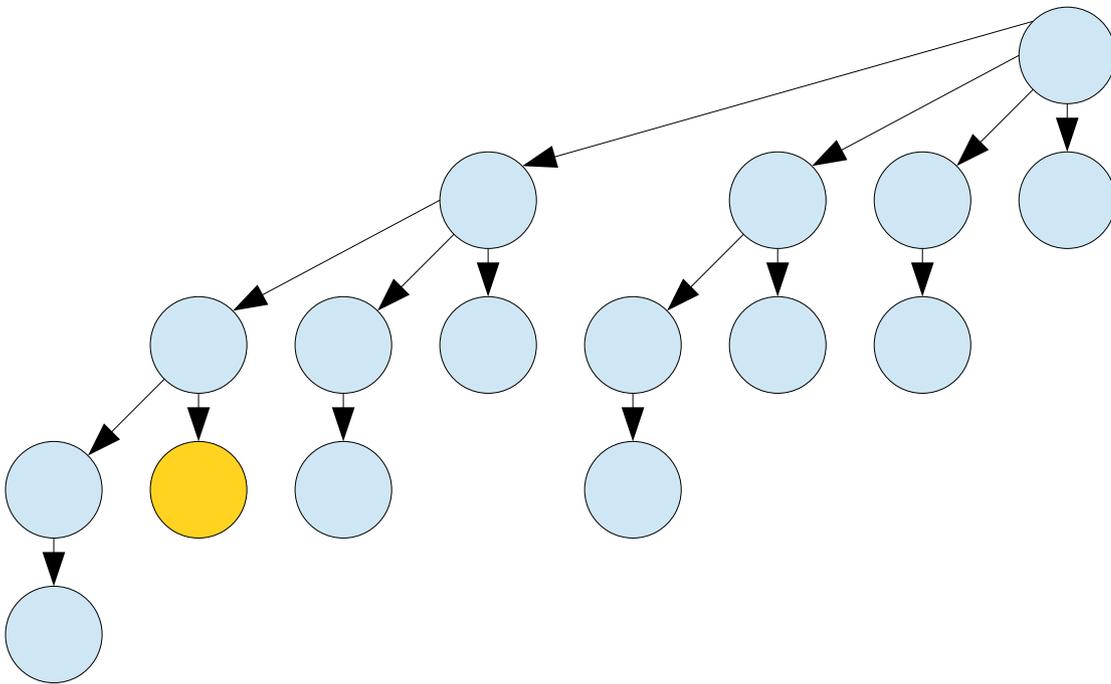


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

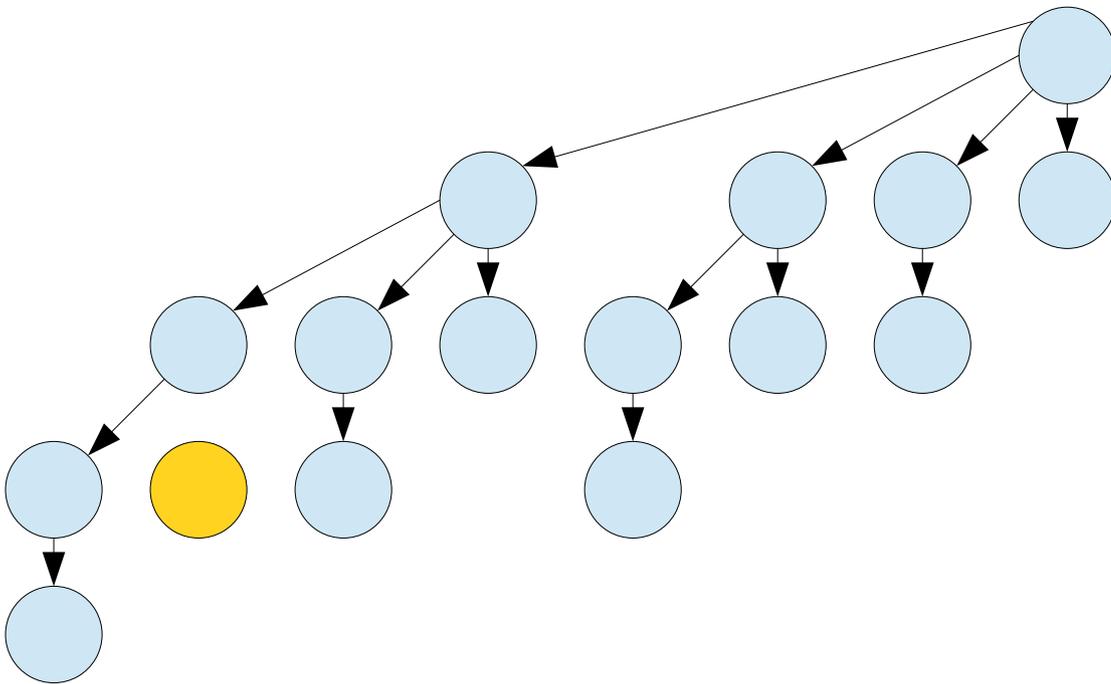


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

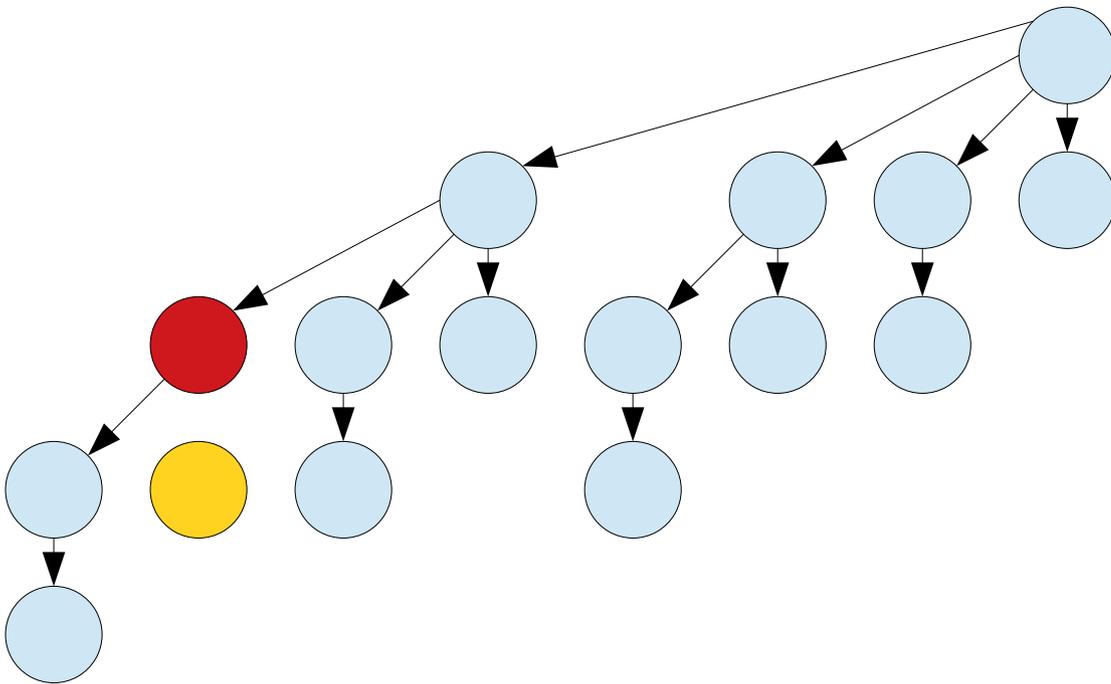


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

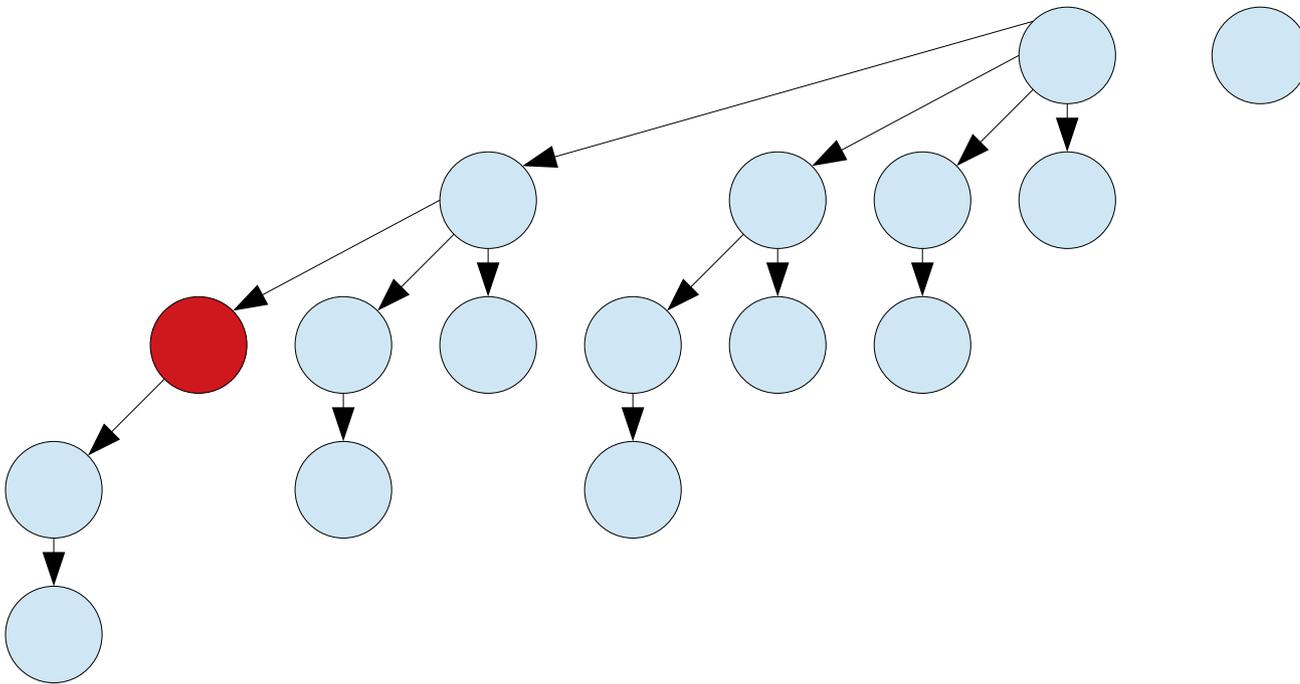


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

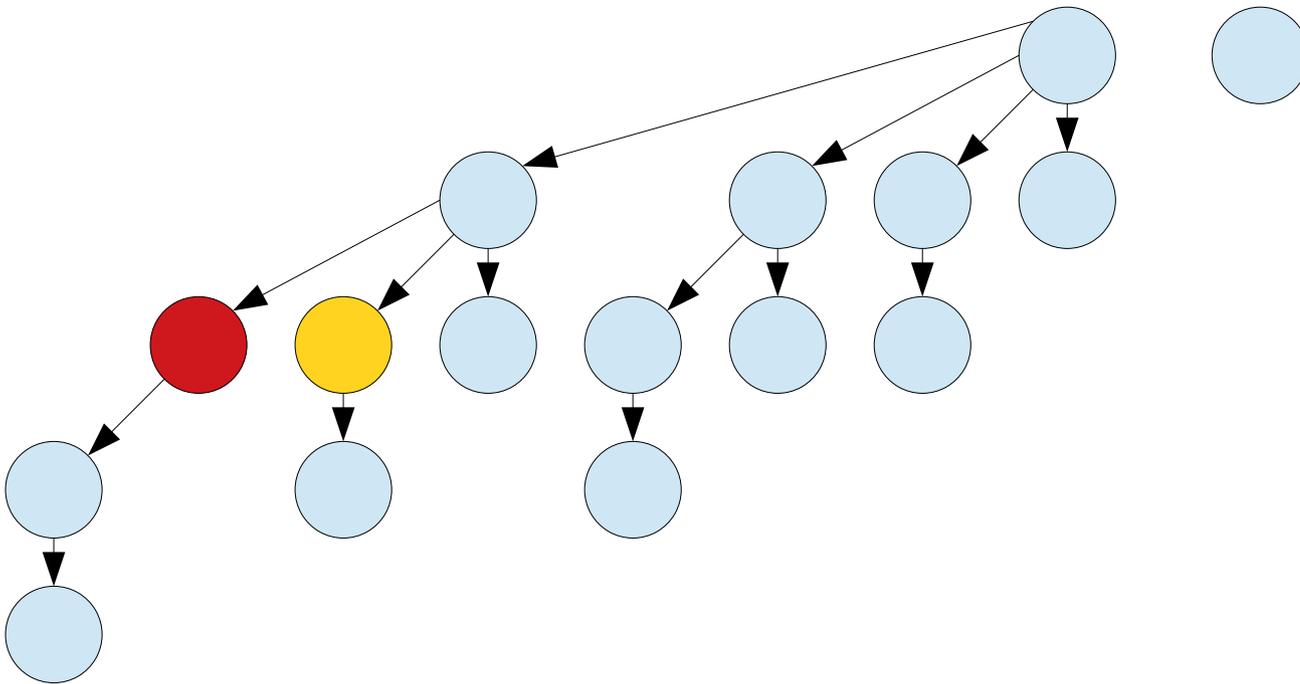


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

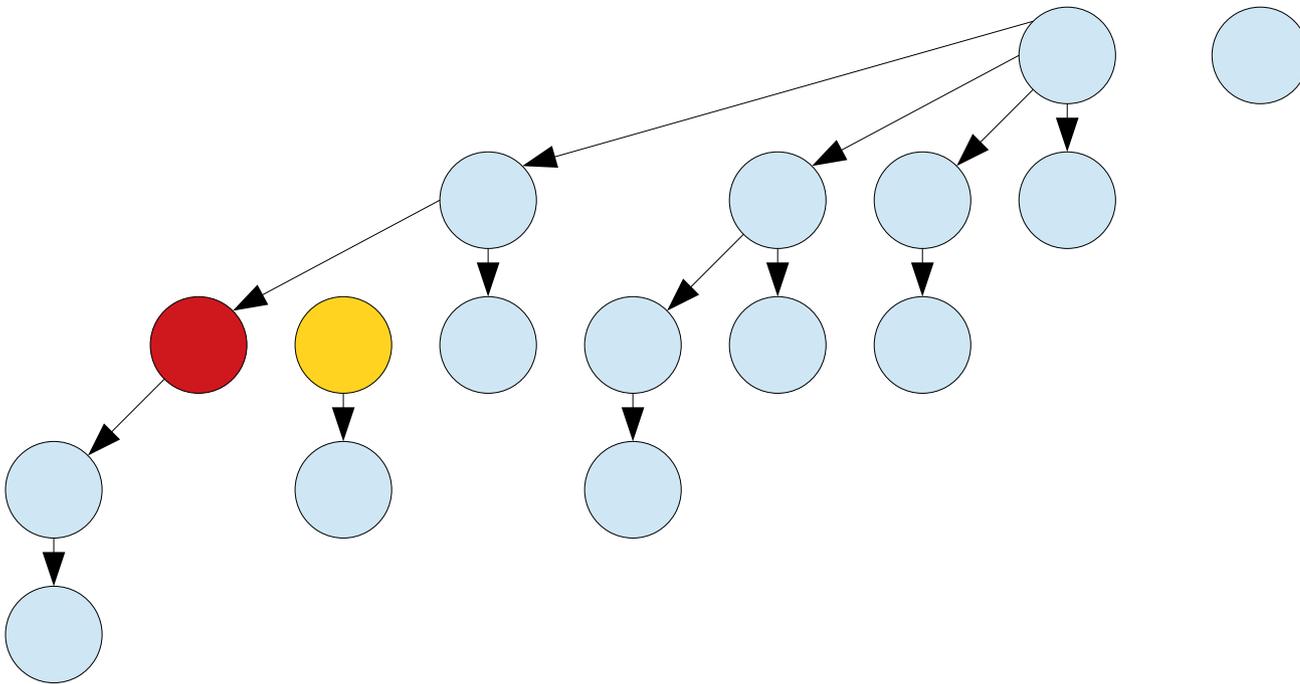


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

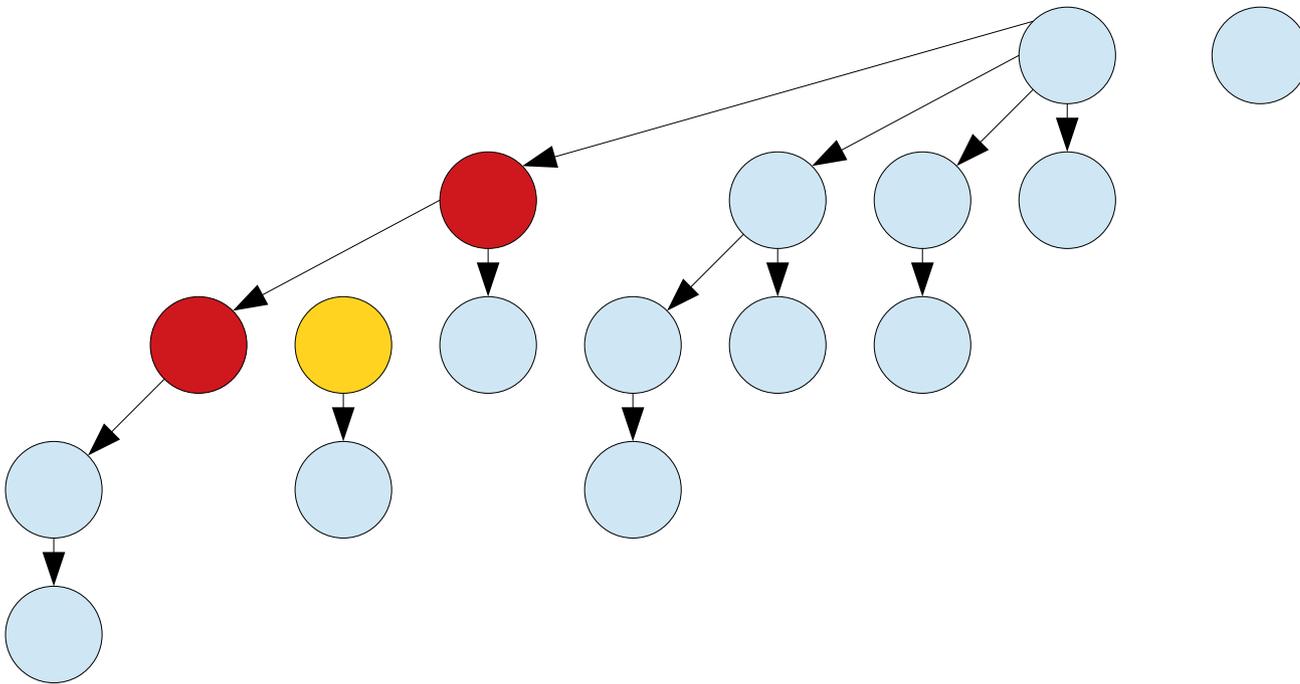


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

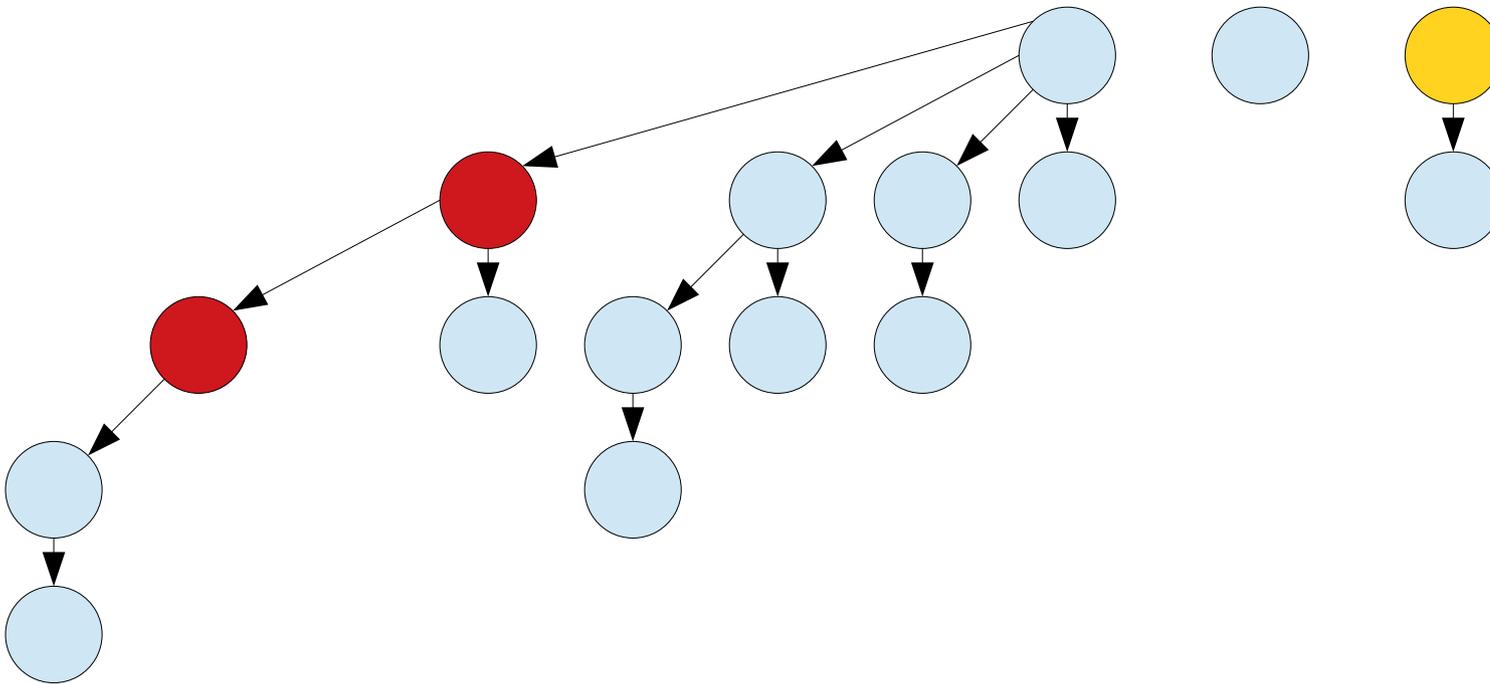


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

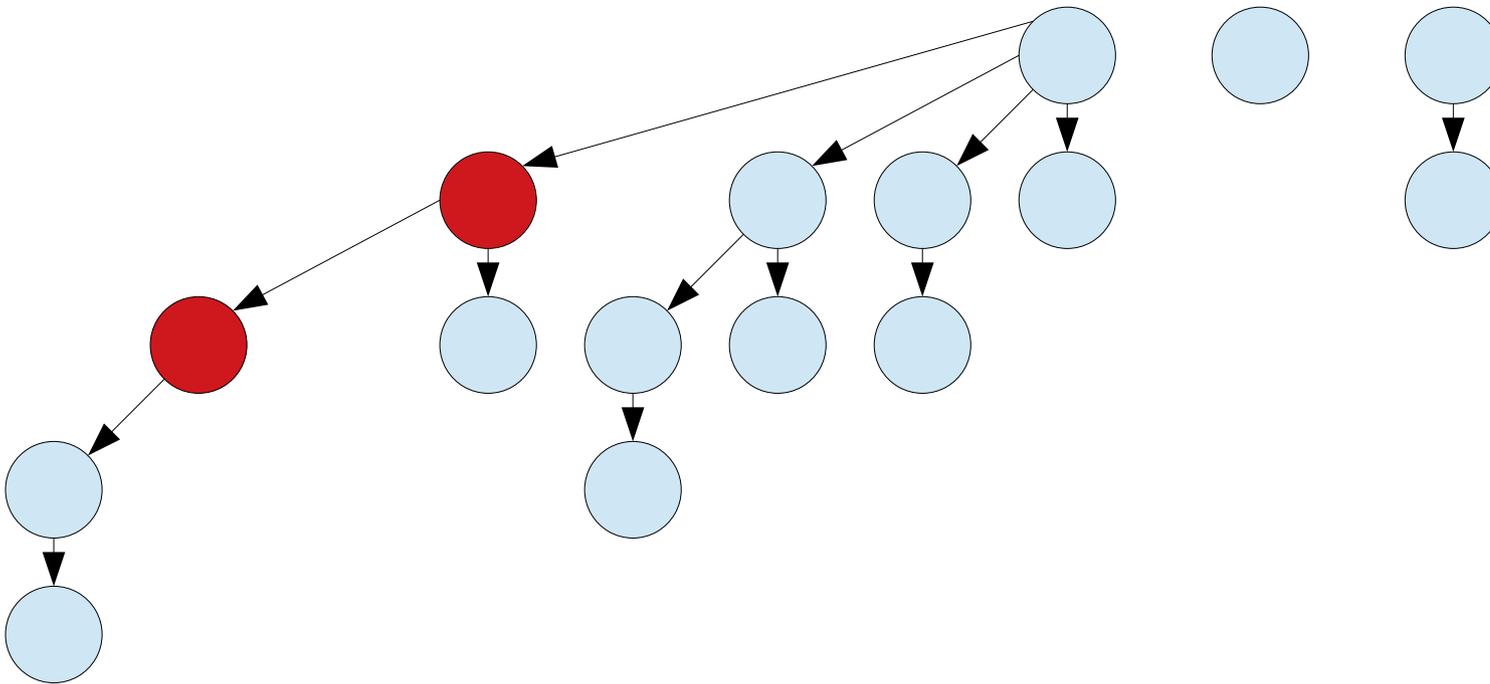


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

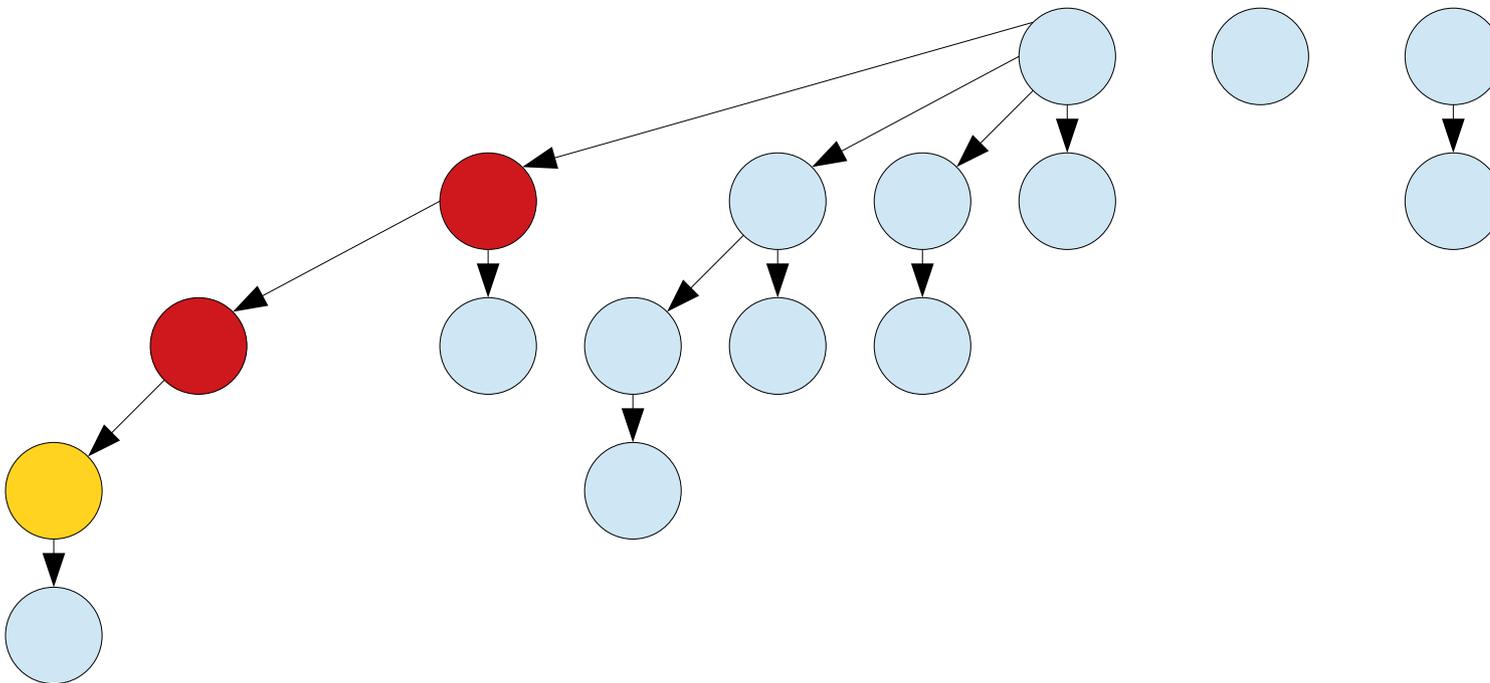


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

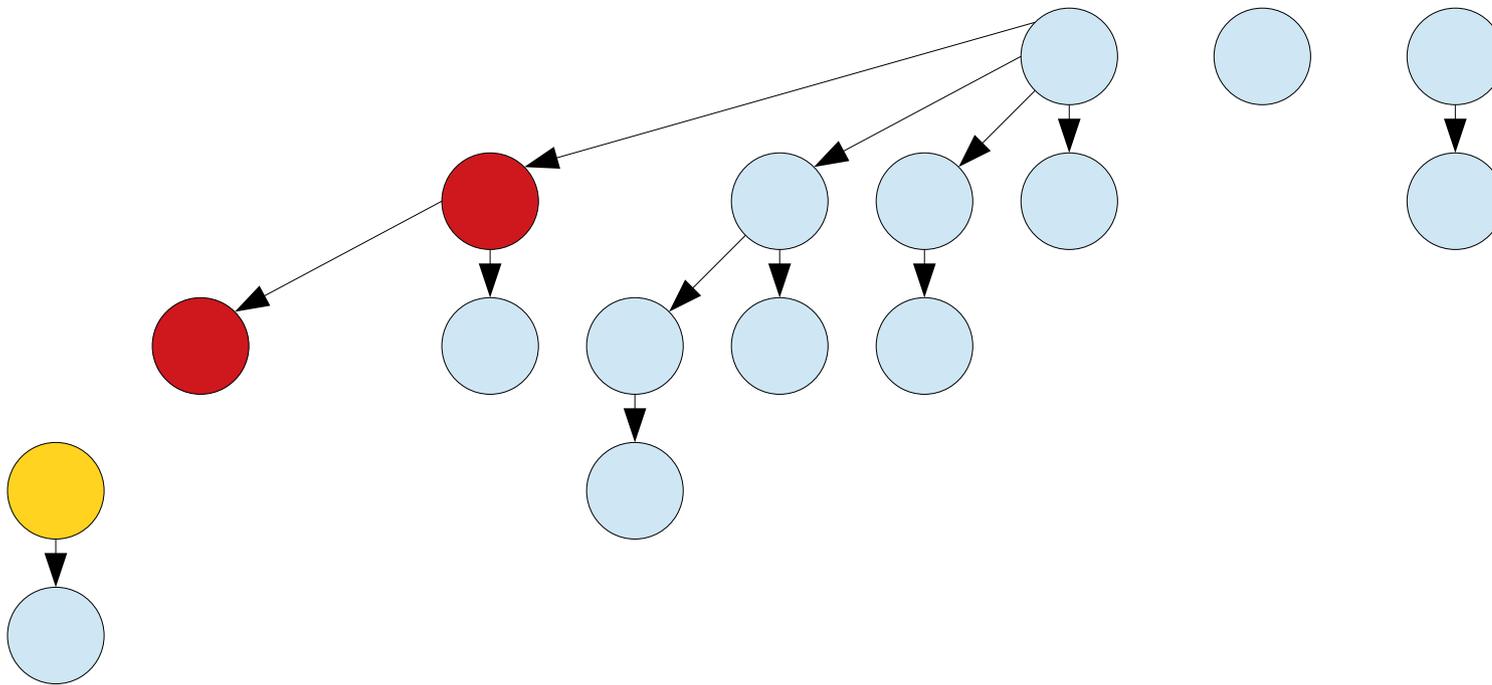


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

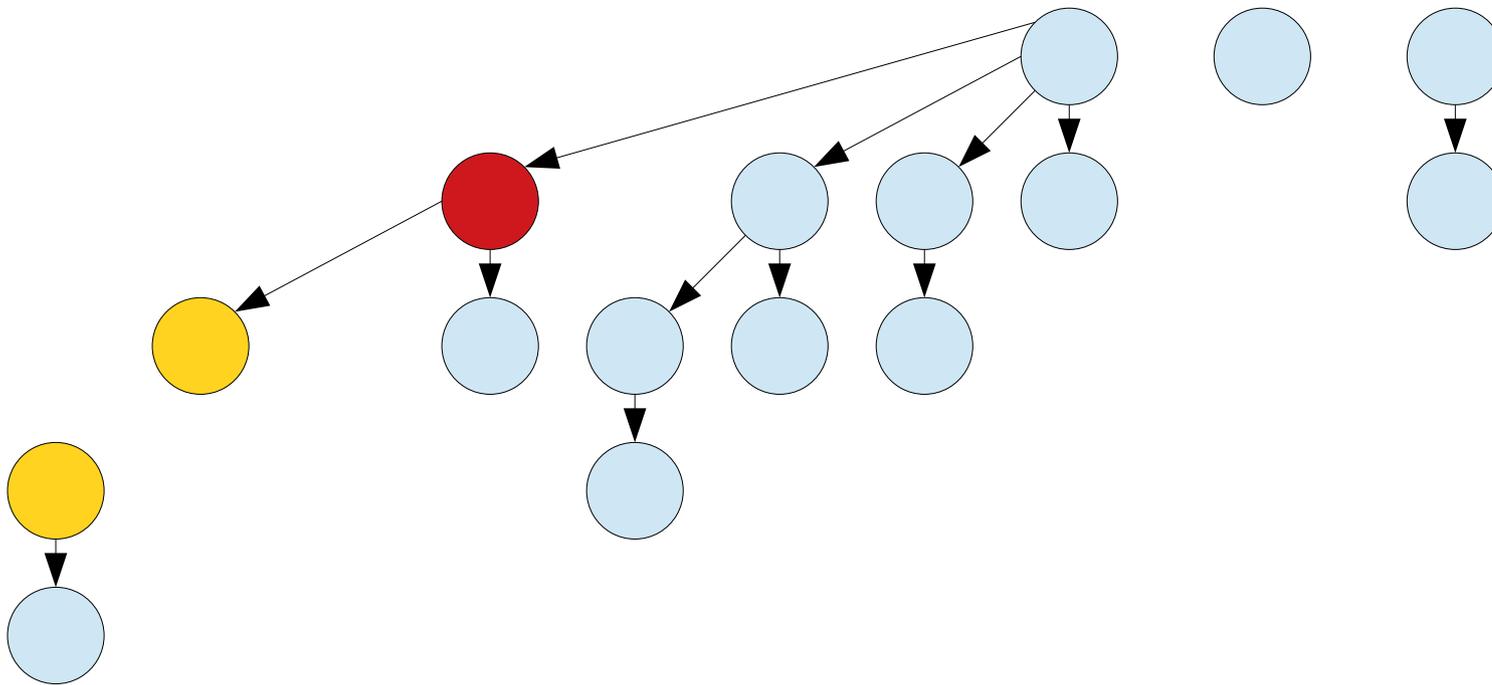


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

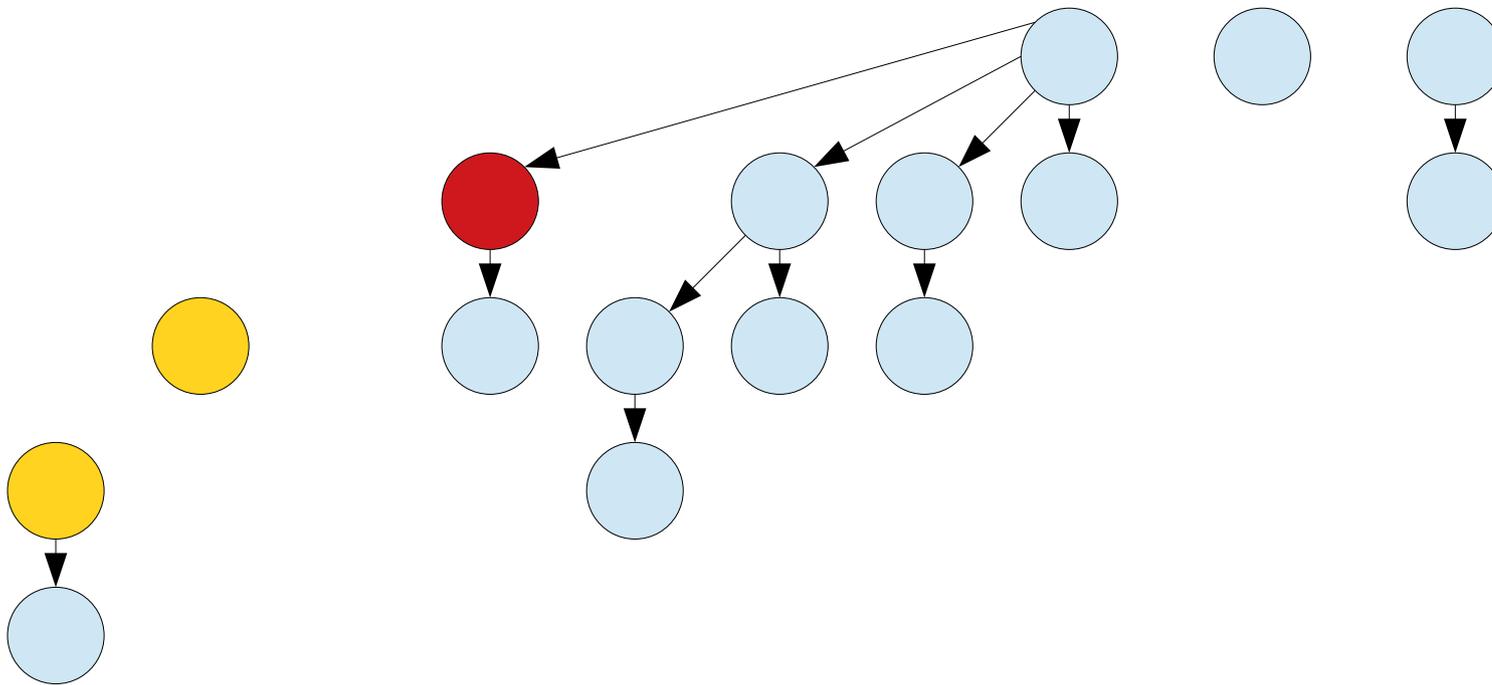


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

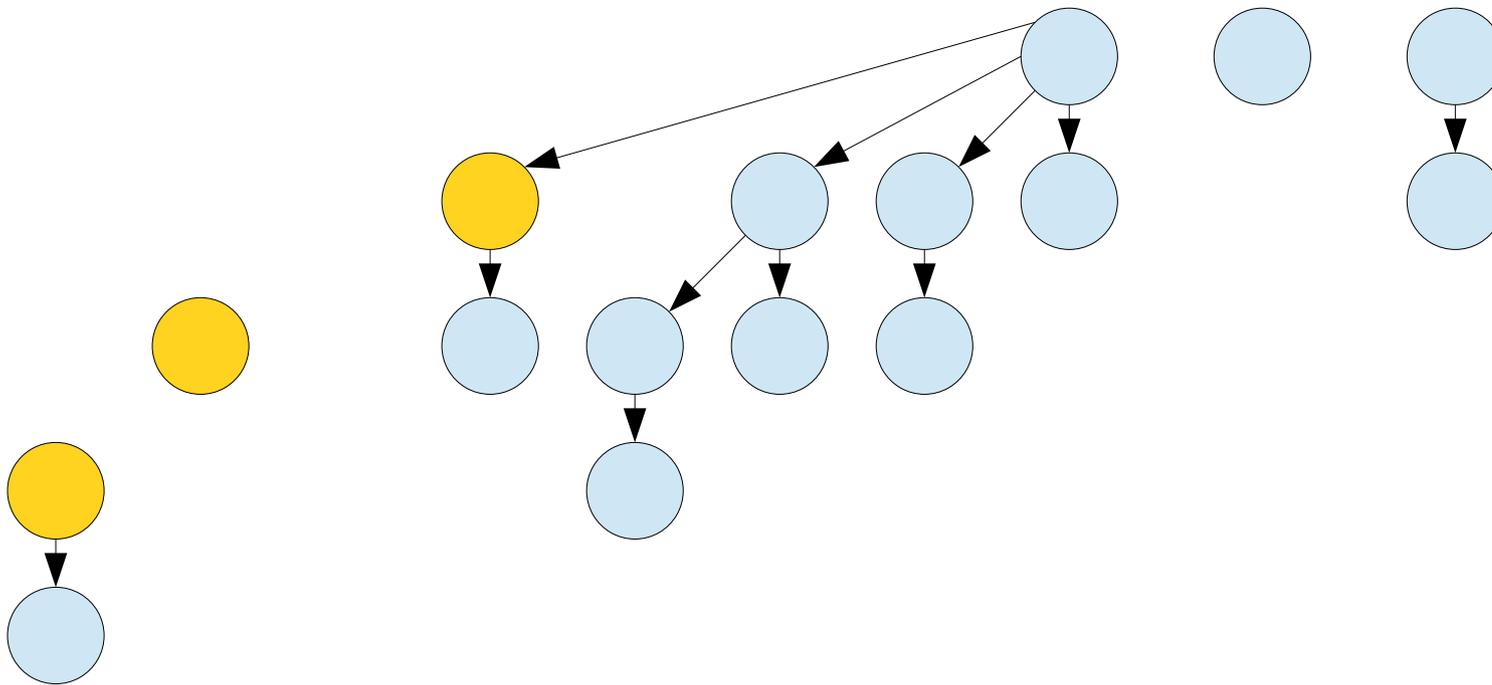


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

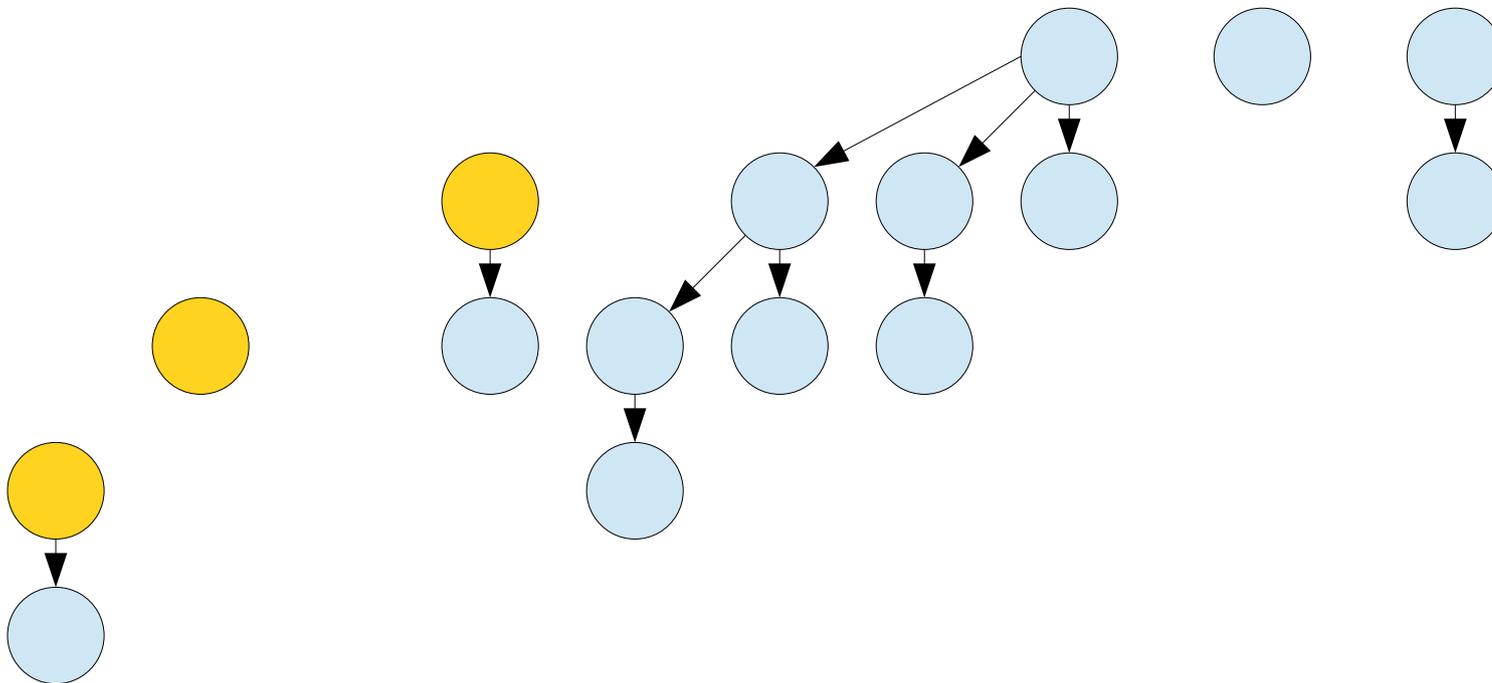


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

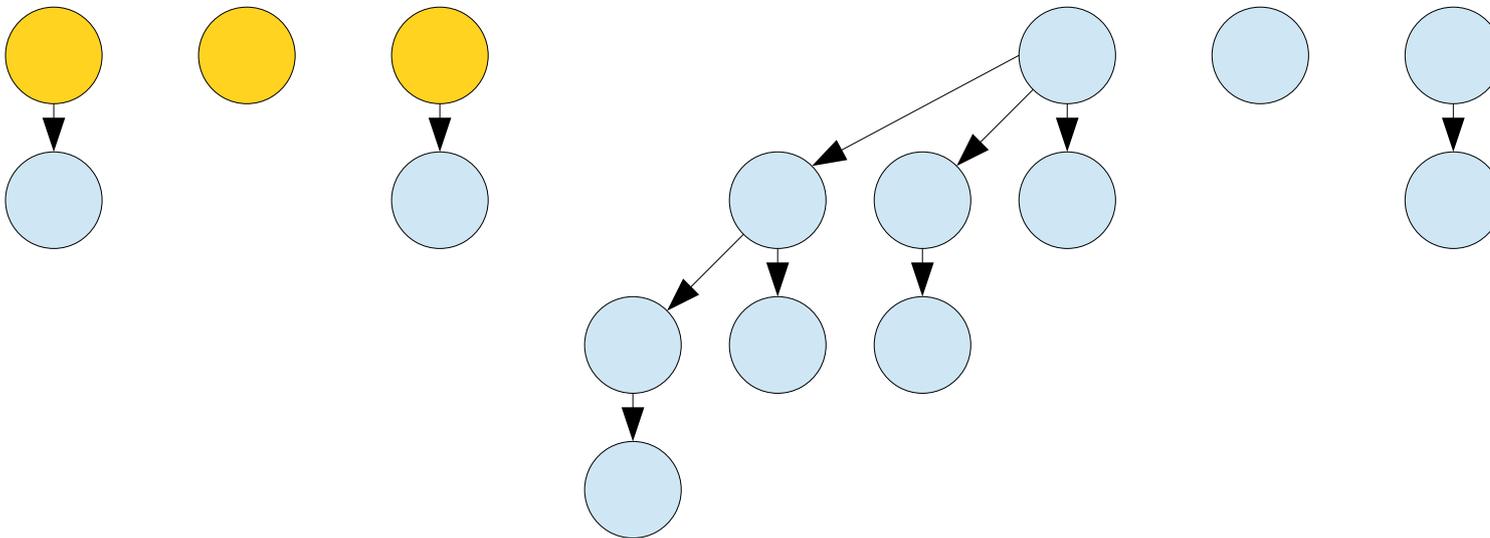


Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where

t is the number of trees.

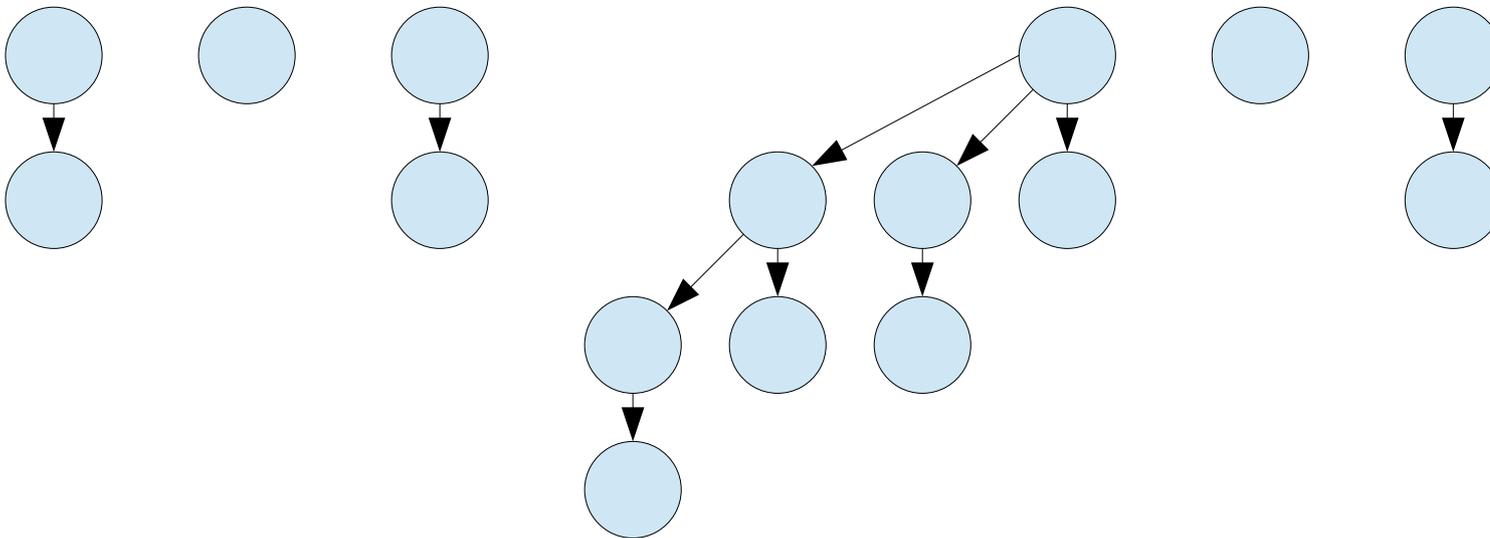

Each **decrease-key** may trigger a chain of cuts.
Those chains happen due to previous **decrease-keys**.

$$\Phi = t$$

where


t is the number of trees.

Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

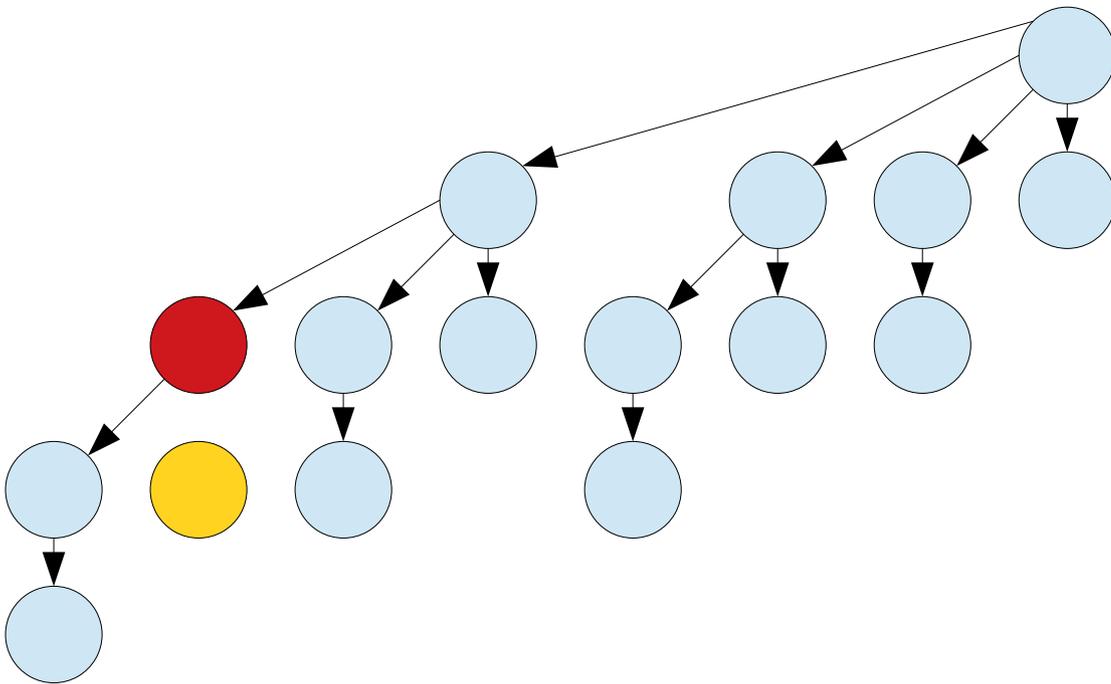


Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

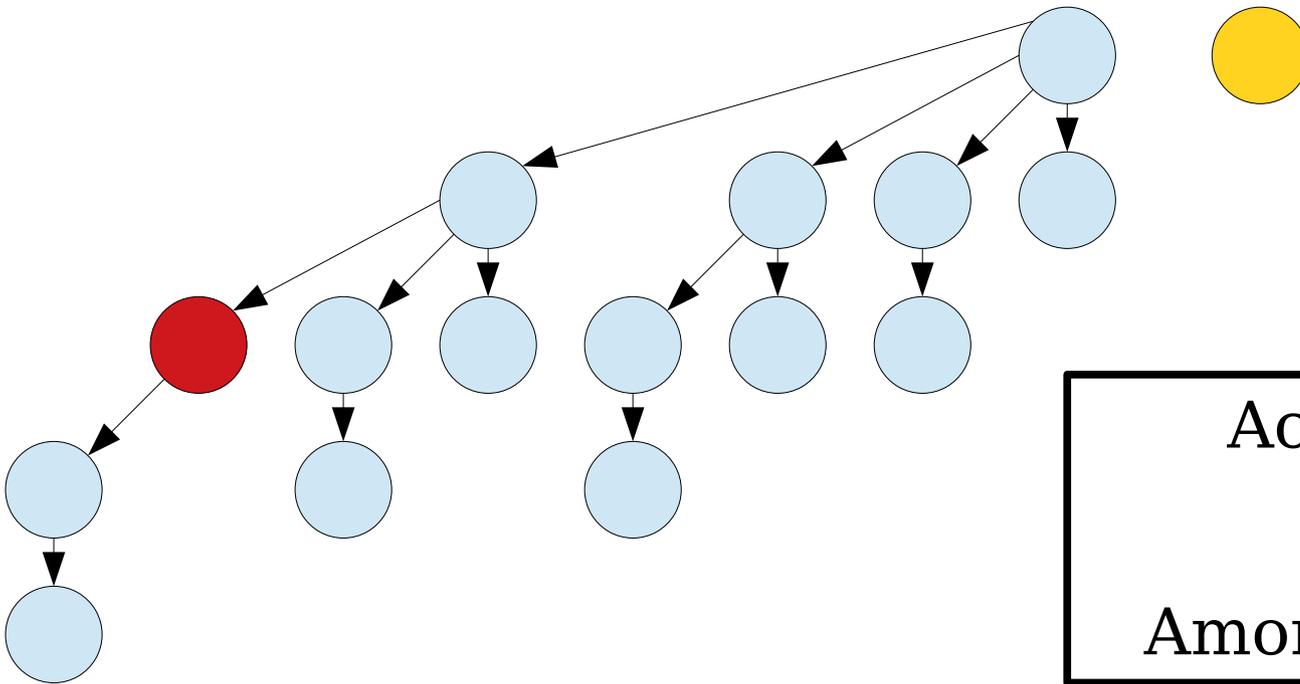

Actual cost: $O(1)$

$\Delta\Phi$: +2.


Amortized cost: **$O(1)$** .

Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

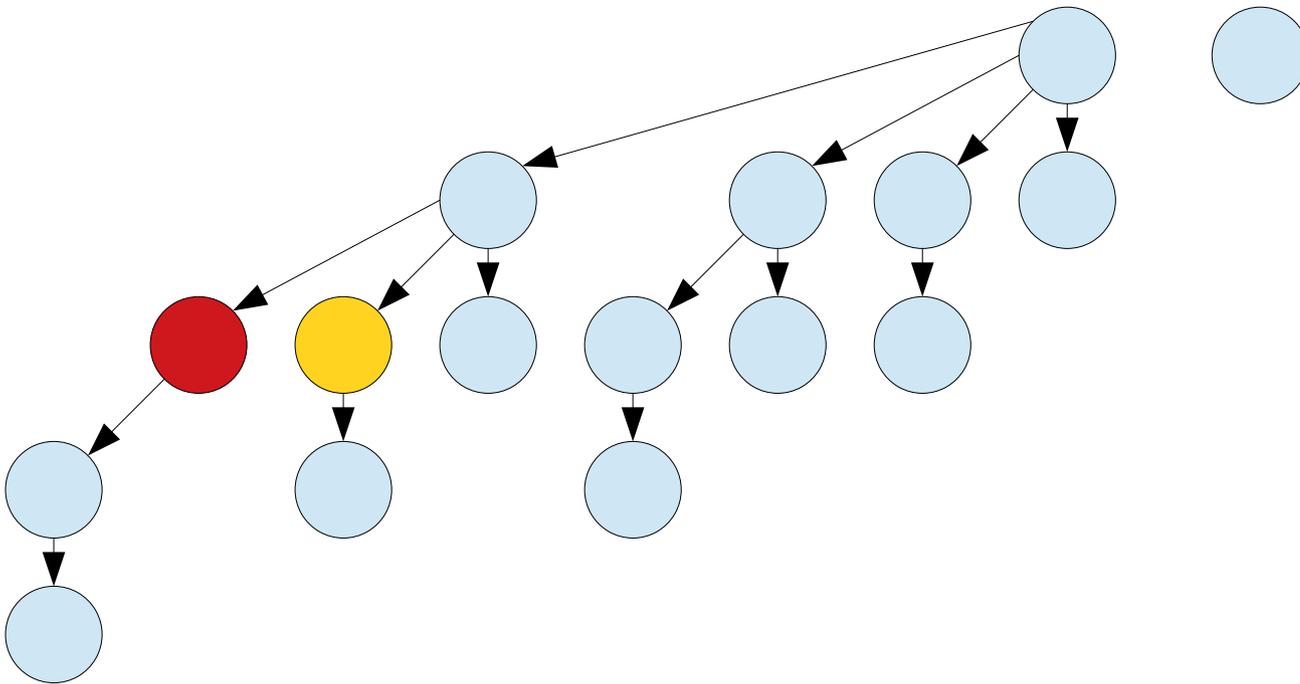


Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

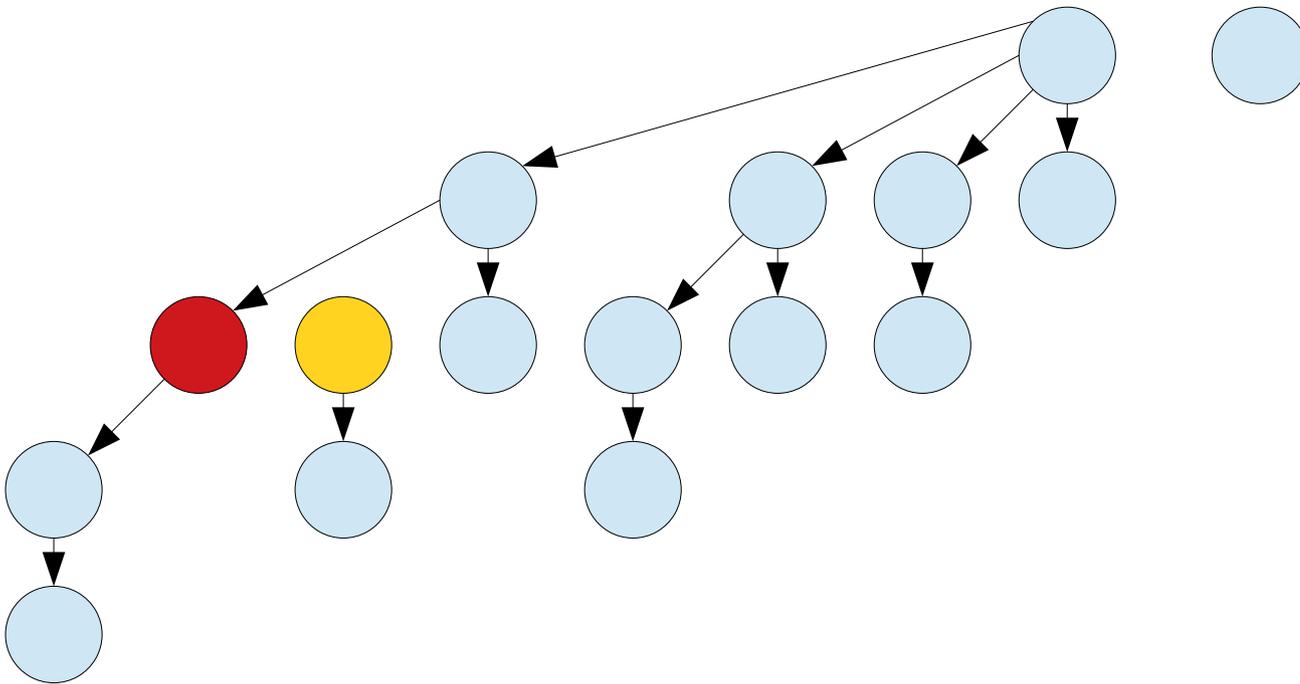


Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

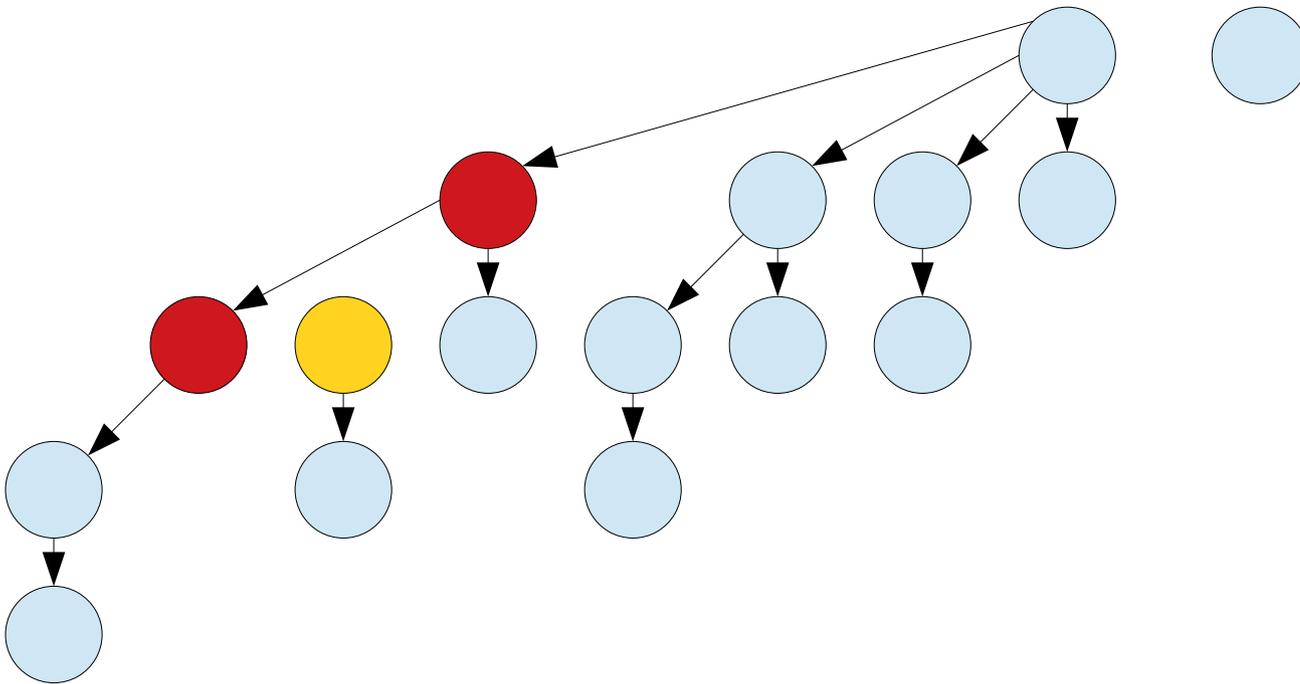


Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

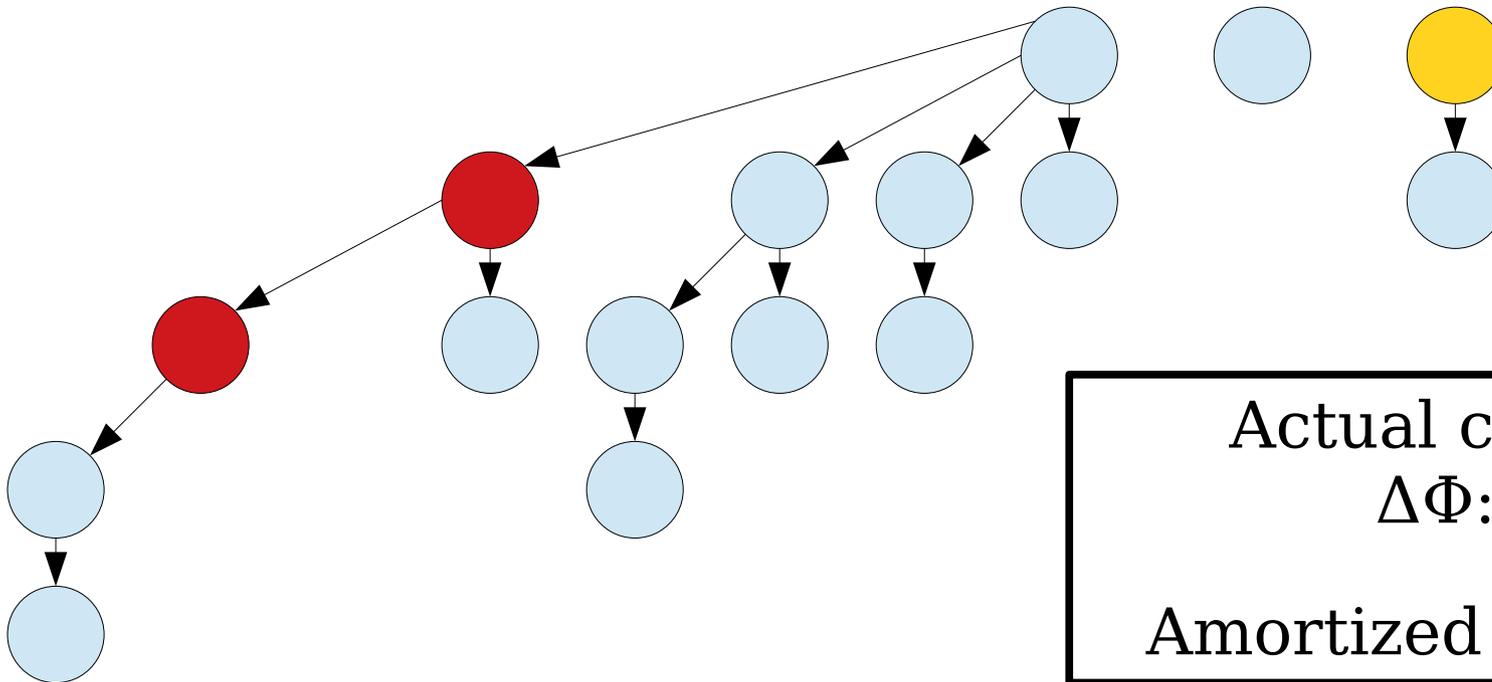

Actual cost: $O(1)$

$\Delta\Phi$: +2.


Amortized cost: **$O(1)$** .

Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

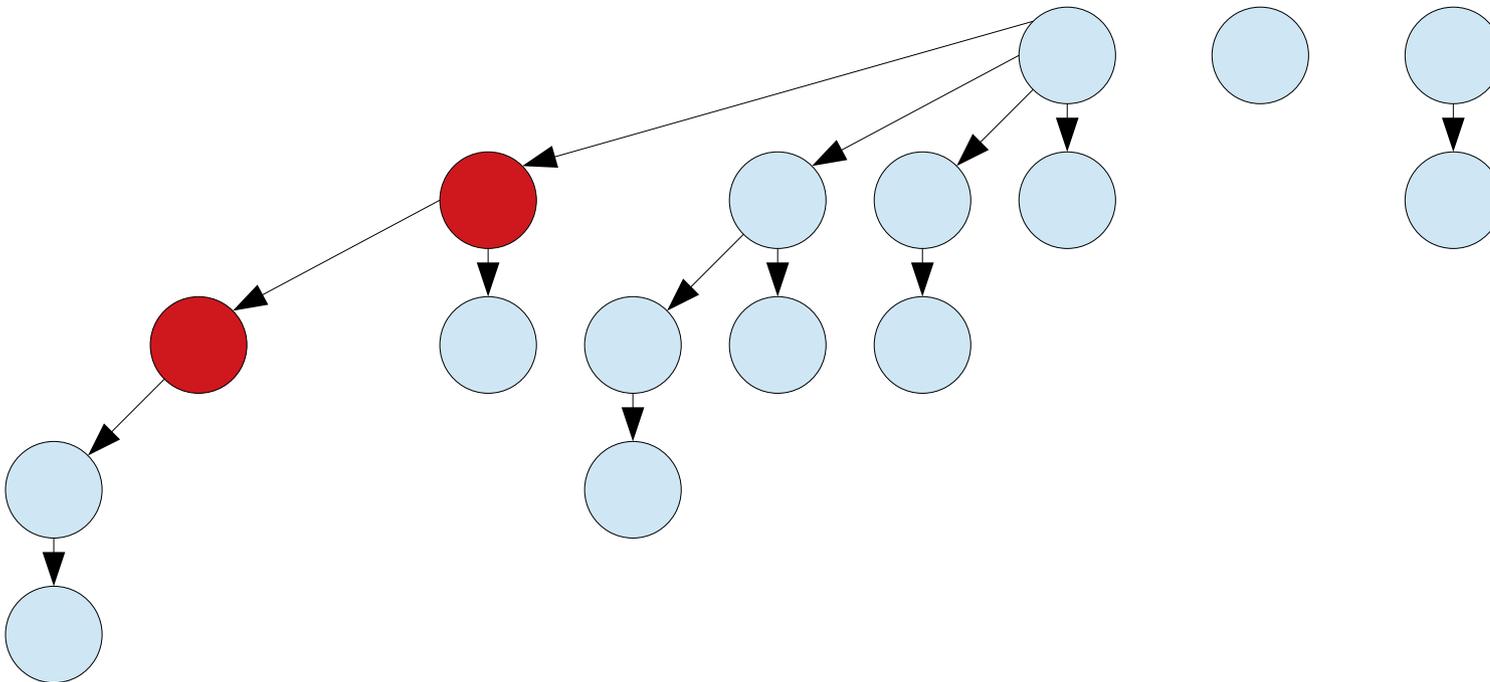


Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

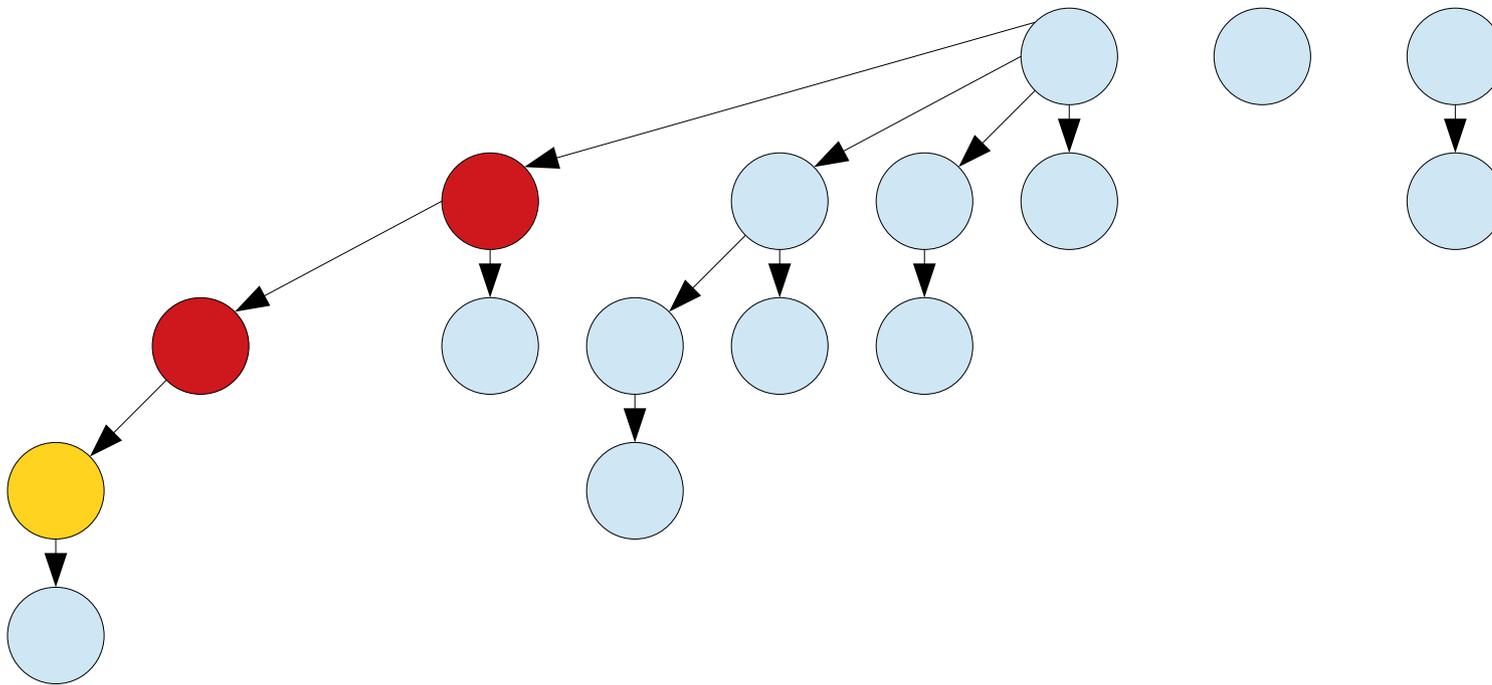


Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

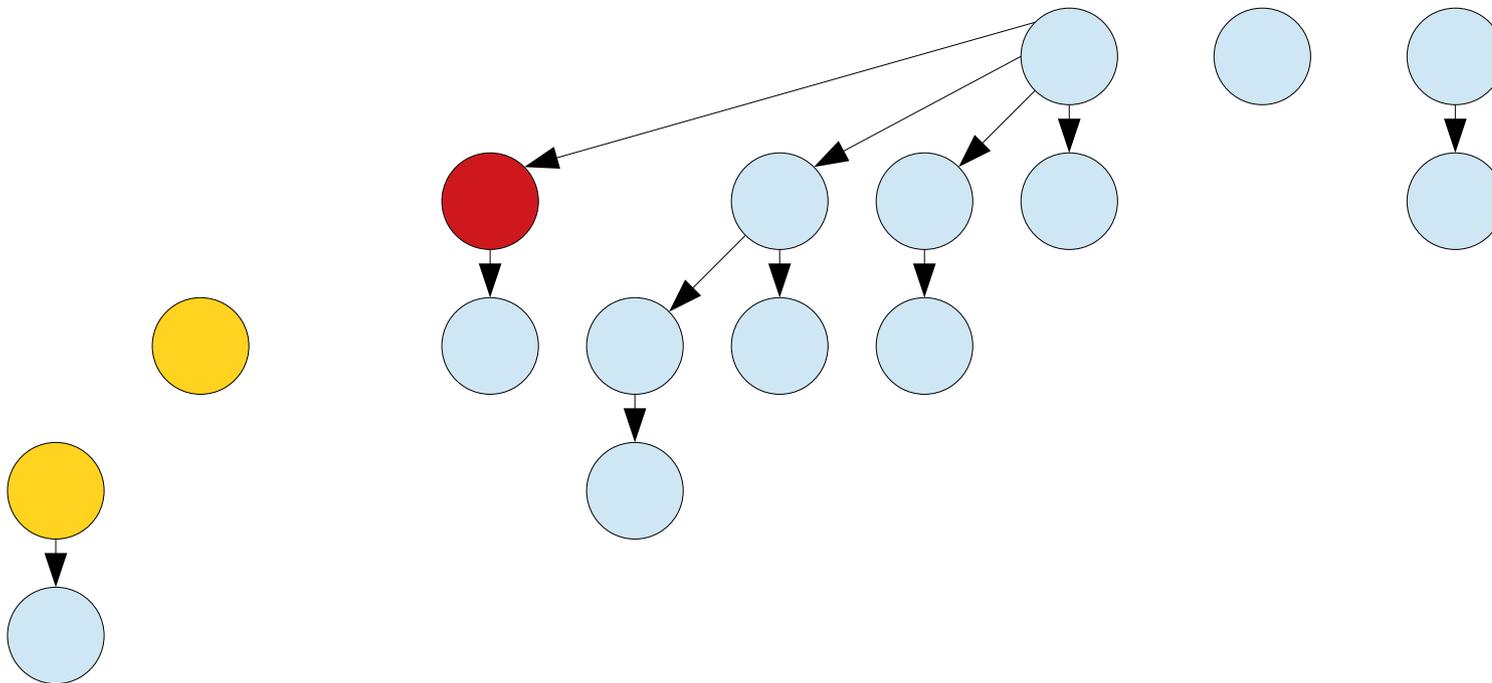


Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

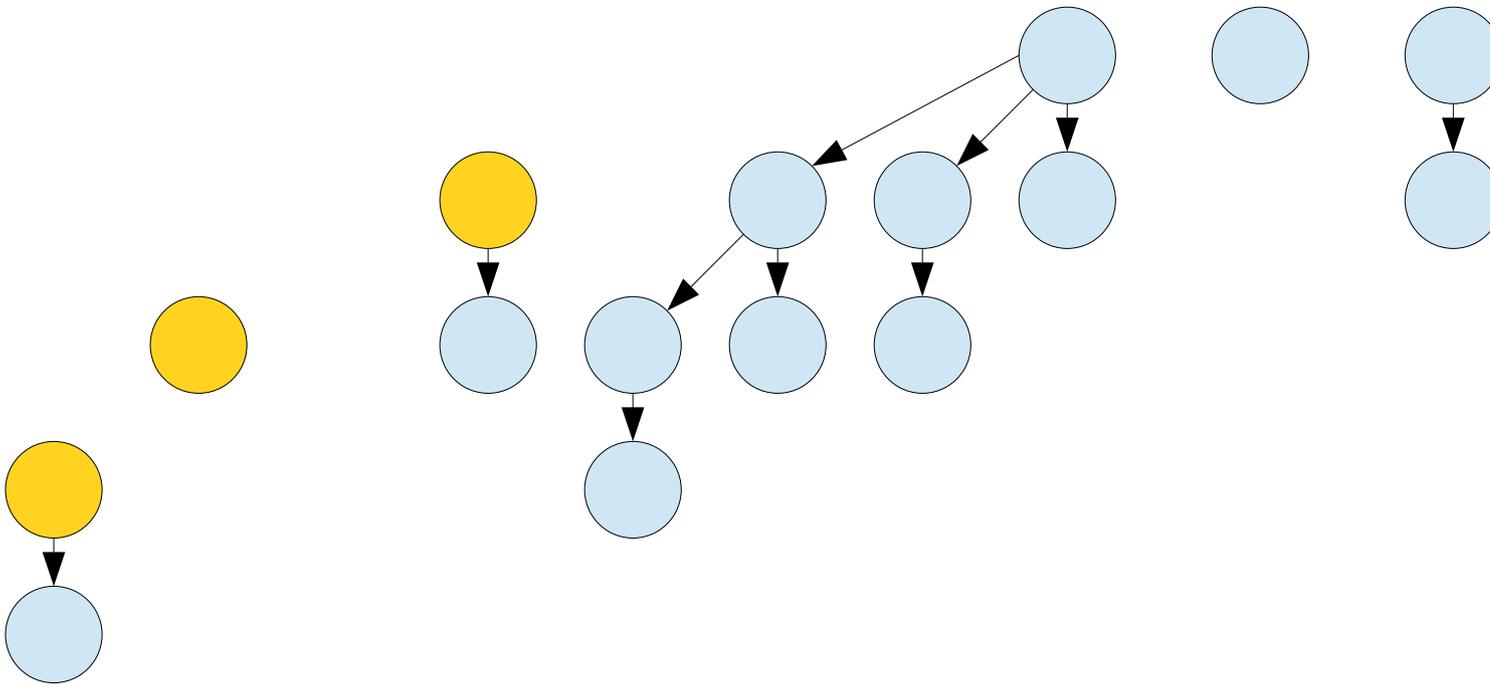


Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

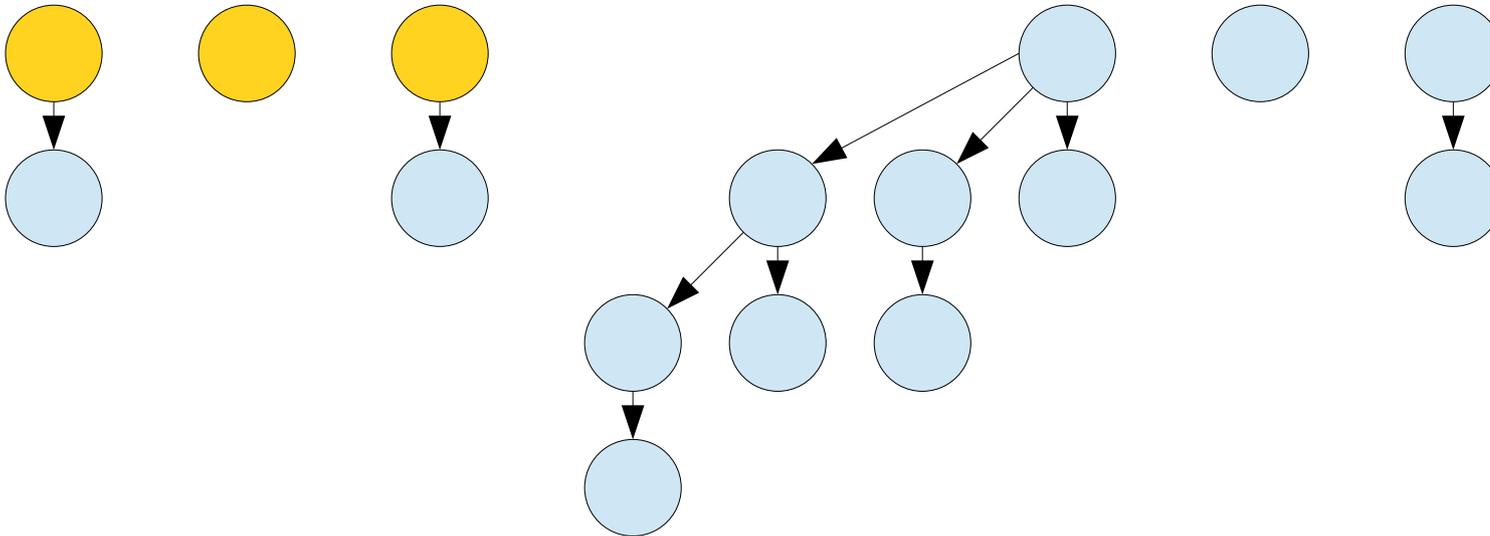


Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where

t is the number of trees and
 m is the number of marked nodes.

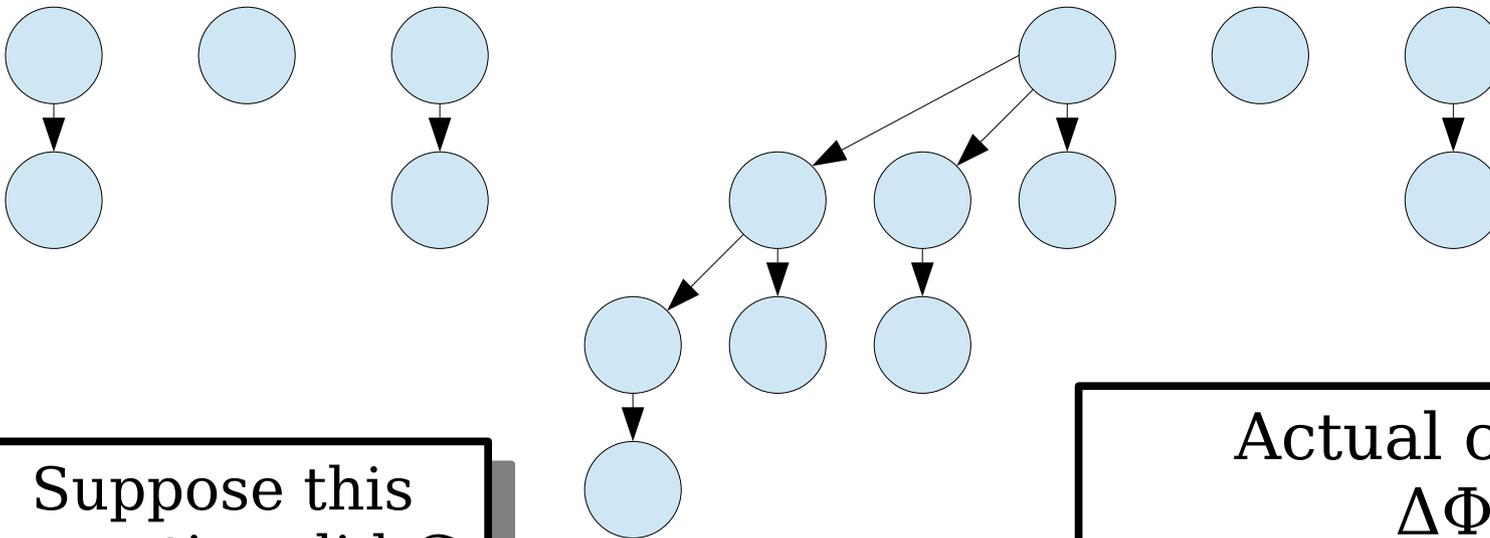

Suppose this
operation did C
total cuts.

Actual cost: $O(C)$
 $\Delta\Phi: +1$
Amortized cost: **$O(C)$** .

Idea: Factor the number of marked nodes into our potential to offset the cost of cascading cuts.

$$\Phi = t + m$$

where


t is the number of trees and
 m is the number of marked nodes.

Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

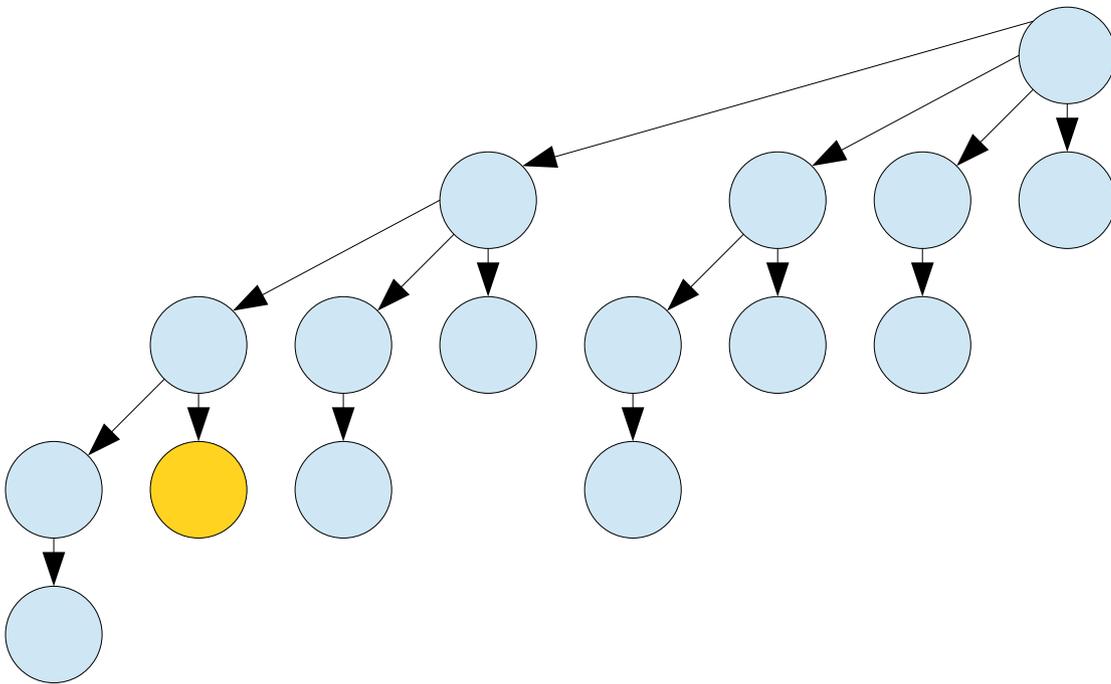


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

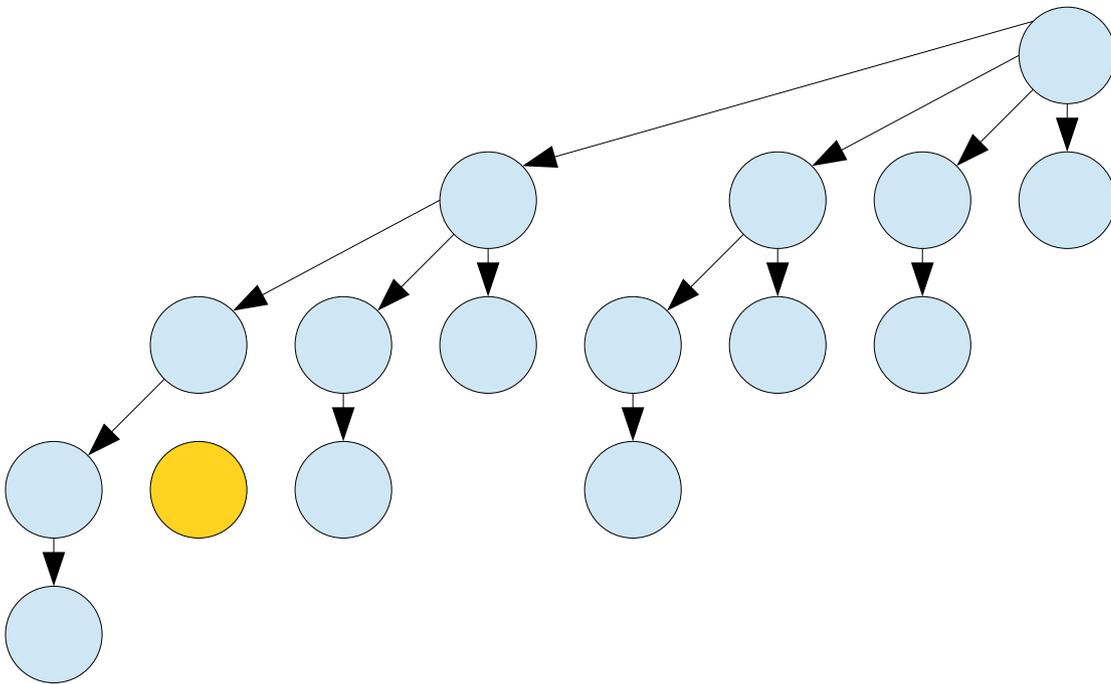


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

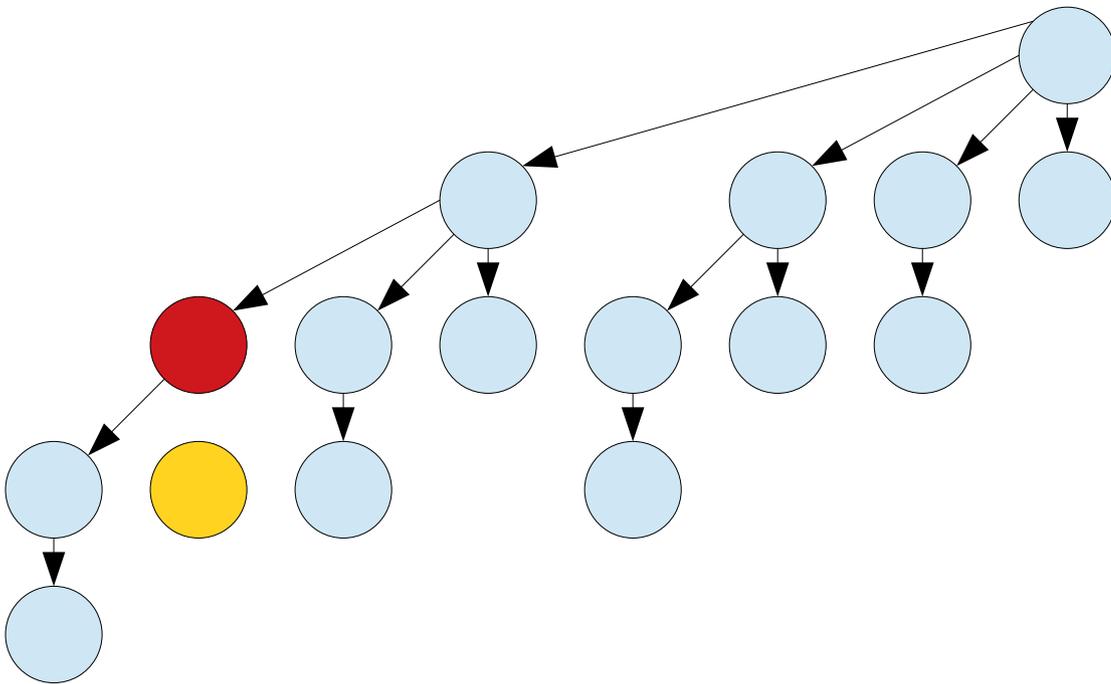


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

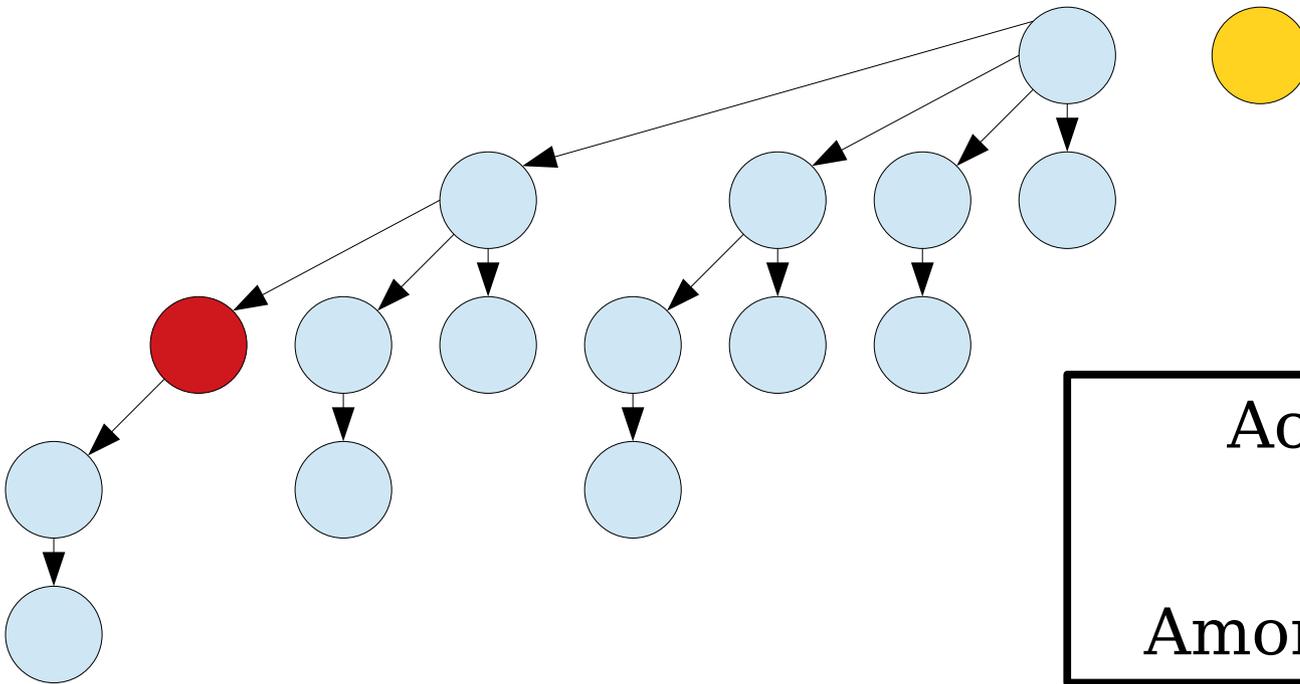

Actual cost: $O(1)$

$\Delta\Phi$: +3.


Amortized cost: **$O(1)$** .

Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

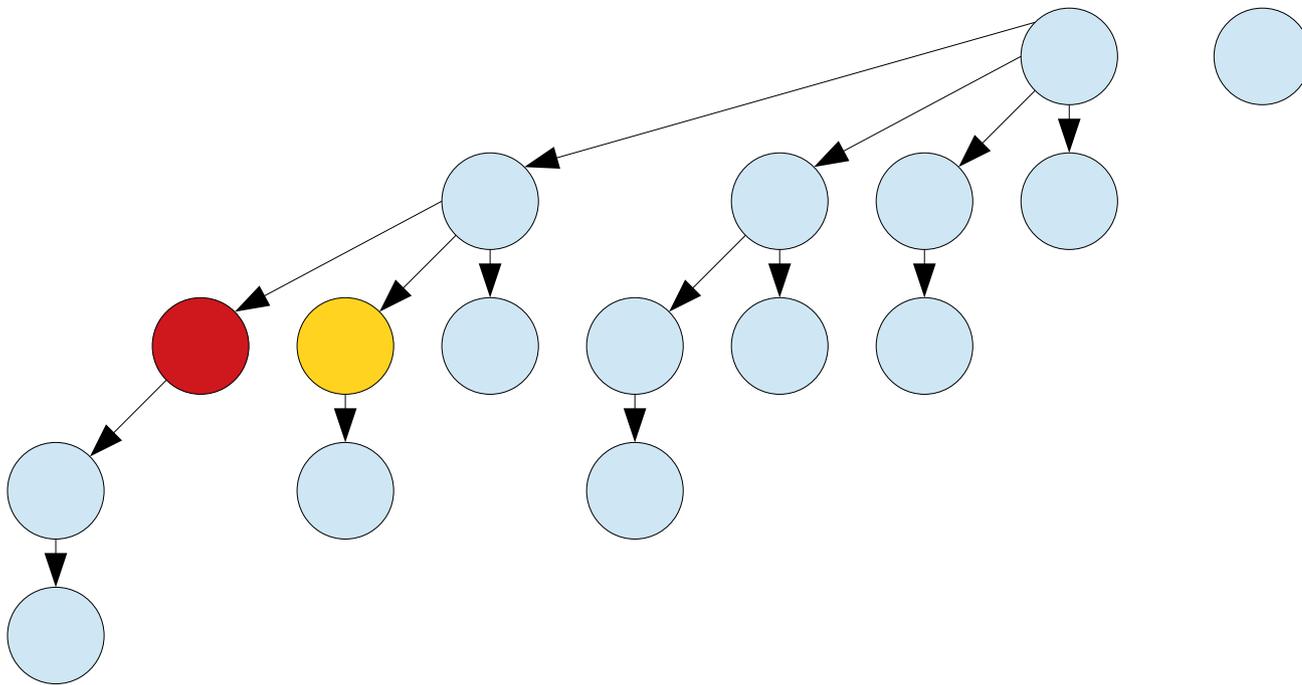


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

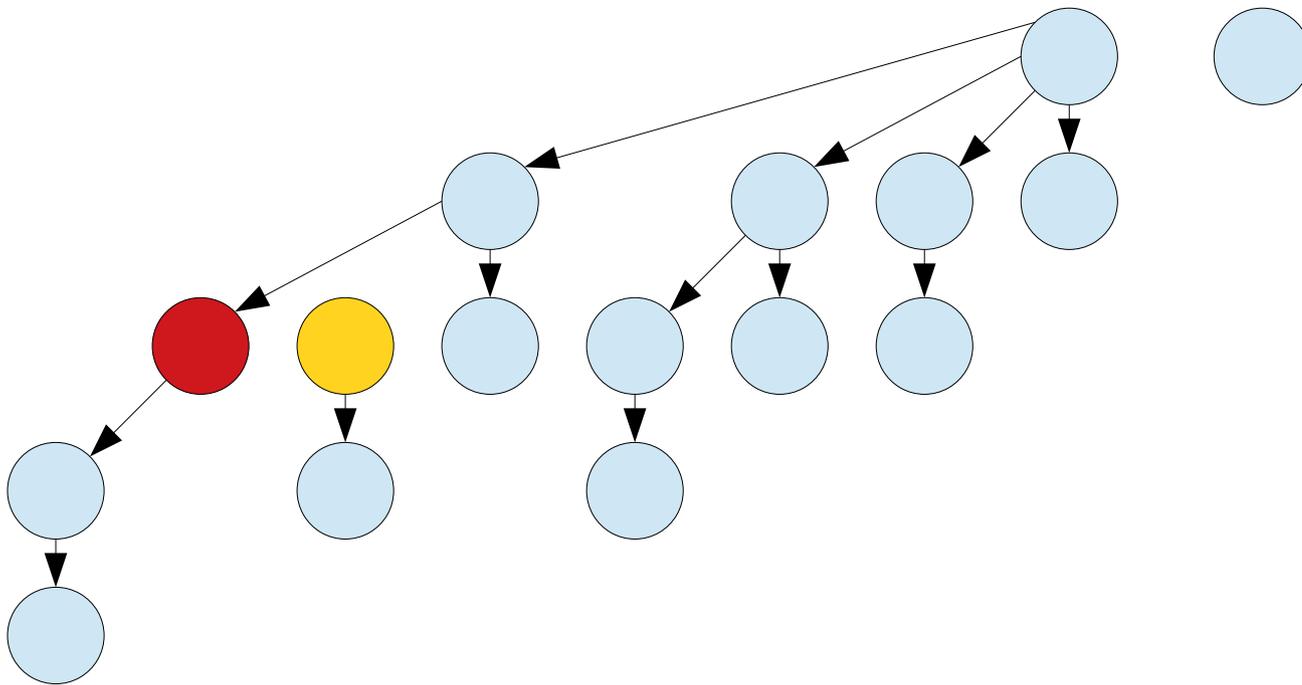


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

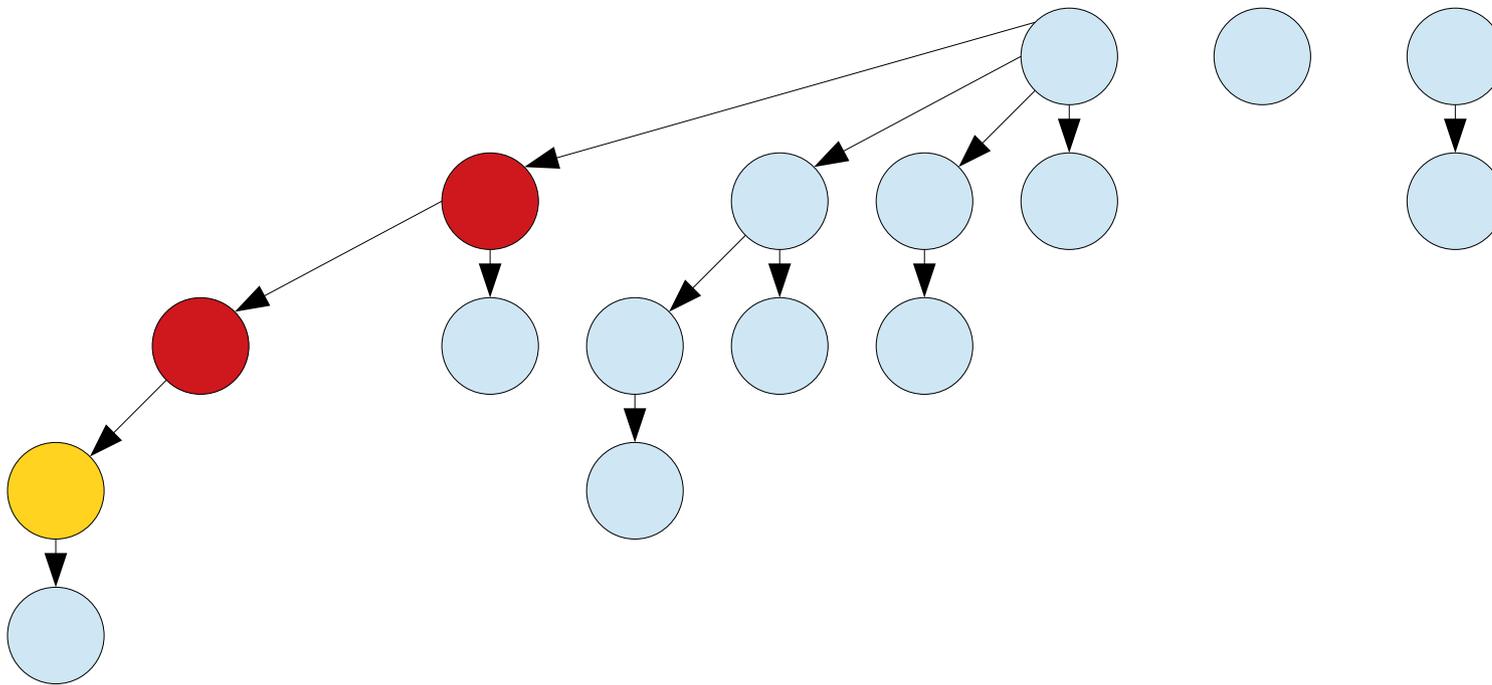


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

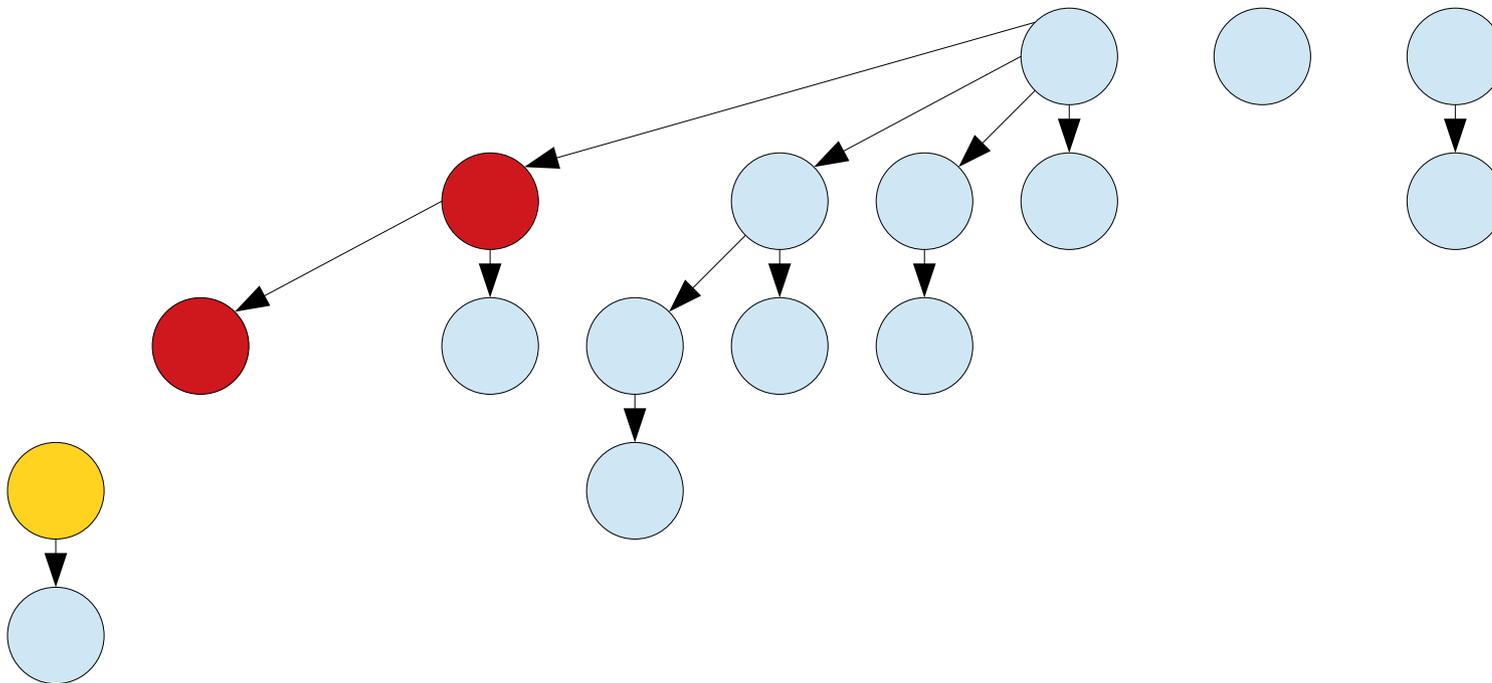


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

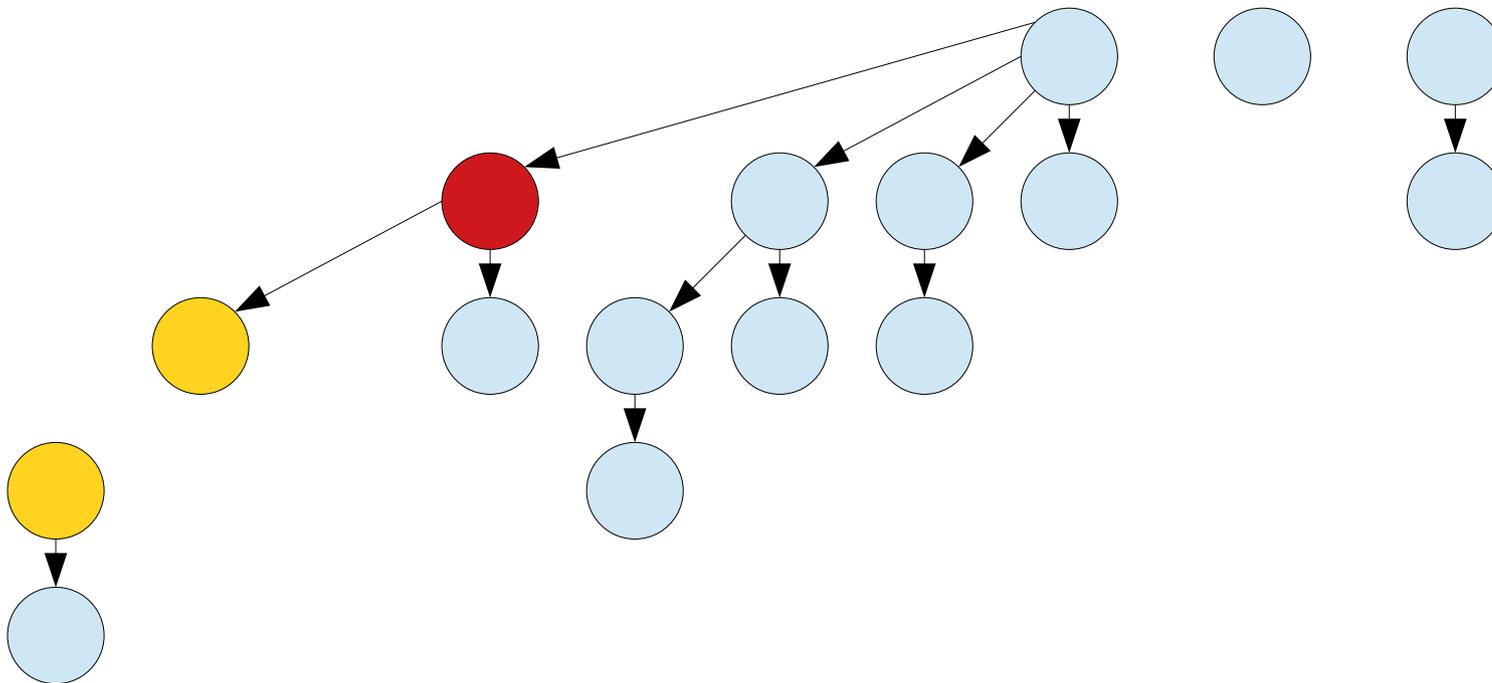


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

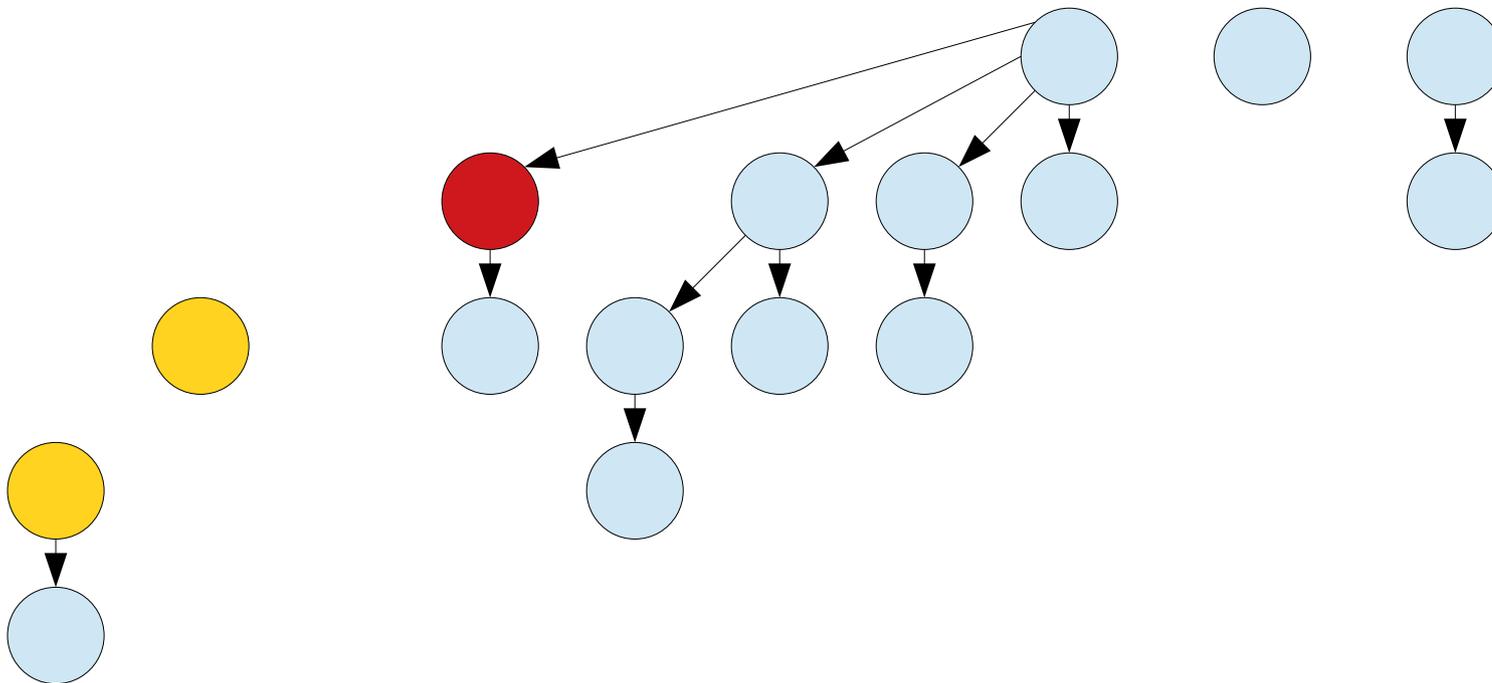


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

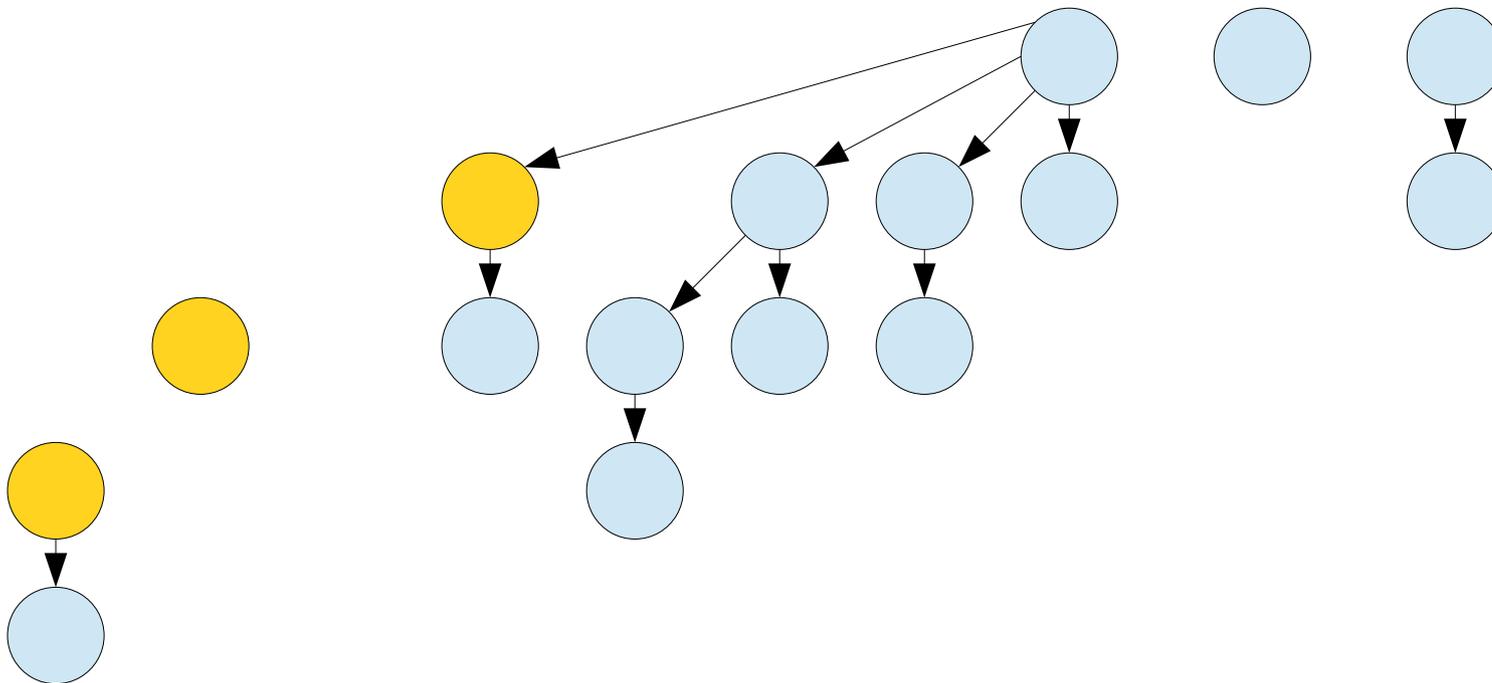


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

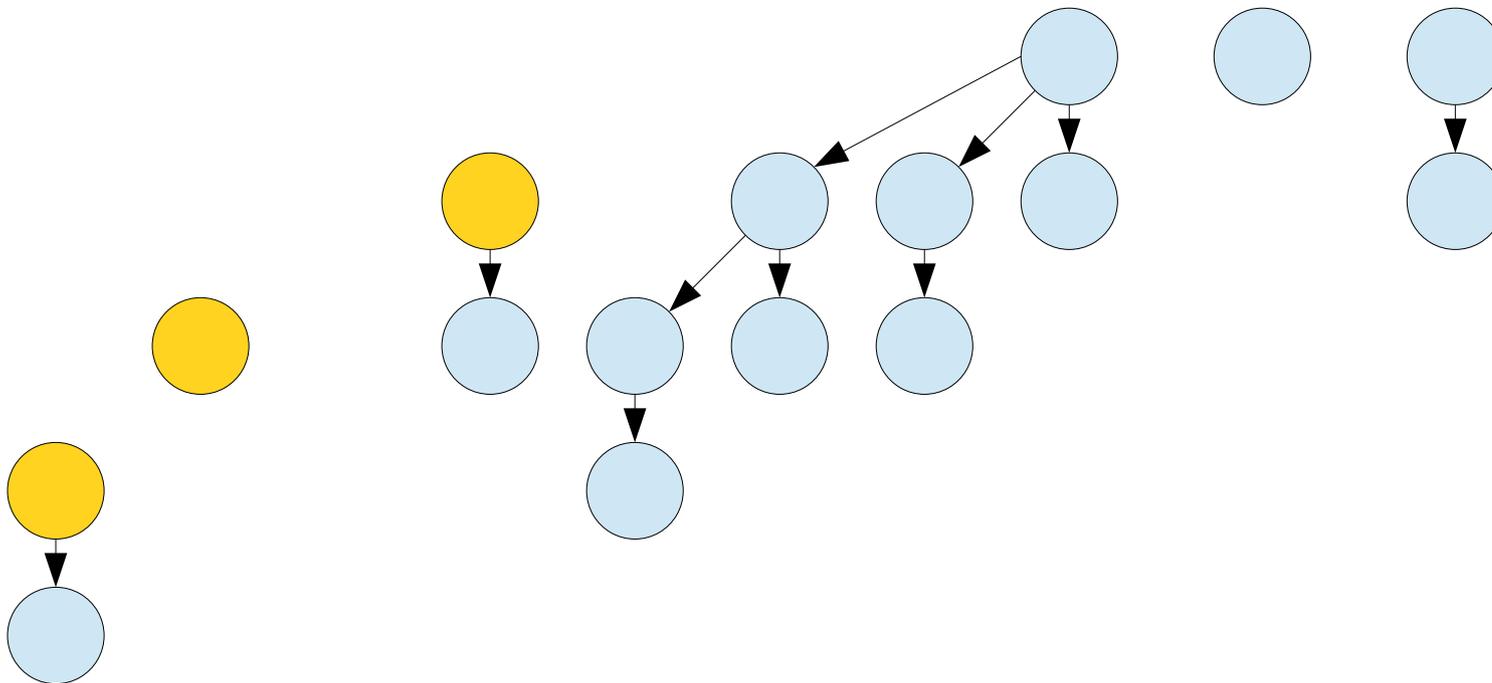


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

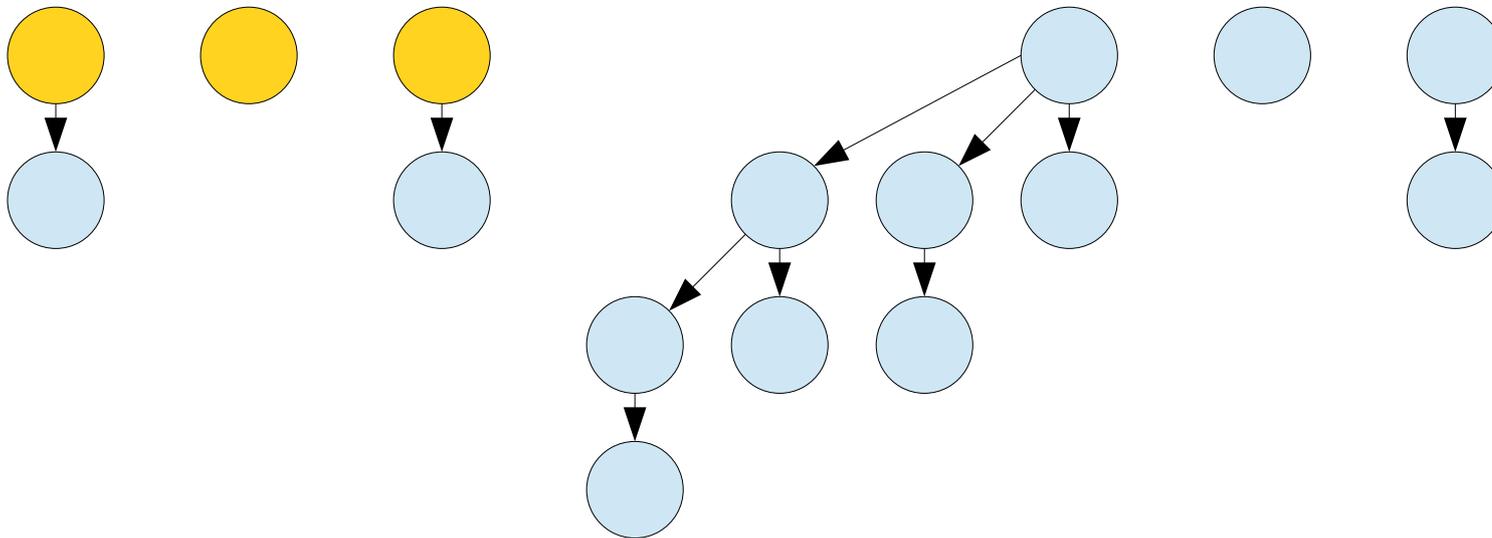


Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

$$\Phi = t + 2m$$

where

t is the number of trees and
 m is the number of marked nodes.

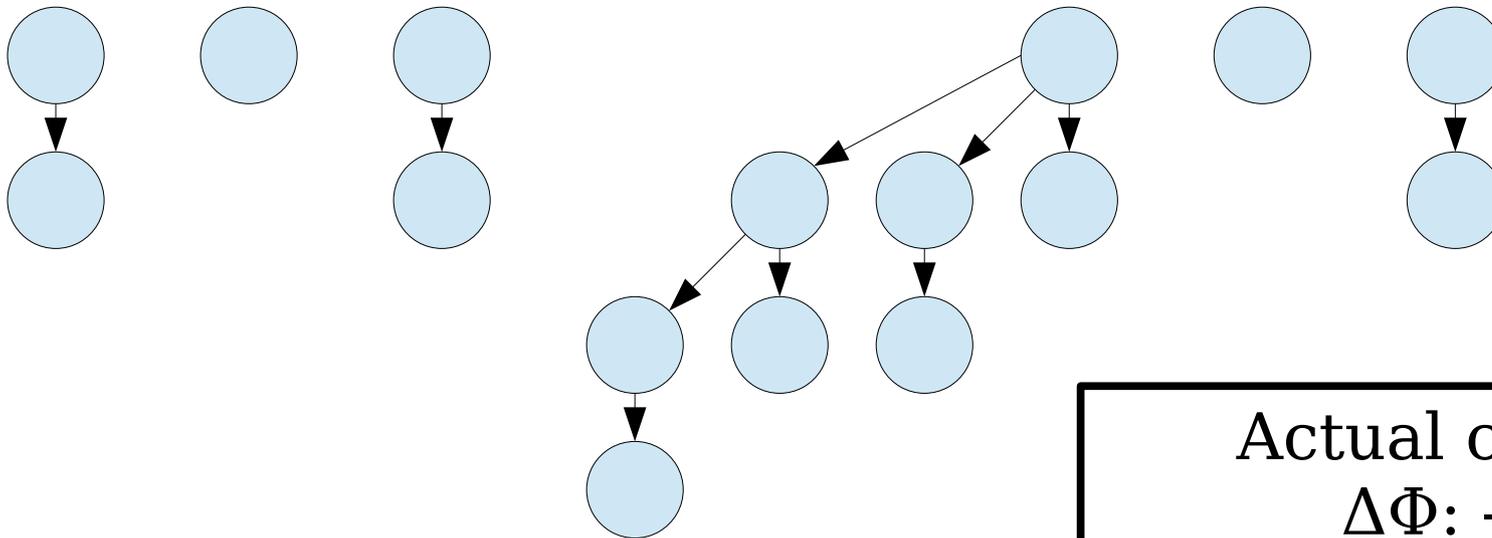

Actual cost: $O(C)$

$\Delta\Phi: -C + 1$

Amortized cost: **$O(1)$** .

Idea 2: Each *decrease-key* hurts twice: once in a cascading cut, and once in an *extract-min*.

The Overall Analysis

- Here's the final scorecard for the Fibonacci heap.
- These are excellent theoretical runtimes. There's minimal room for improvement!
- Later work made all these operations *worst-case efficient* at a significant increase in both runtime and intellectual complexity.

enqueue: $O(1)$

find-min: $O(1)$

meld: $O(1)$

extract-min: $O(\log n)^*$

decrease-key: $O(1)^*$


**amortized*

Representation Issues



Representing Trees

- The trees in a Fibonacci heap must be able to do the following:
 - During a merge: Add one tree as a child of the root of another tree.
 - During a cut: Cut a node from its parent in time $O(1)$.
- ***Claim:*** This is trickier than it looks.



Representing Trees

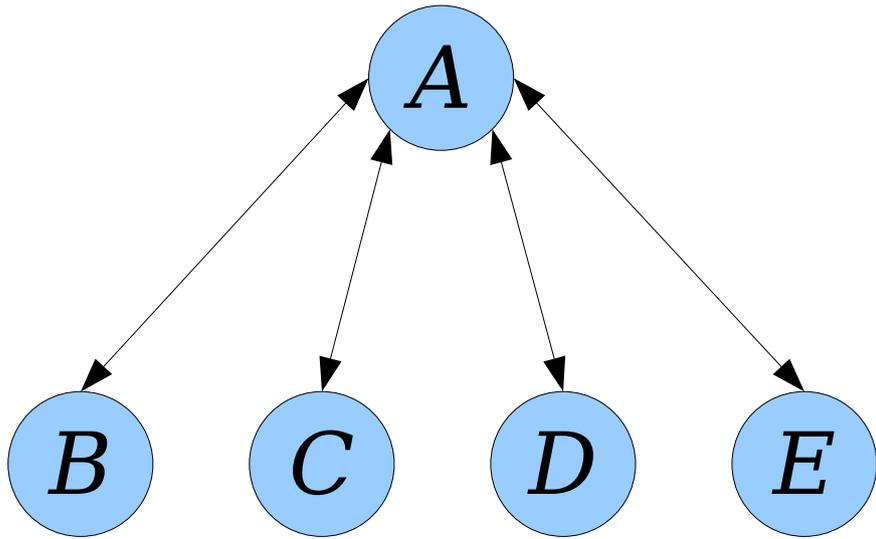



Representing Trees

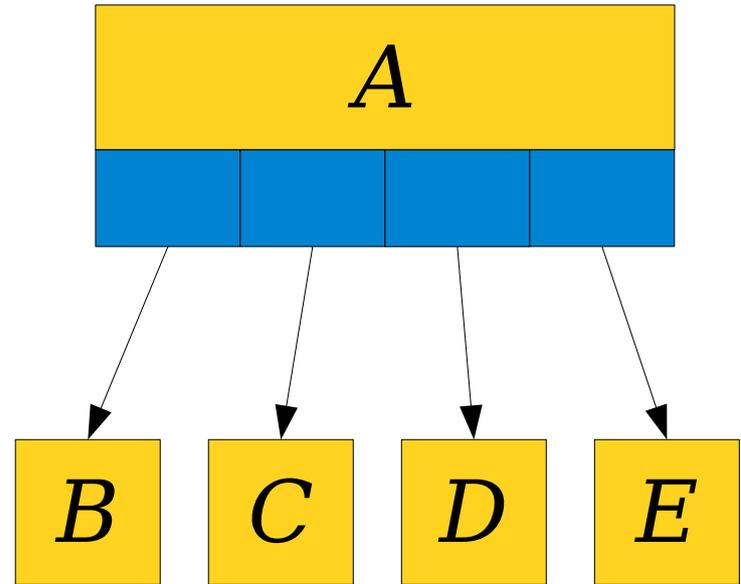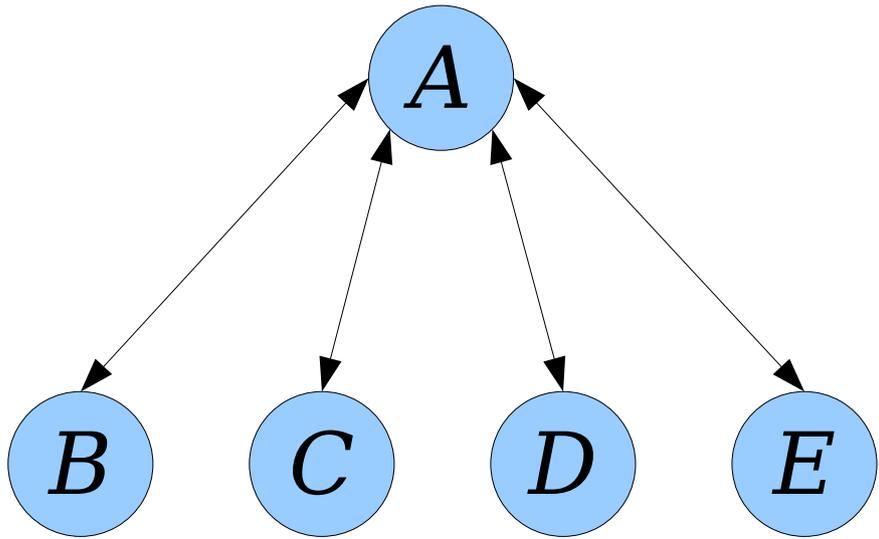



Representing Trees

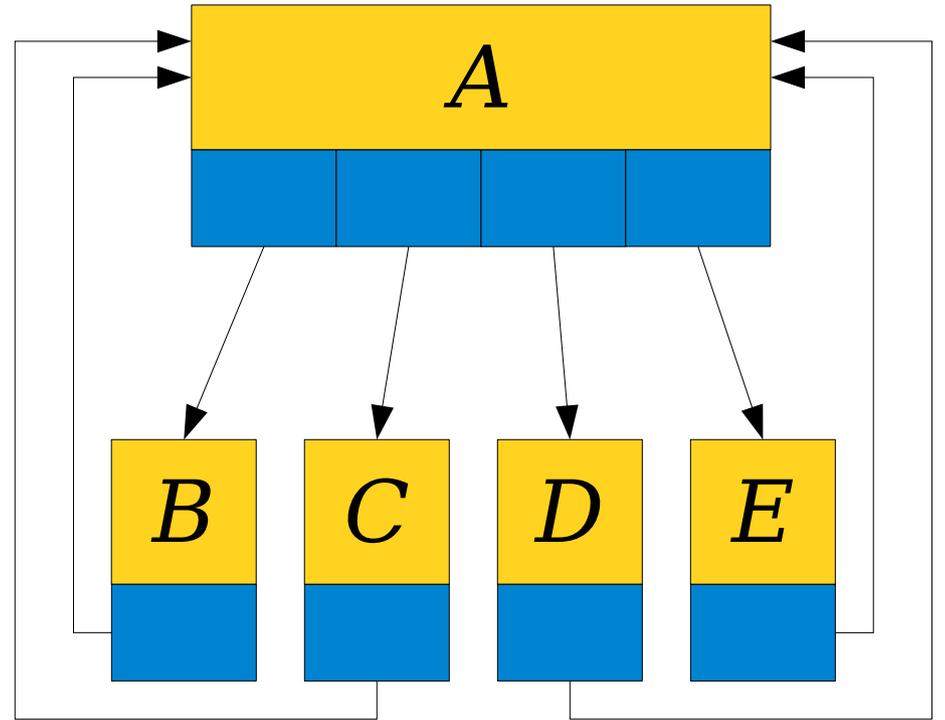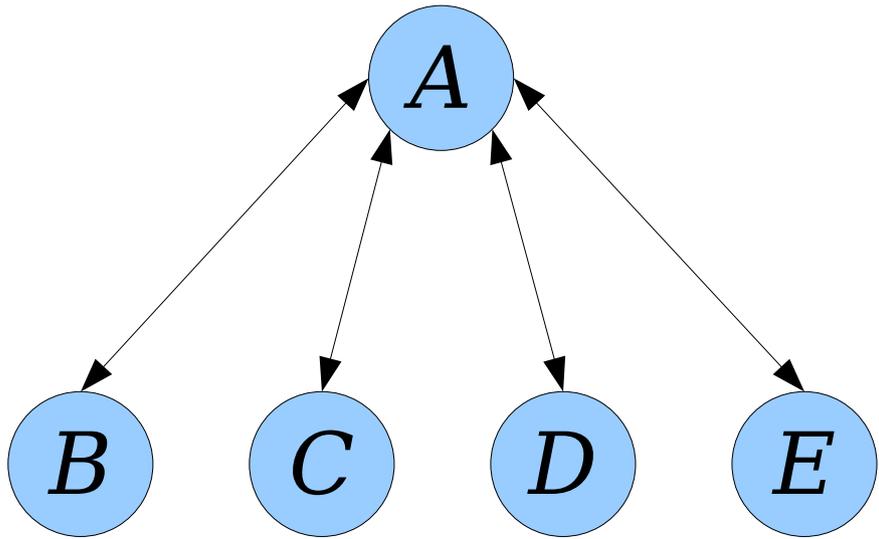



Representing Trees

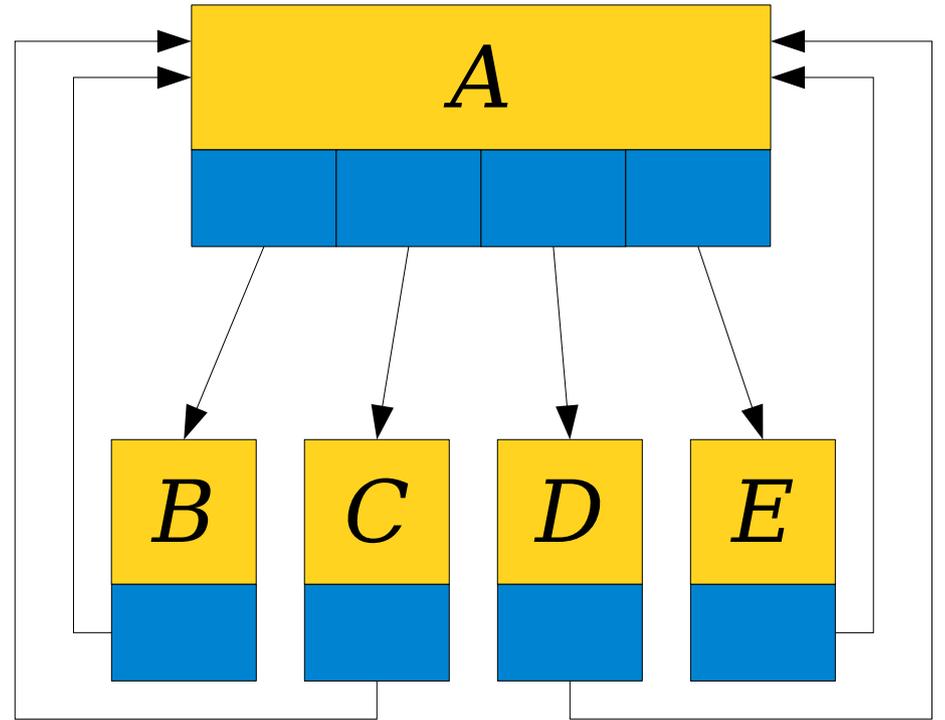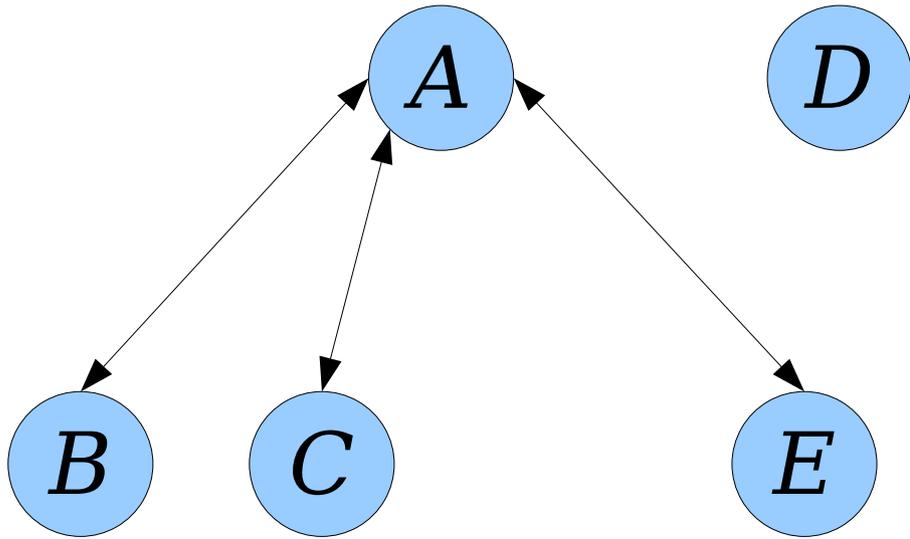



Representing Trees

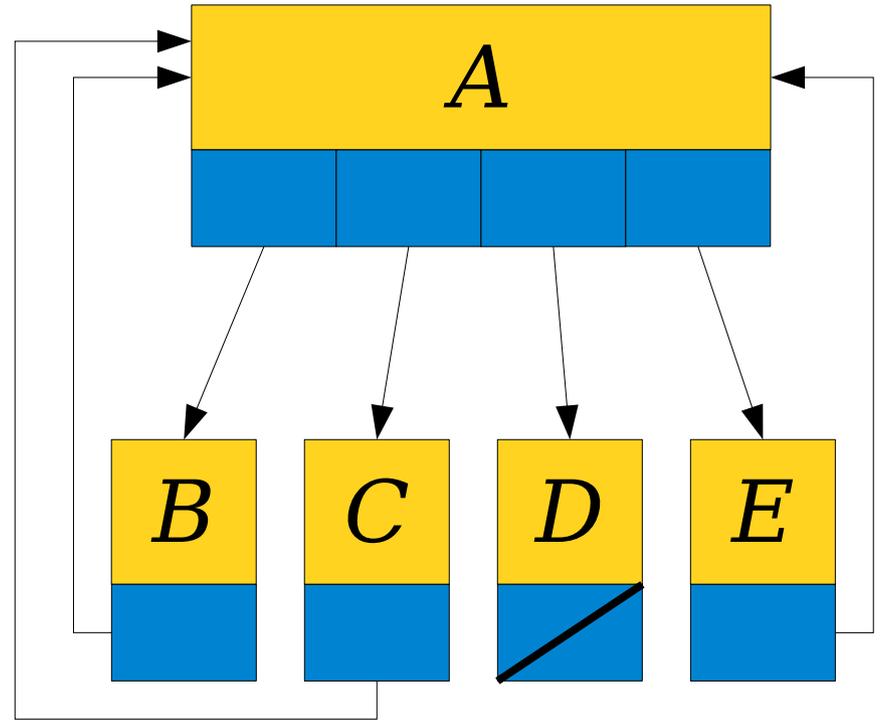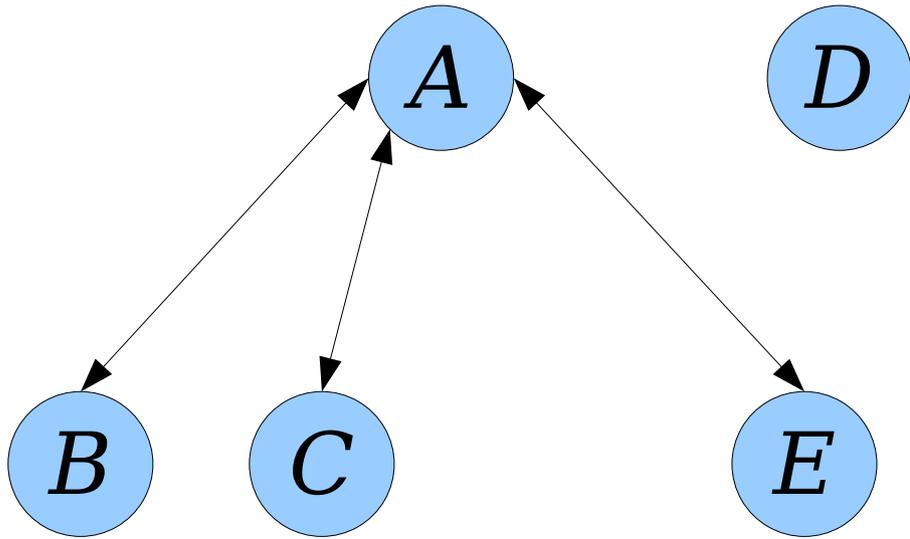

Representing Trees

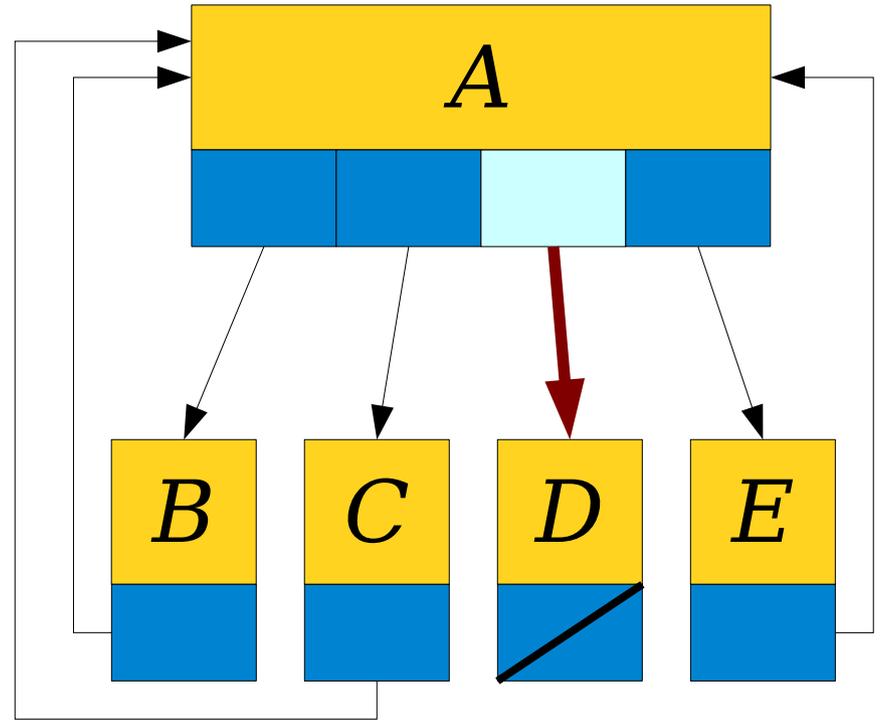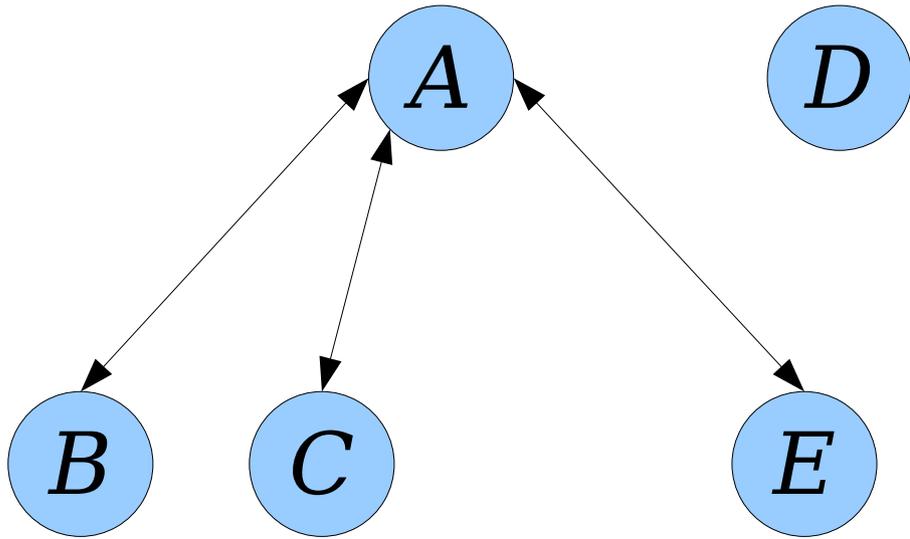

Representing Trees

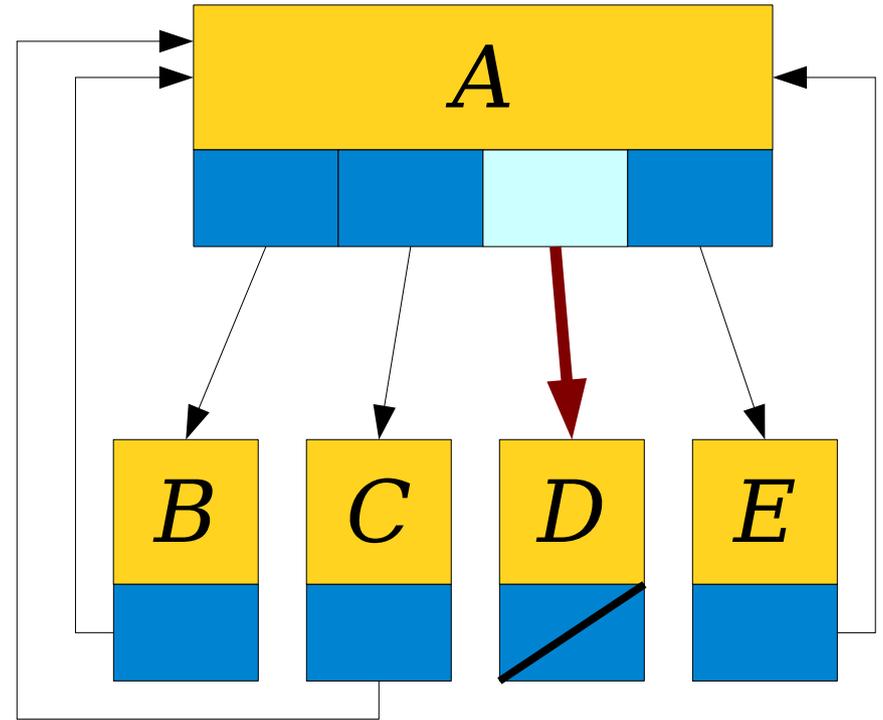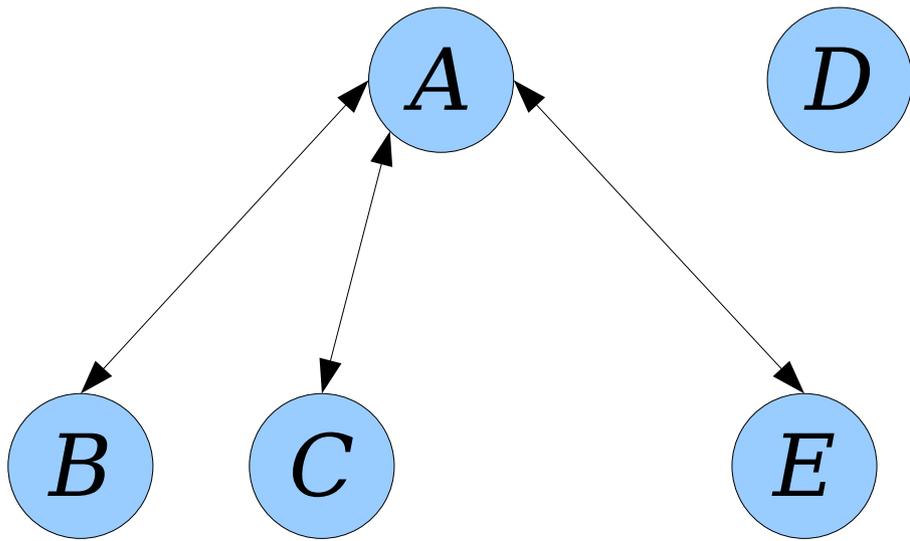

Finding this pointer might take time $\Theta(\log n)$!


The Solution

The Solution


This is going to be weird.

Sorry.


The Solution

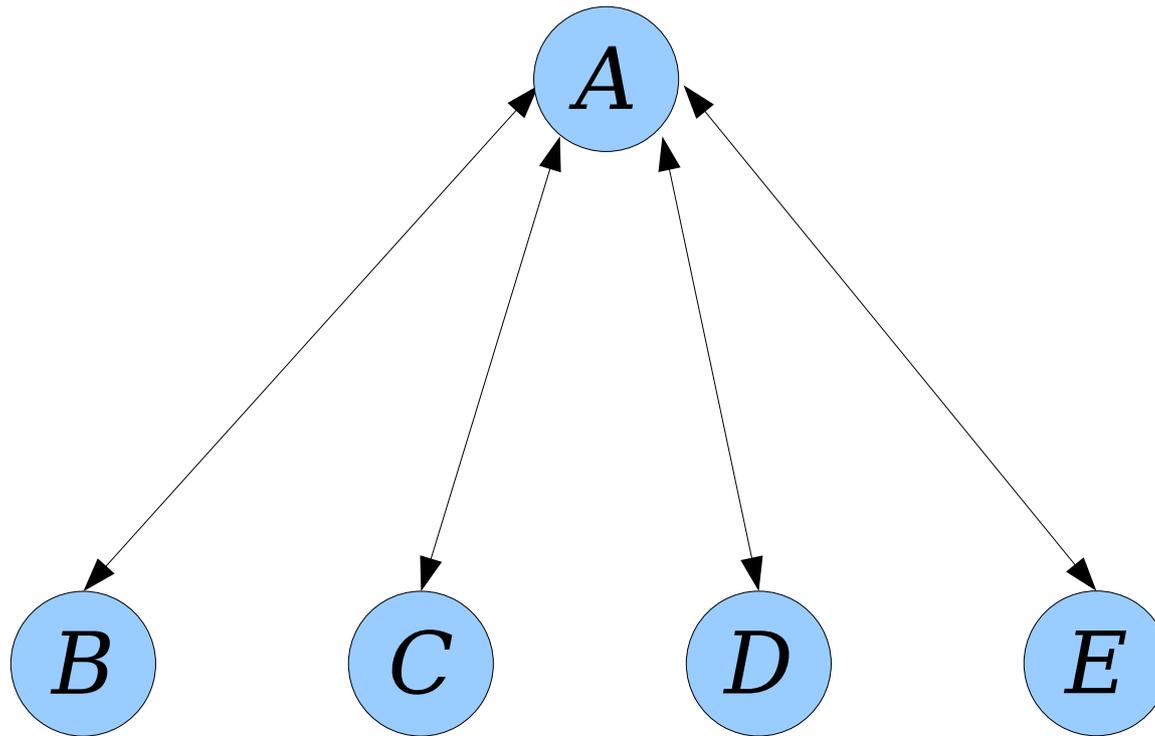


The Solution

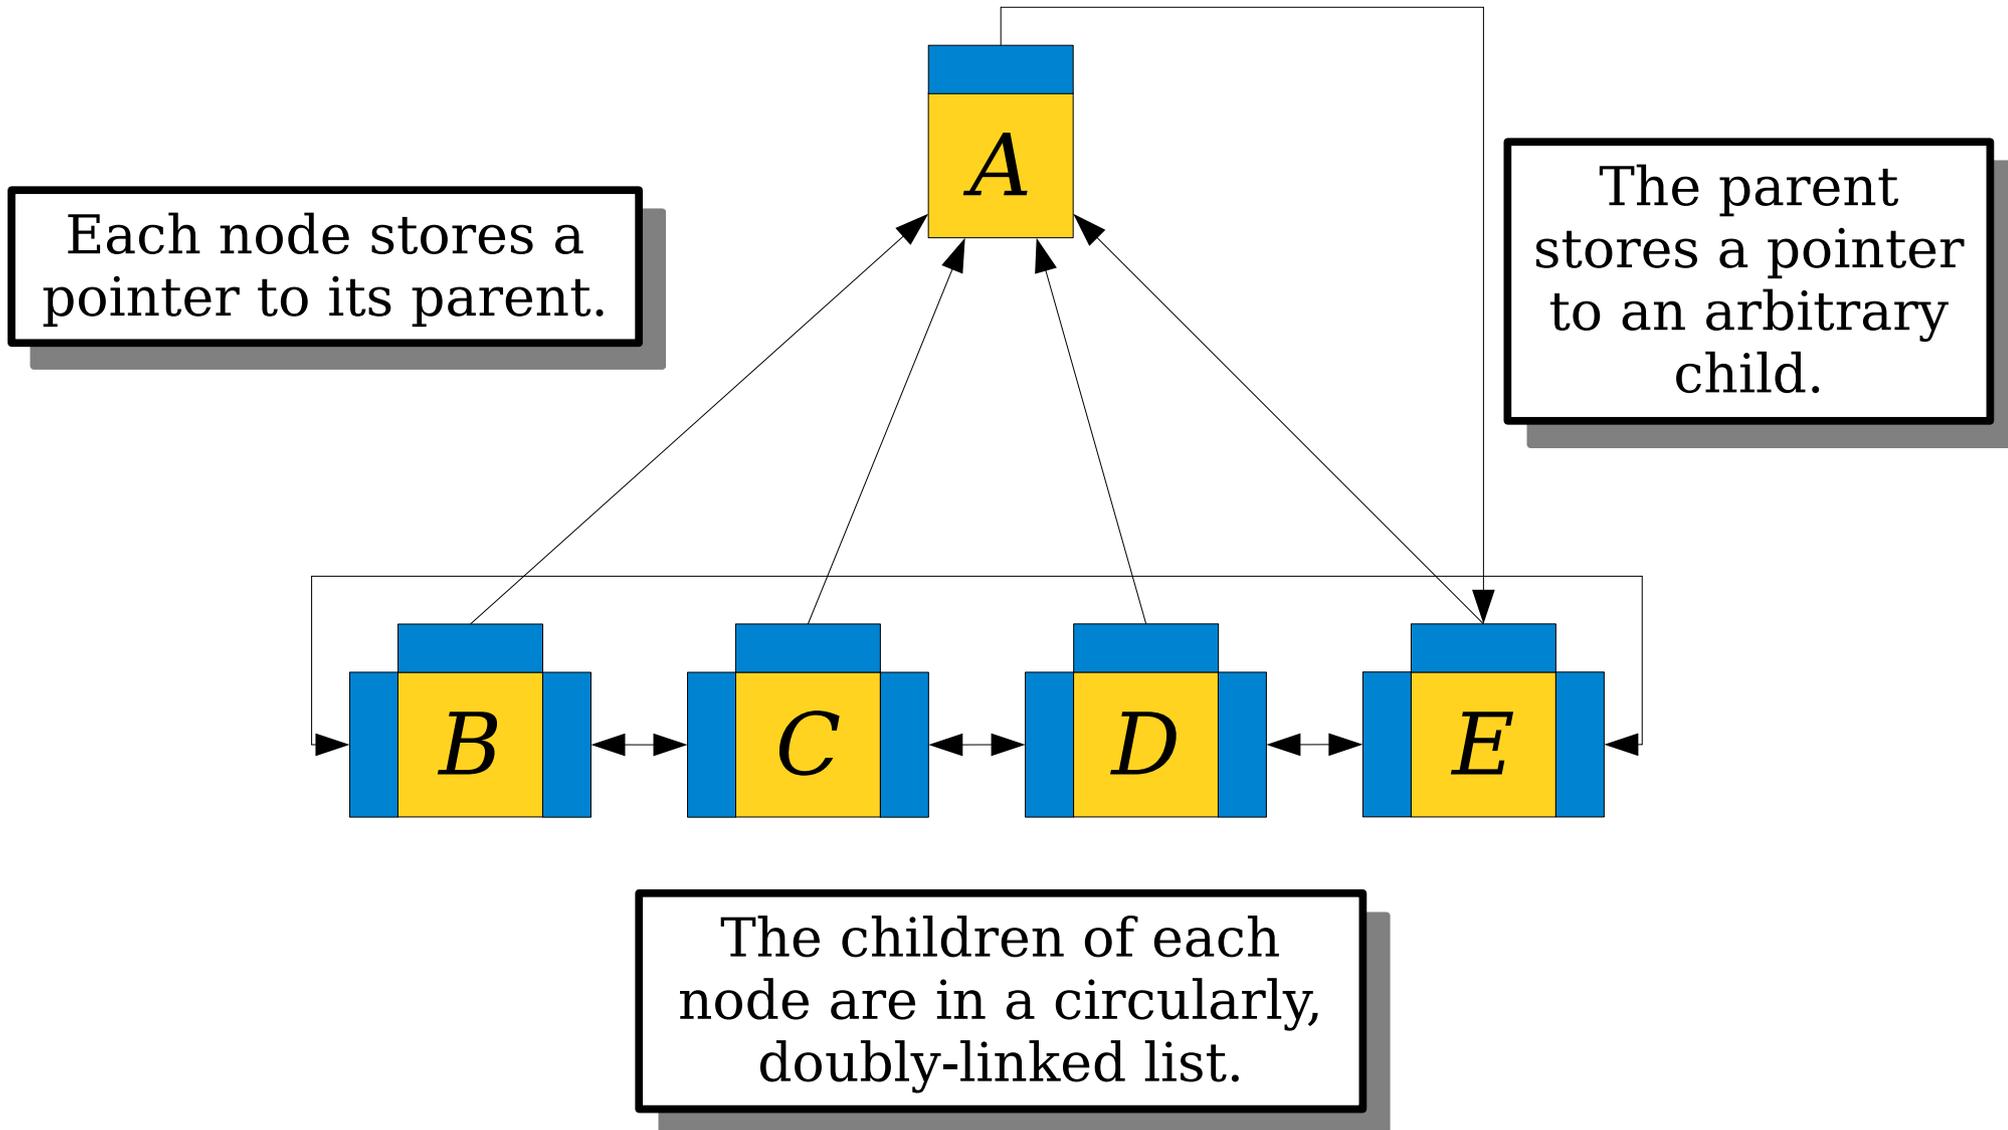


The Solution

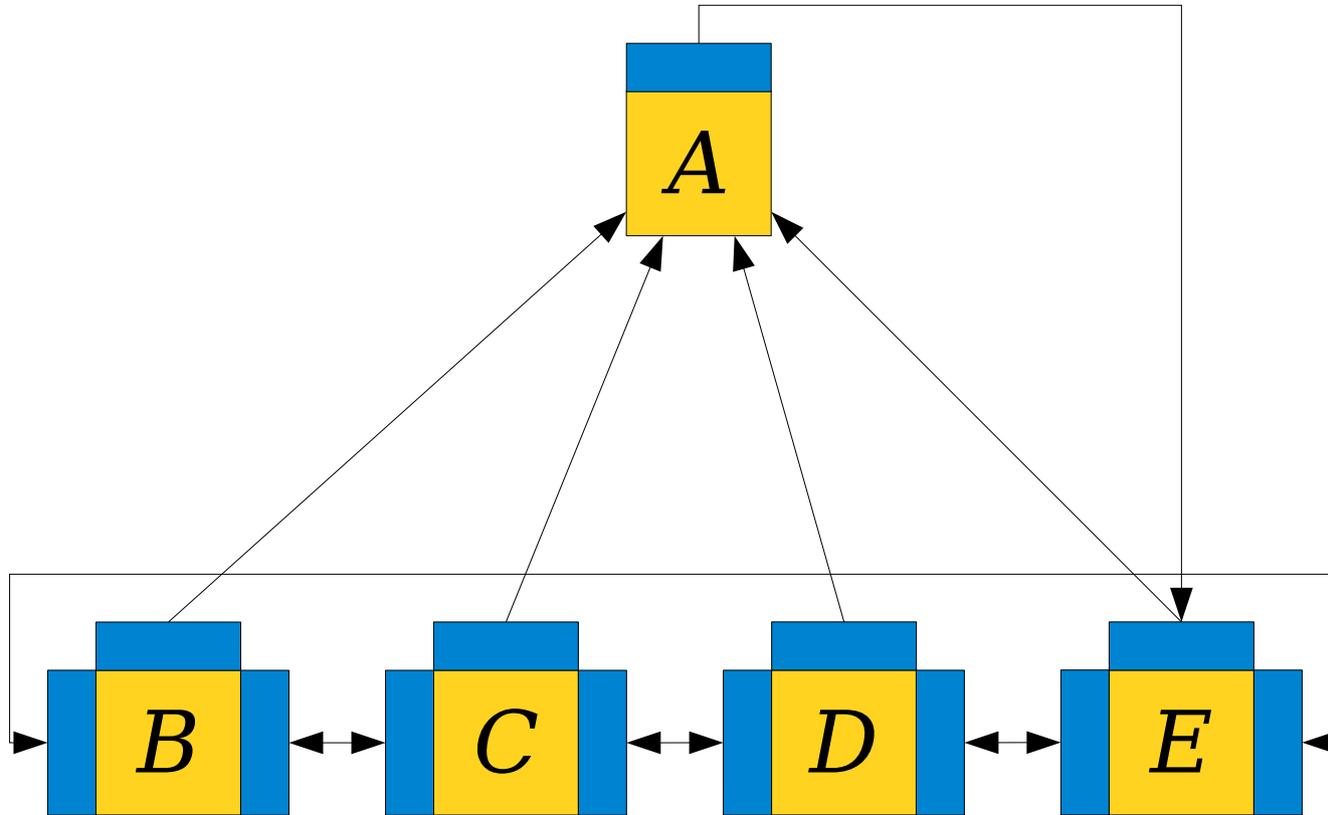


The Solution

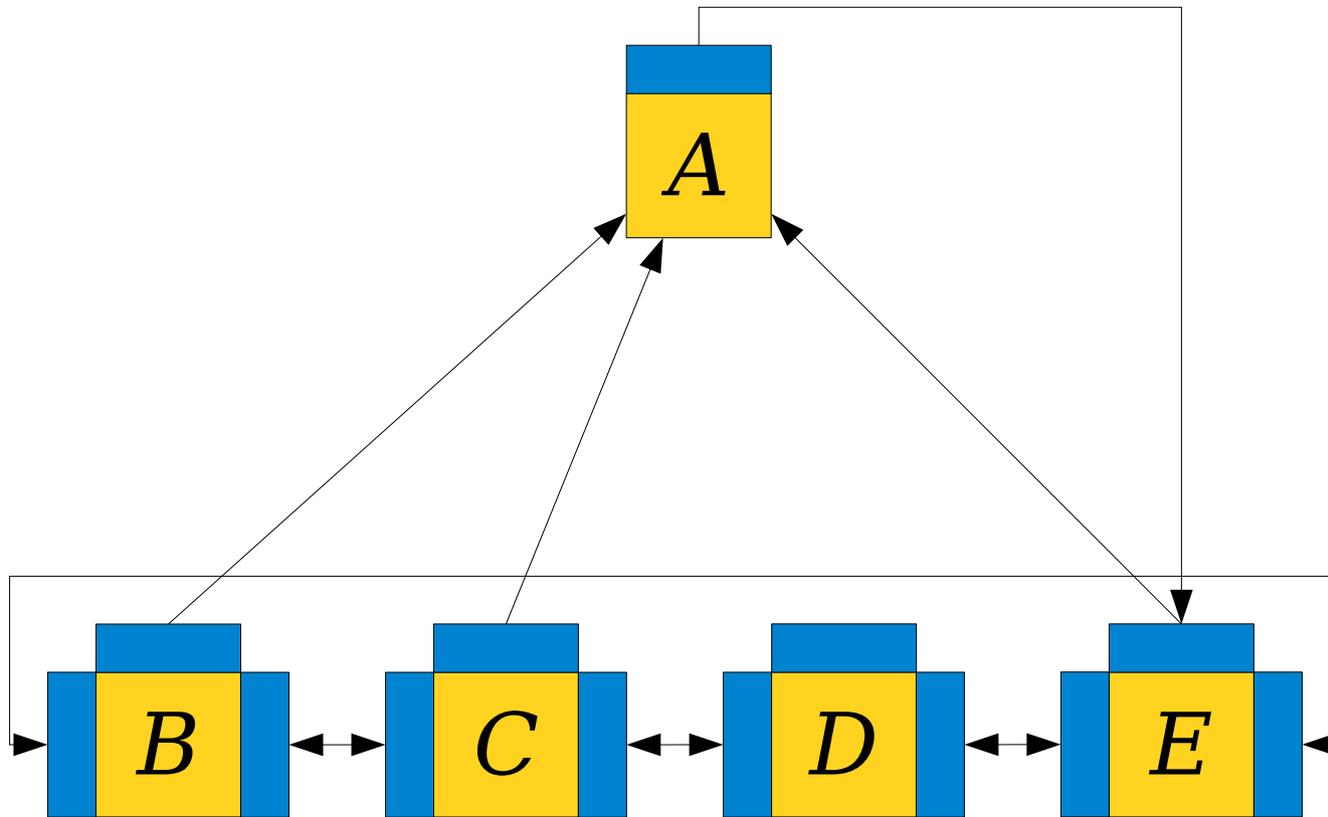

The Solution

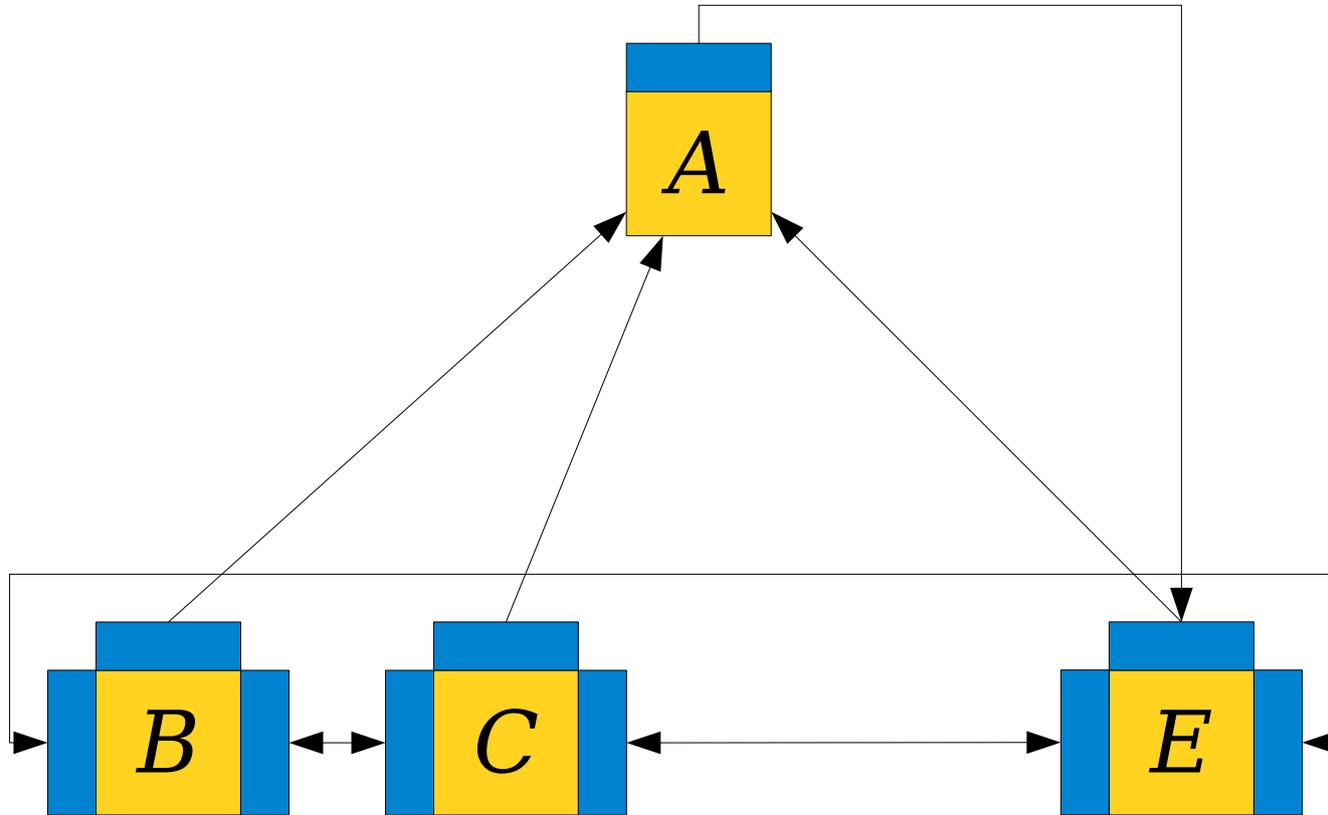


The Solution

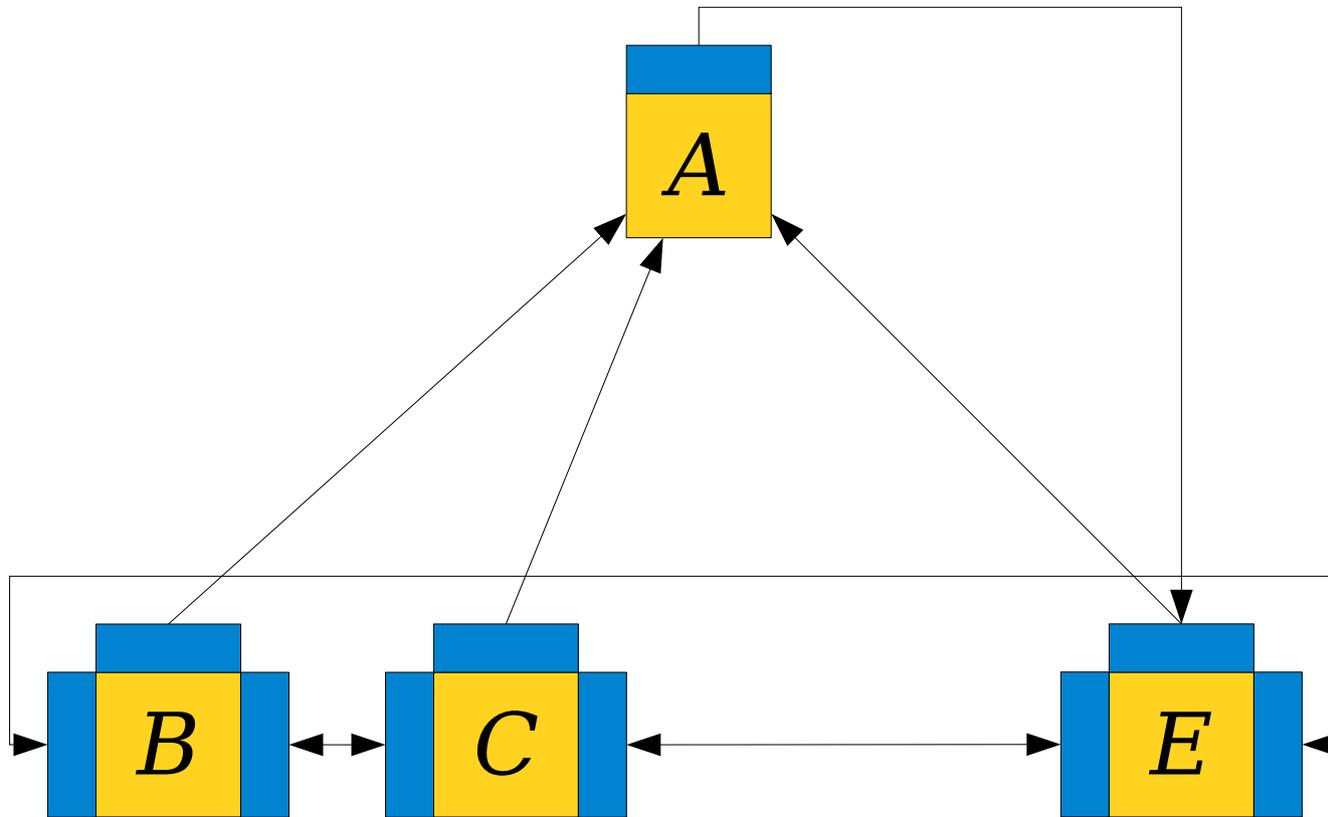


To cut a node from its parent, if it isn't the representative child, just splice it out of its linked list.


The Solution

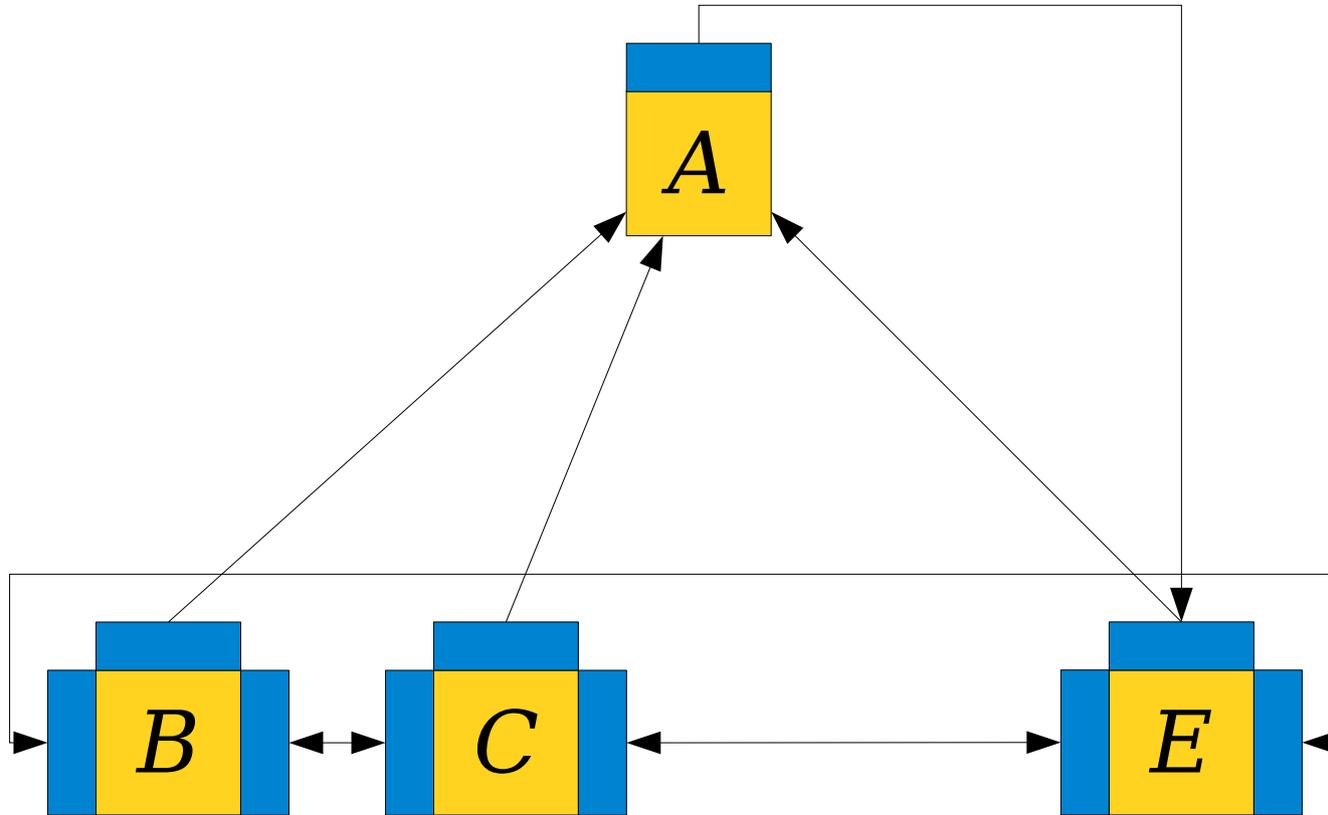


The Solution

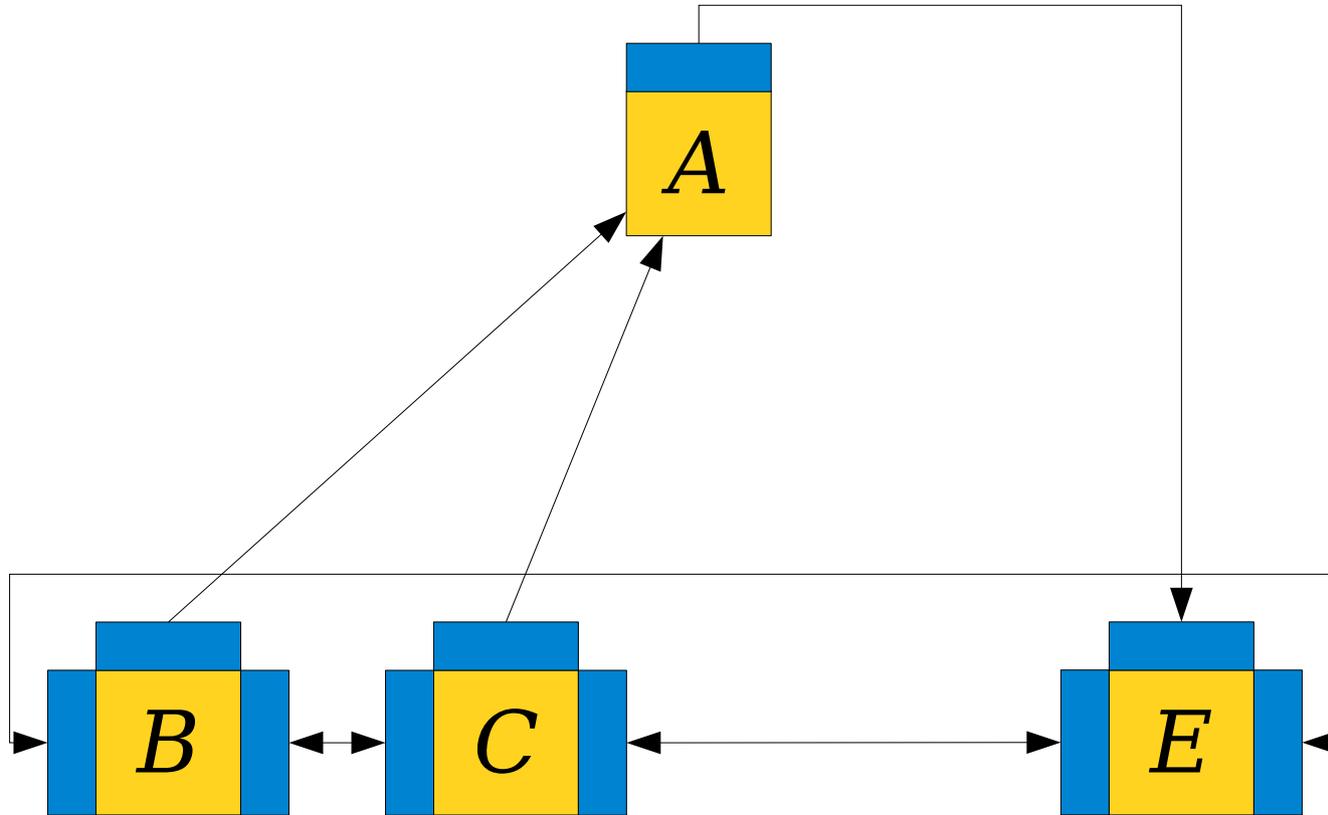


The Solution

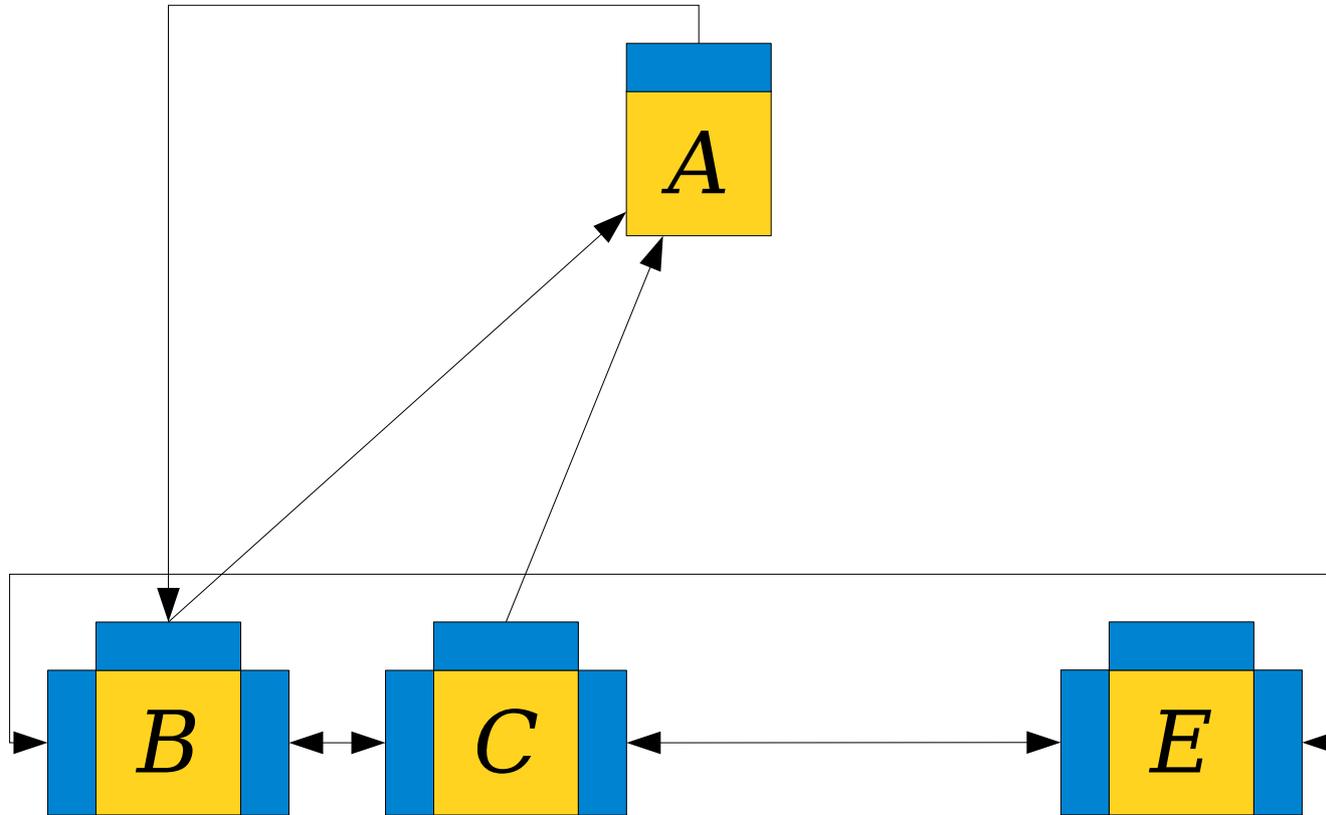

The Solution

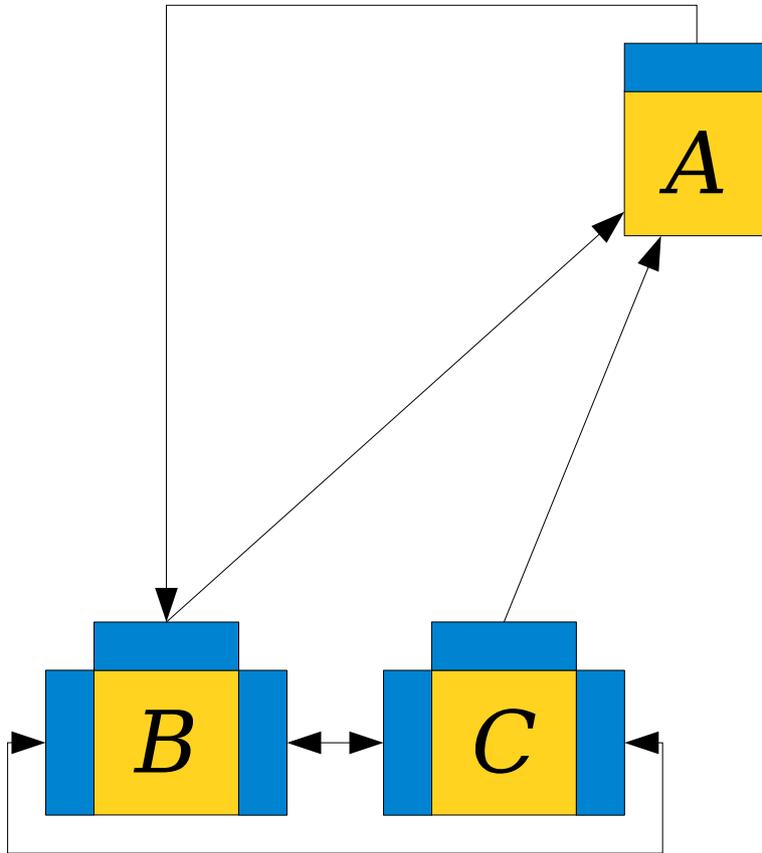

The Solution

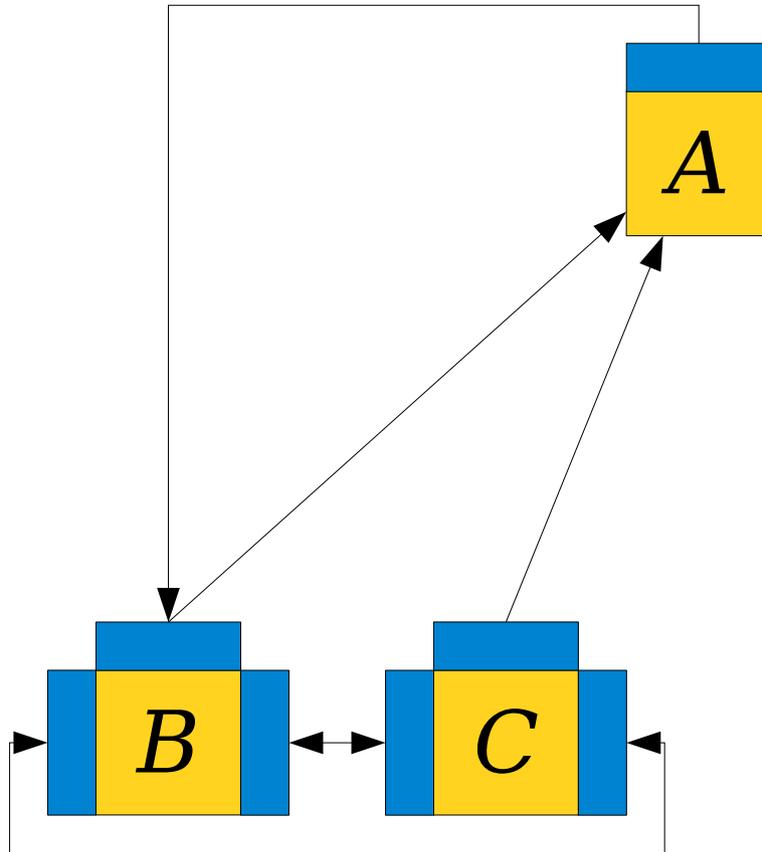

If it is the representative, change the parent's representative child to be one of the node's siblings.

Awful Linked Lists

- Trees are stored as follows:
 - Each node stores a pointer to *some* child.
 - Each node stores a pointer to its parent.
 - Each node is in a circularly-linked list of its siblings.
- The following possible are now possible in time $O(1)$:
 - Cut a node from its parent.
 - Add another child node to a node.

Fibonacci Heap Nodes

- Each node in a Fibonacci heap stores
 - A pointer to its parent.
 - A pointer to the next sibling.
 - A pointer to the previous sibling.
 - A pointer to an arbitrary child.
 - A bit for whether it's marked.
 - Its order.
 - Its key.
 - Its element.

In Practice

- In practice, the constant factors on Fibonacci heaps make it slower than other heaps, except on huge graphs or workflows with tons of *decrease-keys*.
- Why?
 - Huge memory requirements per node.
 - High constant factors on all operations.
 - Poor locality of reference and caching.

In Theory

- That said, Fibonacci heaps are worth knowing about for several reasons:
 - Clever use of a two-tiered potential function shows up in lots of data structures.
 - Implementation of *decrease-key* forms the basis for many other advanced priority queues.
 - Gives the theoretically optimal comparison-based implementation of Prim's and Dijkstra's algorithms.

More to Explore

- Since the development of Fibonacci heaps, there have been a number of other priority queues with similar runtimes.
 - In 1986, a powerhouse team (Fredman, Sedgwick, Sleator, and Tarjan) invented the **pairing heap**. It's much simpler than a Fibonacci heap, is fast in practice, but its runtime bounds are unknown!
 - In 2012, Brodal et al. invented the **strict Fibonacci heap**. It has the same time bounds as a Fibonacci heap, but in a *worst-case* rather than *amortized* sense.
 - In 2013, Chan invented the **quake heap**. It matches the asymptotic bounds of a Fibonacci heap but uses a totally different strategy.
- Also interesting to explore: if the weights on the edges in a graph are chosen from a continuous distribution, the expected number of **decrease-keys** in Dijkstra's algorithm is $O(n \log(m/n))$. That might counsel another heap structure!
- Also interesting to explore: binary heaps generalize to b -ary heaps, where each node has b children. Picking $b = \log(2 + m/n)$ makes Dijkstra and Prim run in time $O(m \log n / \log(m/n))$, which is $O(m)$ if $m = \Theta(n^{1+\varepsilon})$ for any $\varepsilon > 0$.
- Recent result: Dijkstra's algorithm with Fibonacci heaps can be combined with other data structures to be **instance optimal** for single-source shortest paths; *any* algorithm for solving SSSP is at most a constant factor faster than Dijkstra's plus the modified heap.

Upcoming Topics!

Hypergraph Cores and Peeling

Major improvements to hash tables, databases, and filters.

Cute Tricks with Integers

Harnessing latent parallelism that was there all along.

Data Structures in 2+ Dimensions

Searching in polygons, hypercubes, etc.

The Quest for the Best BST

Building BSTs that are “better-than-balanced.”

Dynamic Graphs

Analyzing graphs as they change in real-time.

Modern Hashing

Breakthroughs by a CS166 alum!

Stringy Thingies

Algorithms for text search and genomics.

Something Else?

What do you want to learn?

Next Time

- ***Disjoint-Set Forests***
 - Tracking what's connected in a graph.
- ***Compression Functions***
 - Iteratively making things smaller.
- ***Analyzing Disjoint-Set Forests***
 - With a beautiful final result!