

CHAPTER

18

# Semantic Role Labeling

Sometime between the 7th and 4th centuries BCE, the Indian grammarian Pāṇini<sup>1</sup> wrote a famous treatise on Sanskrit grammar, the Aṣṭādhyāyī (‘8 books’), a treatise that has been called “one of the greatest monuments of human intelligence” (Bloomfield, 1933, 11). The work describes the linguistics of the Sanskrit language in the form of 3959 sutras, each very efficiently (since it had to be memorized!) expressing part of a formal rule system that brilliantly prefigured modern mechanisms of formal language theory (Penn and Kiparsky, 2012). One set of rules, relevant to our discussion in this chapter, describes the *kāraḥ*, semantic relationships between a verb and noun arguments, roles like *agent*, *instrument*, or *destination*. Pāṇini’s work was the earliest we know of that tried to understand the linguistic realization of events and their participants. This task of understanding participants and their relationship to events—being able to answer the question “Who did what to whom” (and perhaps also “when and where”)—is a central question of natural language understanding.



Let’s move forward 2.5 millenia to the present and consider the very mundane goal of understanding text about a purchase of stock by XYZ Corporation. This purchasing event could take on a wide variety of surface forms. In the following sentences we see that it could be described by a verb (*sold*, *bought*) or a noun (*purchase*), and that XYZ Corp can be the syntactic subject (of *bought*), the indirect object (of *sold*), or in a genitive or noun compound relation (with the noun *purchase*) despite having notationally the same role in all of them:

- XYZ corporation bought the stock.
- They sold the stock to XYZ corporation.
- The stock was bought by XYZ corporation.
- The purchase of the stock by XYZ corporation...
- The stock purchase by XYZ corporation...

In this chapter we introduce a level of representation that lets us capture the commonality between these sentences. We will be able to represent the fact that there was a purchase event, that the participants in this event were XYZ Corp and some stock, and that XYZ Corp played a specific role, the role of acquiring the stock.

We call this shallow semantic representation level **semantic roles**. Semantic roles are representations that express the abstract role that arguments of a predicate can take in the event; these can be very specific, like the BUYER, abstract like the AGENT, or super-abstract (the PROTO-AGENT). These roles can both represent general semantic properties of the arguments and also express their likely relationship to the syntactic role of the argument in the sentence. AGENTS tend to be the subject of

<sup>1</sup> Figure shows a birch bark manuscript from Kashmir of the Rupavatra, a grammatical textbook based on the Sanskrit grammar of Panini. Image from the Wellcome Collection.

an active sentence, THEMES the direct object, and so on. These relations are codified in databases like PropBank and FrameNet. We'll introduce **semantic role labeling**, the task of assigning roles to the constituents or phrases in sentences. We'll also discuss **selectional restrictions**, the semantic sortal restrictions or preferences that each individual predicate can express about its potential arguments, such as the fact that the theme of the verb *eat* is generally something edible. Along the way, we'll describe the various ways these representations can help in language understanding tasks like question answering and machine translation.

## 18.1 Semantic Roles

Consider how in Chapter 14 we represented the meaning of arguments for sentences like these:

(18.1) Sasha broke the window.

(18.2) Pat opened the door.

A neo-Davidsonian event representation of these two sentences would be

$$\begin{aligned} &\exists e, x, y \textit{ Breaking}(e) \wedge \textit{ Breaker}(e, \textit{ Sasha}) \\ &\quad \wedge \textit{ BrokenThing}(e, y) \wedge \textit{ Window}(y) \\ &\exists e, x, y \textit{ Opening}(e) \wedge \textit{ Opener}(e, \textit{ Pat}) \\ &\quad \wedge \textit{ OpenedThing}(e, y) \wedge \textit{ Door}(y) \end{aligned}$$

deep roles

In this representation, the roles of the subjects of the verbs *break* and *open* are *Breaker* and *Opener* respectively. These **deep roles** are specific to each event; *Breaking* events have *Breakers*, *Opening* events have *Openers*, and so on.

If we are going to be able to answer questions, perform inferences, or do any further kinds of natural language understanding of these events, we'll need to know a little more about the semantics of these arguments. *Breakers* and *Openers* have something in common. They are both volitional actors, often animate, and they have direct causal responsibility for their events.

thematic roles  
agents

**Thematic roles** are a way to capture this semantic commonality between *Breakers* and *Openers*. We say that the subjects of both these verbs are **agents**. Thus, AGENT is the thematic role that represents an abstract idea such as volitional causation. Similarly, the direct objects of both these verbs, the *BrokenThing* and *OpenedThing*, are both prototypically inanimate objects that are affected in some way by the action.

theme

The semantic role for these participants is **theme**.

Although thematic roles are one of the oldest linguistic models, as we saw above, their modern formulation is due to Fillmore (1968) and Gruber (1965). Although there is no universally agreed-upon set of roles, Figs. 18.1 and 18.2 list some thematic roles that have been used in various computational papers, together with rough definitions and examples. Most thematic role sets have about a dozen roles, but we'll see sets with smaller numbers of roles with even more abstract meanings, and sets with very large numbers of roles that are specific to situations. We'll use the general term **semantic roles** for all sets of roles, whether small or large.

semantic roles

Thematic Role	Definition
AGENT	The volitional causer of an event
EXPERIENCER	The experiencer of an event
FORCE	The non-volitional causer of the event
THEME	The participant most directly affected by an event
RESULT	The end product of an event
CONTENT	The proposition or content of a propositional event
INSTRUMENT	An instrument used in an event
BENEFICIARY	The beneficiary of an event
SOURCE	The origin of the object of a transfer event
GOAL	The destination of an object of a transfer event

**Figure 18.1** Some commonly used thematic roles with their definitions.

Thematic Role	Example
AGENT	<i>The waiter</i> spilled the soup.
EXPERIENCER	<i>John</i> has a headache.
FORCE	<i>The wind</i> blows debris from the mall into our yards.
THEME	Only after Benjamin Franklin broke <i>the ice</i> ...
RESULT	The city built a <i>regulation-size baseball diamond</i> ...
CONTENT	Mona asked “ <i>You met Mary Ann at a supermarket?</i> ”
INSTRUMENT	He poached catfish, stunning them <i>with a shocking device</i> ...
BENEFICIARY	Whenever Ann Callahan makes hotel reservations <i>for her boss</i> ...
SOURCE	I flew in <i>from Boston</i> .
GOAL	I drove <i>to Portland</i> .

**Figure 18.2** Some prototypical examples of various thematic roles.

## 18.2 Diathesis Alternations

The main reason computational systems use semantic roles is to act as a shallow meaning representation that can let us make simple inferences that aren’t possible from the pure surface string of words, or even from the parse tree. To extend the earlier examples, if a document says that *Company A acquired Company B*, we’d like to know that this answers the query *Was Company B acquired?* despite the fact that the two sentences have very different surface syntax. Similarly, this shallow semantics might act as a useful intermediate language in machine translation.

Semantic roles thus help generalize over different surface realizations of predicate arguments. For example, while the AGENT is often realized as the subject of the sentence, in other cases the THEME can be the subject. Consider these possible realizations of the thematic arguments of the verb *break*:

(18.3) *John broke the window.*

AGENT        THEME

(18.4) *John broke the window with a rock.*

AGENT        THEME        INSTRUMENT

(18.5) *The rock broke the window.*

INSTRUMENT        THEME

(18.6) *The window broke.*

THEME

(18.7) *The window was broken by John.*

THEME                                AGENT

These examples suggest that *break* has (at least) the possible arguments AGENT, THEME, and INSTRUMENT. The set of thematic role arguments taken by a verb is often called the **thematic grid**,  $\theta$ -grid, or **case frame**. We can see that there are (among others) the following possibilities for the realization of these arguments of *break*:

AGENT/Subject, THEME/Object  
 AGENT/Subject, THEME/Object, INSTRUMENT/PP<sub>with</sub>  
 INSTRUMENT/Subject, THEME/Object  
 THEME/Subject

It turns out that many verbs allow their thematic roles to be realized in various syntactic positions. For example, verbs like *give* can realize the THEME and GOAL arguments in two different ways:

- (18.8) a. *Doris gave the book to Cary.*  
           AGENT      THEME      GOAL  
       b. *Doris gave Cary the book.*  
           AGENT      GOAL THEME

These multiple argument structure realizations (the fact that *break* can take AGENT, INSTRUMENT, or THEME as subject, and *give* can realize its THEME and GOAL in either order) are called **verb alternations** or **diathesis alternations**. The alternation we showed above for *give*, the **dative alternation**, seems to occur with particular semantic classes of verbs, including “verbs of future having” (*advance, allocate, offer, owe*), “send verbs” (*forward, hand, mail*), “verbs of throwing” (*kick, pass, throw*), and so on. Levin (1993) lists for 3100 English verbs the semantic classes to which they belong (47 high-level classes, divided into 193 more specific classes) and the various alternations in which they participate. These lists of verb classes have been incorporated into the online resource VerbNet (Kipper et al., 2000), which links each verb to both WordNet and FrameNet entries.

### 18.3 Semantic Roles: Problems with Thematic Roles

Representing meaning at the thematic role level seems like it should be useful in dealing with complications like diathesis alternations. Yet it has proved quite difficult to come up with a standard set of roles, and equally difficult to produce a formal definition of roles like AGENT, THEME, or INSTRUMENT.

For example, researchers attempting to define role sets often find they need to fragment a role like AGENT or THEME into many specific roles. Levin and Rappaport Hovav (2005) summarize a number of such cases, such as the fact there seem to be at least two kinds of INSTRUMENTS, *intermediary* instruments that can appear as subjects and *enabling* instruments that cannot:

- (18.9) a. The cook opened the jar with the new gadget.  
       b. The new gadget opened the jar.  
 (18.10) a. Shelly ate the sliced banana with a fork.  
       b. \*The fork ate the sliced banana.

In addition to the fragmentation problem, there are cases in which we’d like to reason about and generalize across semantic roles, but the finite discrete lists of roles don’t let us do this.

Finally, it has proved difficult to formally define the thematic roles. Consider the AGENT role; most cases of AGENTS are animate, volitional, sentient, causal, but any individual noun phrase might not exhibit all of these properties.

**semantic role** These problems have led to alternative **semantic role** models that use either many fewer or many more roles.

**proto-agent**  
**proto-patient** The first of these options is to define **generalized semantic roles** that abstract over the specific thematic roles. For example, PROTO-AGENT and PROTO-PATIENT are generalized roles that express roughly agent-like and roughly patient-like meanings. These roles are defined, not by necessary and sufficient conditions, but rather by a set of heuristic features that accompany more agent-like or more patient-like meanings. Thus, the more an argument displays agent-like properties (being volitionally involved in the event, causing an event or a change of state in another participant, being sentient or intentionally involved, moving) the greater the likelihood that the argument can be labeled a PROTO-AGENT. The more patient-like the properties (undergoing change of state, causally affected by another participant, stationary relative to other participants, etc.), the greater the likelihood that the argument can be labeled a PROTO-PATIENT.

The second direction is instead to define semantic roles that are specific to a particular verb or a particular group of semantically related verbs or nouns.

In the next two sections we describe two commonly used lexical resources that make use of these alternative versions of semantic roles. **PropBank** uses both proto-roles and verb-specific semantic roles. **FrameNet** uses semantic roles that are specific to a general semantic idea called a *frame*.

## 18.4 The Proposition Bank

**PropBank** The **Proposition Bank**, generally referred to as **PropBank**, is a resource of sentences annotated with semantic roles. The English PropBank labels all the sentences in the Penn TreeBank; the Chinese PropBank labels sentences in the Penn Chinese TreeBank. Because of the difficulty of defining a universal set of thematic roles, the semantic roles in PropBank are defined with respect to an individual verb sense. Each sense of each verb thus has a specific set of roles, which are given only numbers rather than names: **Arg0**, **Arg1**, **Arg2**, and so on. In general, **Arg0** represents the PROTO-AGENT, and **Arg1**, the PROTO-PATIENT. The semantics of the other roles are less consistent, often being defined specifically for each verb. Nonetheless there are some generalization; the **Arg2** is often the benefactive, instrument, attribute, or end state, the **Arg3** the start point, benefactive, instrument, or attribute, and the **Arg4** the end point.

Here are some slightly simplified PropBank entries for one sense each of the verbs *agree* and *fall*. Such PropBank entries are called **frame files**; note that the definitions in the frame file for each role (“Other entity agreeing”, “Extent, amount fallen”) are informal glosses intended to be read by humans, rather than being formal definitions.

(18.11) **agree.01**

Arg0: Agreer  
 Arg1: Proposition  
 Arg2: Other entity agreeing

Ex1: [<sub>Arg0</sub> The group] *agreed* [<sub>Arg1</sub> it wouldn't make an offer].

Ex2: [<sub>ArgM-TMP</sub> Usually] [<sub>Arg0</sub> John] *agrees* [<sub>Arg2</sub> with Mary]  
 [<sub>Arg1</sub> on everything].

(18.12) **fall.01**

Arg1: Logical subject, patient, thing falling

Arg2: Extent, amount fallen

Arg3: start point

Arg4: end point, end state of arg1

Ex1: [<sub>Arg1</sub> Sales] *fell* [<sub>Arg4</sub> to \$25 million] [<sub>Arg3</sub> from \$27 million].

Ex2: [<sub>Arg1</sub> The average junk bond] *fell* [<sub>Arg2</sub> by 4.2%].

Note that there is no Arg0 role for *fall*, because the normal subject of *fall* is a PROTO-PATIENT.

The PropBank semantic roles can be useful in recovering shallow semantic information about verbal arguments. Consider the verb *increase*:

(18.13) **increase.01** “go up incrementally”

Arg0: causer of increase

Arg1: thing increasing

Arg2: amount increased by, EXT, or MNR

Arg3: start point

Arg4: end point

A PropBank semantic role labeling would allow us to infer the commonality in the event structures of the following three examples, that is, that in each case *Big Fruit Co.* is the AGENT and *the price of bananas* is the THEME, despite the differing surface forms.

(18.14) [<sub>Arg0</sub> Big Fruit Co. ] increased [<sub>Arg1</sub> the price of bananas].

(18.15) [<sub>Arg1</sub> The price of bananas] was increased again [<sub>Arg0</sub> by Big Fruit Co. ]

(18.16) [<sub>Arg1</sub> The price of bananas] increased [<sub>Arg2</sub> 5%].

PropBank also has a number of non-numbered arguments called **ArgMs**, (ArgM-TMP, ArgM-LOC, etc) which represent modification or adjunct meanings. These are relatively stable across predicates, so aren't listed with each frame file. Data labeled with these modifiers can be helpful in training systems to detect temporal, location, or directional modification across predicates. Some of the ArgM's include:

<b>TMP</b>	when?	yesterday evening, now
<b>LOC</b>	where?	at the museum, in San Francisco
<b>DIR</b>	where to/from?	down, to Bangkok
<b>MNR</b>	how?	clearly, with much enthusiasm
<b>PRP/CAU</b>	why?	because ... , in response to the ruling
<b>REC</b>		themselves, each other
<b>ADV</b>	miscellaneous	
<b>PRD</b>	secondary predication	...ate the meat raw

**NomBank**

While PropBank focuses on verbs, a related project, **NomBank** (Meyers et al., 2004) adds annotations to noun predicates. For example the noun *agreement* in *Apple's agreement with IBM* would be labeled with Apple as the Arg0 and IBM as

the Arg2. This allows semantic role labelers to assign labels to arguments of both verbal and nominal predicates.

## 18.5 FrameNet

While making inferences about the semantic commonalities across different sentences with *increase* is useful, it would be even more useful if we could make such inferences in many more situations, across different verbs, and also between verbs and nouns. For example, we'd like to extract the similarity among these three sentences:

(18.17) [Arg1 The price of bananas] increased [Arg2 5%].

(18.18) [Arg1 The price of bananas] rose [Arg2 5%].

(18.19) There has been a [Arg2 5%] rise [Arg1 in the price of bananas].

Note that the second example uses the different verb *rise*, and the third example uses the noun rather than the verb *rise*. We'd like a system to recognize that *the price of bananas* is what went up, and that *5%* is the amount it went up, no matter whether the *5%* appears as the object of the verb *increased* or as a nominal modifier of the noun *rise*.

### FrameNet

The **FrameNet** project is another semantic-role-labeling project that attempts to address just these kinds of problems (Baker et al. 1998, Fillmore et al. 2003, Fillmore and Baker 2009, Ruppenhofer et al. 2016). Whereas roles in the PropBank project are specific to an individual verb, roles in the FrameNet project are specific to a **frame**.

What is a frame? Consider the following set of words:

*reservation, flight, travel, buy, price, cost, fare, rates, meal, plane*

There are many individual lexical relations of hyponymy, synonymy, and so on between many of the words in this list. The resulting set of relations does not, however, add up to a complete account of how these words are related. They are clearly all defined with respect to a coherent chunk of common-sense background information concerning air travel.

### frame

We call the holistic background knowledge that unites these words a **frame** (Fillmore, 1985). The idea that groups of words are defined with respect to some background information is widespread in artificial intelligence and cognitive science, where besides **frame** we see related works like a **model** (Johnson-Laird, 1983), or even **script** (Schank and Abelson, 1977).

### model

### script

### frame elements

A frame in FrameNet is a background knowledge structure that defines a set of frame-specific semantic roles, called **frame elements**, and includes a set of predicates that use these roles. Each word evokes a frame and profiles some aspect of the frame and its elements. The FrameNet dataset includes a set of frames and frame elements, the lexical units associated with each frame, and a set of labeled example sentences. For example, the **change\_position\_on\_a\_scale** frame is defined as follows:

This frame consists of words that indicate the change of an Item's position on a scale (the Attribute) from a starting point (Initial\_value) to an end point (Final\_value).

### core roles

Some of the semantic roles (frame elements) in the frame are defined as in Fig. 18.3. Note that these are separated into **core roles**, which are frame specific, and

**non-core roles** **non-core roles**, which are more like the Arg-M arguments in PropBank, expressed more general properties of time, location, and so on.

Core Roles	
ATTRIBUTE	The ATTRIBUTE is a scalar property that the ITEM possesses.
DIFFERENCE	The distance by which an ITEM changes its position on the scale.
FINAL_STATE	A description that presents the ITEM's state after the change in the ATTRIBUTE's value as an independent predication.
FINAL_VALUE	The position on the scale where the ITEM ends up.
INITIAL_STATE	A description that presents the ITEM's state before the change in the ATTRIBUTE's value as an independent predication.
INITIAL_VALUE	The initial position on the scale from which the ITEM moves away.
ITEM	The entity that has a position on the scale.
VALUE_RANGE	A portion of the scale, typically identified by its end points, along which the values of the ATTRIBUTE fluctuate.
Some Non-Core Roles	
DURATION	The length of time over which the change takes place.
SPEED	The rate of change of the VALUE.
GROUP	The GROUP in which an ITEM changes the value of an ATTRIBUTE in a specified way.

**Figure 18.3** The frame elements in the **change\_position\_on\_a\_scale** frame from the FrameNet Labelers Guide (Ruppenhofer et al., 2016).

Here are some example sentences:

- (18.20) [ITEM Oil] *rose* [ATTRIBUTE in price] [DIFFERENCE by 2%].  
 (18.21) [ITEM It] has *increased* [FINAL\_STATE to having them 1 day a month].  
 (18.22) [ITEM Microsoft shares] *fell* [FINAL\_VALUE to 7 5/8].  
 (18.23) [ITEM Colon cancer incidence] *fell* [DIFFERENCE by 50%] [GROUP among men].  
 (18.24) a steady *increase* [INITIAL\_VALUE from 9.5] [FINAL\_VALUE to 14.3] [ITEM in dividends]  
 (18.25) a [DIFFERENCE 5%] [ITEM dividend] *increase*...

Note from these example sentences that the frame includes target words like *rise*, *fall*, and *increase*. In fact, the complete frame consists of the following words:

<b>VERBS:</b>	dwindle	move	soar	escalation	shift
	advance	edge	mushroom	swell	explosion
	climb	explode	plummet	swing	fall
	decline	fall	reach	triple	fluctuation
	decrease	fluctuate	rise	tumble	gain
	diminish	gain	rocket		increasingly
	dip	grow	shift	<b>NOUNS:</b>	hike
	double	increase	skyrocket	decline	increase
	drop	jump	slide	decrease	rise

FrameNet also codes relationships between frames, allowing frames to inherit from each other, or representing relations between frames like causation (and generalizations among frame elements in different frames can be representing by inheritance as well). Thus, there is a **Cause\_change\_of\_position\_on\_a\_scale** frame that is linked to the **Change\_of\_position\_on\_a\_scale** frame by the **cause** relation, but that adds an AGENT role and is used for causative examples such as the following:



(18.26) [<sub>AGENT</sub> They] *raised* [<sub>ITEM</sub> the price of their soda] [<sub>DIFFERENCE</sub> by 2%].

Together, these two frames would allow an understanding system to extract the common event semantics of all the verbal and nominal causative and non-causative usages.

FrameNets have also been developed for many other languages including Spanish, German, Japanese, Portuguese, Italian, and Chinese.

## 18.6 Semantic Role Labeling

semantic role  
labeling

**Semantic role labeling** (sometimes shortened as **SRL**) is the task of automatically finding the **semantic roles** of each argument of each predicate in a sentence. Current approaches to semantic role labeling are based on supervised machine learning, often using the FrameNet and PropBank resources to specify what counts as a predicate, define the set of roles used in the task, and provide training and test sets.

Recall that the difference between these two models of semantic roles is that FrameNet (18.27) employs many frame-specific frame elements as roles, while PropBank (18.28) uses a smaller number of numbered argument labels that can be interpreted as verb-specific labels, along with the more general ARGM labels. Some examples:

(18.27) [You]            can't [blame] [the program] [for being unable to identify it]  
COGNIZER            TARGET    EVALUEE            REASON

(18.28) [The San Francisco Examiner] issued [a special edition] [yesterday]  
ARG0    TARGET    ARG1    ARGM-TMP

### 18.6.1 A Feature-based Algorithm for Semantic Role Labeling

A simplified feature-based semantic role labeling algorithm is sketched in Fig. 18.4. Feature-based algorithms—from the very earliest systems like (Simmons, 1973)—begin by parsing, using broad-coverage parsers to assign a parse to the input string. Figure 18.5 shows a parse of (18.28) above. The parse is then traversed to find all words that are predicates.

For each of these predicates, the algorithm examines each node in the parse tree and uses supervised classification to decide the semantic role (if any) it plays for this predicate. Given a labeled training set such as PropBank or FrameNet, a feature vector is extracted for each node, using feature templates described in the next subsection. A 1-of-N classifier is then trained to predict a semantic role for each constituent given these features, where N is the number of potential semantic roles plus an extra NONE role for non-role constituents. Any standard classification algorithms can be used. Finally, for each test sentence to be labeled, the classifier is run on each relevant constituent.

Instead of training a single-stage classifier as in Fig. 18.5, the node-level classification task can be broken down into multiple steps:

1. **Pruning:** Since only a small number of the constituents in a sentence are arguments of any given predicate, many systems use simple heuristics to prune unlikely constituents.
2. **Identification:** a binary classification of each node as an argument to be labeled or a NONE.


```

function SEMANTICROLELABEL(words) returns labeled tree

  parse ← PARSE(words)
  for each predicate in parse do
    for each node in parse do
      featurevector ← EXTRACTFEATURES(node, predicate, parse)
      CLASSIFYNODE(node, featurevector, parse)

```

**Figure 18.4** A generic semantic-role-labeling algorithm. CLASSIFYNODE is a 1-of- $N$  classifier that assigns a semantic role (or NONE for non-role constituents), trained on labeled data such as FrameNet or PropBank.

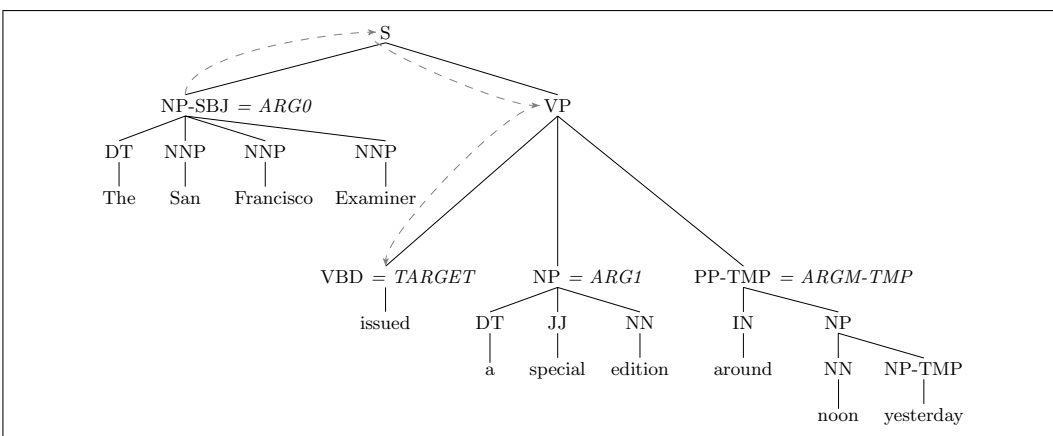

**Figure 18.5** Parse tree for a PropBank sentence, showing the PropBank argument labels. The dotted line shows the **path** feature  $NP \uparrow S \downarrow VP \downarrow VBD$  for ARG0, the NP-SBJ constituent *The San Francisco Examiner*.

3. **Classification:** a 1-of- $N$  classification of all the constituents that were labeled as arguments by the previous stage

The separation of identification and classification may lead to better use of features (different features may be useful for the two tasks) or to computational efficiency.

### Global Optimization

The classification algorithm of Fig. 18.5 classifies each argument separately (‘locally’), making the simplifying assumption that each argument of a predicate can be labeled independently. This assumption is false; there are interactions between arguments that require a more ‘global’ assignment of labels to constituents. For example, constituents in FrameNet and PropBank are required to be non-overlapping. More significantly, the semantic roles of constituents are not independent. For example PropBank does not allow multiple identical arguments; two constituents of the same verb cannot both be labeled ARG0.

Role labeling systems thus often add a fourth step to deal with global consistency across the labels in a sentence. For example, the local classifiers can return a list of possible labels associated with probabilities for each constituent, and a second-pass Viterbi decoding or re-ranking approach can be used to choose the best consensus label. Integer linear programming (ILP) is another common way to choose a solution that conforms best to multiple constraints.

### Features for Semantic Role Labeling

Most systems use some generalization of the core set of features introduced by Gildea and Jurafsky (2000). Common basic features templates (demonstrated on the *NP-SBJ* constituent *The San Francisco Examiner* in Fig. 18.5) include:

- The governing **predicate**, in this case the verb *issued*. The predicate is a crucial feature since labels are defined only with respect to a particular predicate.
- The **phrase type** of the constituent, in this case, *NP* (or *NP-SBJ*). Some semantic roles tend to appear as *NPs*, others as *S* or *PP*, and so on.
- The **headword** of the constituent, *Examiner*. The headword of a constituent can be computed with standard head rules, such as those given in Chapter 10 in Fig. ???. Certain headwords (e.g., pronouns) place strong constraints on the possible semantic roles they are likely to fill.
- The **headword part of speech** of the constituent, *NNP*.
- The **path** in the parse tree from the constituent to the predicate. This path is marked by the dotted line in Fig. 18.5. Following Gildea and Jurafsky (2000), we can use a simple linear representation of the path,  $NP\uparrow S\downarrow VP\downarrow VBD$ .  $\uparrow$  and  $\downarrow$  represent upward and downward movement in the tree, respectively. The path is very useful as a compact representation of many kinds of grammatical function relationships between the constituent and the predicate.
- The **voice** of the clause in which the constituent appears, in this case, **active** (as contrasted with **passive**). Passive sentences tend to have strongly different linkings of semantic roles to surface form than do active ones.
- The binary **linear position** of the constituent with respect to the predicate, either **before** or **after**.
- The **subcategorization** of the predicate, the set of expected arguments that appear in the verb phrase. We can extract this information by using the phrase-structure rule that expands the immediate parent of the predicate;  $VP \rightarrow VBD NP PP$  for the predicate in Fig. 18.5.
- The named entity type of the constituent.
- The first words and the last word of the constituent.

The following feature vector thus represents the first *NP* in our example (recall that most observations will have the value *NONE* rather than, for example, *ARG0*, since most constituents in the parse tree will not bear a semantic role):


```
ARG0: [issued, NP, Examiner, NNP, NP↑S↓VP↓VBD, active, before, VP → NP PP,
      ORG, The, Examiner]
```

Other features are often used in addition, such as sets of *n*-grams inside the constituent, or more complex versions of the path features (the upward or downward halves, or whether particular nodes occur in the path).

It's also possible to use dependency parses instead of constituency parses as the basis of features, for example using dependency parse paths instead of constituency paths.

### 18.6.2 A Neural Algorithm for Semantic Role Labeling

The standard neural algorithm for semantic role labeling is based on the bi-LSTM IOB tagger introduced in Chapter 9, which we've seen applied to part-of-speech tagging and named entity tagging, among other tasks. Recall that with IOB tagging,

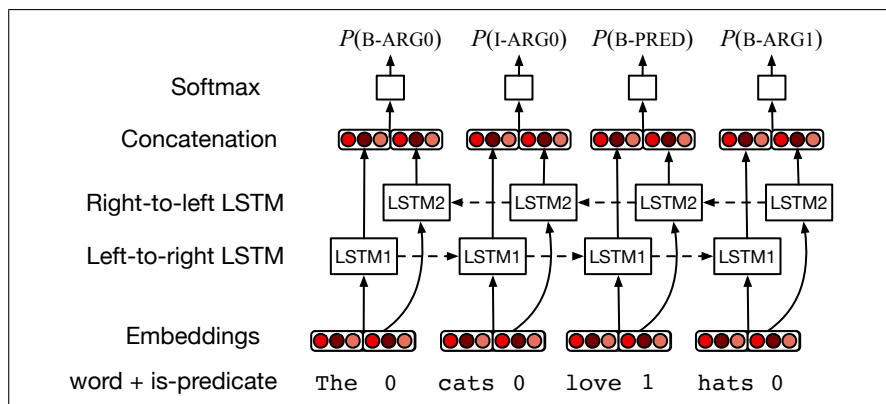

**Figure 18.6** A bi-LSTM approach to semantic role labeling. Most actual networks are much deeper than shown in this figure; 3 to 4 bi-LSTM layers (6 to 8 total LSTMs) are common. The input is a concatenation of an embedding for the input word and an embedding of a binary variable which is 1 for the predicate to 0 for all other words. After [He et al. \(2017\)](#).

we have a begin and end tag for each possible role (B-ARG0, I-ARG0; B-ARG1, I-ARG1, and so on), plus an outside tag O.

As with all the taggers, the goal is to compute the highest probability tag sequence  $\hat{y}$ , given the input sequence of words  $w$ :

$$\hat{y} = \operatorname{argmax}_{y \in T} P(y|w)$$

In algorithms like [He et al. \(2017\)](#), each input word is mapped to pre-trained embeddings, and also associated with an embedding for a flag (0/1) variable indicating whether that input word is the predicate. These concatenated embeddings are passed through multiple layers of bi-directional LSTM. State-of-the-art algorithms tend to be deeper than for POS or NER tagging, using 3 to 4 layers (6 to 8 total LSTMs). Highway layers can be used to connect these layers as well.

Output from the last bi-LSTM can then be turned into an IOB sequence as for POS or NER tagging. Tags can be locally optimized by taking the bi-LSTM output, passing it through a single layer into a softmax for each word that creates a probability distribution over all SRL tags and the most likely tag for word  $x_i$  is chosen as  $t_i$ , computing for each word essentially:

$$\hat{y}_i = \operatorname{argmax}_{t \in \text{tags}} P(t|w_i)$$

However, just as feature-based SRL tagging, this local approach to decoding doesn't exploit the global constraints between tags; a tag I-ARG0, for example, must follow another I-ARG0 or B-ARG0.

As we saw for POS and NER tagging, there are many ways to take advantage of these global constraints. A CRF layer can be used instead of a softmax layer on top of the bi-LSTM output, and the Viterbi decoding algorithm can be used to decode from the CRF.

An even simpler Viterbi decoding algorithm that may perform equally well and doesn't require adding CRF complexity to the training process is to start with the simple softmax. The softmax output (the entire probability distribution over tags) for each word is then treated it as a lattice and we can do Viterbi decoding through the lattice. The hard IOB constraints can act as the transition probabilities in the

Viterbi decoding (Thus the transition from state I-ARG0 to I-ARG1 would have probability 0). Alternatively, the training data can be used to learn bigram or trigram tag transition probabilities as if doing HMM decoding. Fig. 18.6 shows a sketch of the algorithm.

### 18.6.3 Evaluation of Semantic Role Labeling

The standard evaluation for semantic role labeling is to require that each argument label must be assigned to the exactly correct word sequence or parse constituent, and then compute precision, recall, and *F*-measure. Identification and classification can also be evaluated separately. Two common datasets used for evaluation are CoNLL-2005 (Carreras and Màrquez, 2005) and CoNLL-2012 (Pradhan et al., 2013).

## 18.7 Selectional Restrictions

selectional  
restriction

We turn in this section to another way to represent facts about the relationship between predicates and arguments. A **selectional restriction** is a semantic type constraint that a verb imposes on the kind of concepts that are allowed to fill its argument roles. Consider the two meanings associated with the following example:

(18.29) I want to eat someplace nearby.

There are two possible parses and semantic interpretations for this sentence. In the sensible interpretation, *eat* is intransitive and the phrase *someplace nearby* is an adjunct that gives the location of the eating event. In the nonsensical *speaker-as-Godzilla* interpretation, *eat* is transitive and the phrase *someplace nearby* is the direct object and the THEME of the eating, like the NP *Malaysian food* in the following sentences:

(18.30) I want to eat Malaysian food.

How do we know that *someplace nearby* isn't the direct object in this sentence? One useful cue is the semantic fact that the THEME of EATING events tends to be something that is *edible*. This restriction placed by the verb *eat* on the filler of its THEME argument is a selectional restriction.

Selectional restrictions are associated with senses, not entire lexemes. We can see this in the following examples of the lexeme *serve*:

(18.31) The restaurant serves green-lipped mussels.

(18.32) Which airlines serve Denver?

Example (18.31) illustrates the offering-food sense of *serve*, which ordinarily restricts its THEME to be some kind of food. Example (18.32) illustrates the *provides a commercial service to* sense of *serve*, which constrains its THEME to be some type of appropriate location.

Selectional restrictions vary widely in their specificity. The verb *imagine*, for example, imposes strict requirements on its AGENT role (restricting it to humans and other animate entities) but places very few semantic requirements on its THEME role. A verb like *diagonalize*, on the other hand, places a very specific constraint on the filler of its THEME role: it has to be a matrix, while the arguments of the adjectives *odorless* are restricted to concepts that could possess an odor:

(18.33) In rehearsal, I often ask the musicians to *imagine* a tennis game.

(18.34) Radon is an *odorless* gas that can't be detected by human senses.

(18.35) To *diagonalize* a matrix is to find its eigenvalues.

These examples illustrate that the set of concepts we need to represent selectional restrictions (being a matrix, being able to possess an odor, etc) is quite open ended. This distinguishes selectional restrictions from other features for representing lexical knowledge, like parts-of-speech, which are quite limited in number.

### 18.7.1 Representing Selectional Restrictions

One way to capture the semantics of selectional restrictions is to use and extend the event representation of Chapter 14. Recall that the neo-Davidsonian representation of an event consists of a single variable that stands for the event, a predicate denoting the kind of event, and variables and relations for the event roles. Ignoring the issue of the  $\lambda$ -structures and using thematic roles rather than deep event roles, the semantic contribution of a verb like *eat* might look like the following:

$$\exists e, x, y \text{ Eating}(e) \wedge \text{Agent}(e, x) \wedge \text{Theme}(e, y)$$

With this representation, all we know about  $y$ , the filler of the THEME role, is that it is associated with an *Eating* event through the *Theme* relation. To stipulate the selectional restriction that  $y$  must be something edible, we simply add a new term to that effect:

$$\exists e, x, y \text{ Eating}(e) \wedge \text{Agent}(e, x) \wedge \text{Theme}(e, y) \wedge \text{EdibleThing}(y)$$

When a phrase like *ate a hamburger* is encountered, a semantic analyzer can form the following kind of representation:

$$\exists e, x, y \text{ Eating}(e) \wedge \text{Eater}(e, x) \wedge \text{Theme}(e, y) \wedge \text{EdibleThing}(y) \wedge \text{Hamburger}(y)$$

This representation is perfectly reasonable since the membership of  $y$  in the category *Hamburger* is consistent with its membership in the category *EdibleThing*, assuming a reasonable set of facts in the knowledge base. Correspondingly, the representation for a phrase such as *ate a takeoff* would be ill-formed because membership in an event-like category such as *Takeoff* would be inconsistent with membership in the category *EdibleThing*.

While this approach adequately captures the semantics of selectional restrictions, there are two problems with its direct use. First, using FOL to perform the simple task of enforcing selectional restrictions is overkill. Other, far simpler, formalisms can do the job with far less computational cost. The second problem is that this approach presupposes a large, logical knowledge base of facts about the concepts that make up selectional restrictions. Unfortunately, although such common-sense knowledge bases are being developed, none currently have the kind of coverage necessary to the task.

A more practical approach is to state selectional restrictions in terms of WordNet synsets rather than as logical concepts. Each predicate simply specifies a WordNet synset as the selectional restriction on each of its arguments. A meaning representation is well-formed if the role filler word is a hyponym (subordinate) of this synset.

For our *ate a hamburger* example, for instance, we could set the selectional restriction on the THEME role of the verb *eat* to the synset **{food, nutrient}**, glossed as *any substance that can be metabolized by an animal to give energy and build*

```

Sense 1
hamburger, beefburger --
(a fried cake of minced beef served on a bun)
=> sandwich
    => snack food
        => dish
            => nutriment, nourishment, nutrition...
                => food, nutrient
                    => substance
                        => matter
                            => physical entity
                                => entity

```

**Figure 18.7** Evidence from WordNet that hamburgers are edible.

*tissue*. Luckily, the chain of hypernyms for *hamburger* shown in Fig. 18.7 reveals that hamburgers are indeed food. Again, the filler of a role need not match the restriction synset exactly; it just needs to have the synset as one of its superordinates.

We can apply this approach to the THEME roles of the verbs *imagine*, *lift*, and *diagonalize*, discussed earlier. Let us restrict *imagine*'s THEME to the synset {entity}, *lift*'s THEME to {physical entity}, and *diagonalize* to {matrix}. This arrangement correctly permits *imagine a hamburger* and *lift a hamburger*, while also correctly ruling out *diagonalize a hamburger*.

## 18.7.2 Selectional Preferences

In the earliest implementations, selectional restrictions were considered strict constraints on the kind of arguments a predicate could take (Katz and Fodor 1963, Hirst 1987). For example, the verb *eat* might require that its THEME argument be [+FOOD]. Early word sense disambiguation systems used this idea to rule out senses that violated the selectional restrictions of their governing predicates.

Very quickly, however, it became clear that these selectional restrictions were better represented as preferences rather than strict constraints (Wilks 1975b, Wilks 1975a). For example, selectional restriction violations (like inedible arguments of *eat*) often occur in well-formed sentences, for example because they are negated (18.36), or because selectional restrictions are overstated (18.37):

(18.36) But it fell apart in 1931, perhaps because people realized you can't **eat** gold for lunch if you're hungry.

(18.37) In his two championship trials, Mr. Kulkarni **ate** glass on an empty stomach, accompanied only by water and tea.

Modern systems for selectional preferences therefore specify the relation between a predicate and its possible arguments with soft constraints of some kind.

### Selectional Association

One of the most influential has been the **selectional association** model of Resnik (1993). Resnik defines the idea of **selectional preference strength** as the general amount of information that a predicate tells us about the semantic class of its arguments. For example, the verb *eat* tells us a lot about the semantic class of its direct objects, since they tend to be edible. The verb *be*, by contrast, tells us less about its direct objects. The selectional preference strength can be defined by the difference in information between two distributions: the distribution of expected semantic

selectional  
preference  
strength

relative entropy  
KL divergence

classes  $P(c)$  (how likely is it that a direct object will fall into class  $c$ ) and the distribution of expected semantic classes for the particular verb  $P(c|v)$  (how likely is it that the direct object of the specific verb  $v$  will fall into semantic class  $c$ ). The greater the difference between these distributions, the more information the verb is giving us about possible objects. The difference between these two distributions can be quantified by **relative entropy**, or the Kullback-Leibler divergence (Kullback and Leibler, 1951). The Kullback-Leibler or **KL divergence**  $D(P||Q)$  expresses the difference between two probability distributions  $P$  and  $Q$  (we'll return to this when we discuss distributional models of meaning in Chapter 6).

$$D(P||Q) = \sum_x P(x) \log \frac{P(x)}{Q(x)} \quad (18.38)$$

The selectional preference  $S_R(v)$  uses the KL divergence to express how much information, in bits, the verb  $v$  expresses about the possible semantic class of its argument.

$$\begin{aligned} S_R(v) &= D(P(c|v)||P(c)) \\ &= \sum_c P(c|v) \log \frac{P(c|v)}{P(c)} \end{aligned} \quad (18.39)$$

selectional  
association

Resnik then defines the **selectional association** of a particular class and verb as the relative contribution of that class to the general selectional preference of the verb:

$$A_R(v, c) = \frac{1}{S_R(v)} P(c|v) \log \frac{P(c|v)}{P(c)} \quad (18.40)$$

The selectional association is thus a probabilistic measure of the strength of association between a predicate and a class dominating the argument to the predicate. Resnik estimates the probabilities for these associations by parsing a corpus, counting all the times each predicate occurs with each argument word, and assuming that each word is a partial observation of all the WordNet concepts containing the word. The following table from Resnik (1996) shows some sample high and low selectional associations for verbs and some WordNet semantic classes of their direct objects.

Verb	Direct Object		Direct Object	
	Semantic Class	Assoc	Semantic Class	Assoc
read	WRITING	6.80	ACTIVITY	-.20
write	WRITING	7.26	COMMERCE	0
see	ENTITY	5.79	METHOD	-0.01

### Selectional Preference via Conditional Probability

An alternative to using selectional association between a verb and the WordNet class of its arguments, is to simply use the conditional probability of an argument word given a predicate verb. This simple model of selectional preferences can be used to directly model the strength of association of one verb (predicate) with one noun (argument).

The conditional probability model can be computed by parsing a very large corpus (billions of words), and computing co-occurrence counts: how often a given verb occurs with a given noun in a given relation. The conditional probability of an



argument noun given a verb for a particular relation  $P(n|v, r)$  can then be used as a selectional preference metric for that pair of words (Brockmann and Lapata, 2003):

$$P(n|v, r) = \begin{cases} \frac{C(n, v, r)}{C(v, r)} & \text{if } C(n, v, r) > 0 \\ 0 & \text{otherwise} \end{cases}$$

The inverse probability  $P(v|n, r)$  was found to have better performance in some cases (Brockmann and Lapata, 2003):

$$P(v|n, r) = \begin{cases} \frac{C(n, v, r)}{C(n, r)} & \text{if } C(n, v, r) > 0 \\ 0 & \text{otherwise} \end{cases}$$

In cases where it's not possible to get large amounts of parsed data, another option, at least for direct objects, is to get the counts from simple part-of-speech based approximations. For example pairs can be extracted using the pattern "V Det N", where V is any form of the verb, Det is *the—a—ε* and N is the singular or plural form of the noun (Keller and Lapata, 2003).

An even simpler approach is to use the simple log co-occurrence frequency of the predicate with the argument  $\log \text{count}(v, n, r)$  instead of conditional probability; this seems to do better for extracting preferences for syntactic subjects rather than objects (Brockmann and Lapata, 2003).

### Evaluating Selectional Preferences

#### pseudowords

One way to evaluate models of selectional preferences is to use **pseudowords** (Gale et al. 1992, Schütze 1992). A pseudoword is an artificial word created by concatenating a test word in some context (say *banana*) with a confounder word (say *door*) to create *banana-door*. The task of the system is to identify which of the two words is the original word. To evaluate a selectional preference model (for example on the relationship between a verb and a direct object) we take a test corpus and select all verb tokens. For each verb token (say *drive*) we select the direct object (e.g., *car*), concatenated with a confounder word that is its *nearest neighbor*, the noun with the frequency closest to the original (say *house*), to make *car/house*. We then use the selectional preference model to choose which of *car* and *house* are more preferred objects of *drive*, and compute how often the model chooses the correct original object (e.g., (*car*)) (Chambers and Jurafsky, 2010).

Another evaluation metric is to get human preferences for a test set of verb-argument pairs, and have them rate their degree of plausibility. This is usually done by using magnitude estimation, a technique from psychophysics, in which subjects rate the plausibility of an argument proportional to a modulus item. A selectional preference model can then be evaluated by its correlation with the human preferences (Keller and Lapata, 2003).

## 18.8 Primitive Decomposition of Predicates

One way of thinking about the semantic roles we have discussed through the chapter is that they help us define the roles that arguments play in a decompositional way, based on finite lists of thematic roles (agent, patient, instrument, proto-agent, proto-patient, etc.) This idea of decomposing meaning into sets of primitive semantics elements or features, called **primitive decomposition** or **componential analysis**,

has been taken even further, and focused particularly on predicates.

Consider these examples of the verb *kill*:

(18.41) Jim killed his philodendron.

(18.42) Jim did something to cause his philodendron to become not alive.

There is a truth-conditional ('propositional semantics') perspective from which these two sentences have the same meaning. Assuming this equivalence, we could represent the meaning of *kill* as:

(18.43)  $KILL(x,y) \Leftrightarrow CAUSE(x, BECOME(NOT(ALIVE(y))))$

thus using semantic primitives like *do*, *cause*, *become not*, and *alive*.

Indeed, one such set of potential semantic primitives has been used to account for some of the verbal alternations discussed in Section 18.2 (Lakoff 1965, Dowty 1979). Consider the following examples.

(18.44) John opened the door.  $\Rightarrow CAUSE(\text{John}, BECOME(OPEN(\text{door})))$

(18.45) The door opened.  $\Rightarrow BECOME(OPEN(\text{door}))$

(18.46) The door is open.  $\Rightarrow OPEN(\text{door})$

The decompositional approach asserts that a single state-like predicate associated with *open* underlies all of these examples. The differences among the meanings of these examples arises from the combination of this single predicate with the primitives CAUSE and BECOME.

While this approach to primitive decomposition can explain the similarity between states and actions or causative and non-causative predicates, it still relies on having a large number of predicates like *open*. More radical approaches choose to break down these predicates as well. One such approach to verbal predicate decomposition that played a role in early natural language understanding systems is **conceptual dependency** (CD), a set of ten primitive predicates, shown in Fig. 18.8.

conceptual  
dependency

Primitive	Definition
ATRANS	The abstract transfer of possession or control from one entity to another
PTRANS	The physical transfer of an object from one location to another
MTRANS	The transfer of mental concepts between entities or within an entity
MBUILD	The creation of new information within an entity
PROPEL	The application of physical force to move an object
MOVE	The integral movement of a body part by an animal
INGEST	The taking in of a substance by an animal
EXPEL	The expulsion of something from an animal
SPEAK	The action of producing a sound
ATTEND	The action of focusing a sense organ

**Figure 18.8** A set of conceptual dependency primitives.

Below is an example sentence along with its CD representation. The verb *brought* is translated into the two primitives ATRANS and PTRANS to indicate that the waiter both physically conveyed the check to Mary and passed control of it to her. Note that CD also associates a fixed set of thematic roles with each primitive to represent the various participants in the action.

(18.47) The waiter brought Mary the check.

$$\begin{aligned} \exists x, y \text{ } & Atrans(x) \wedge Actor(x, Waiter) \wedge Object(x, Check) \wedge To(x, Mary) \\ & \wedge Ptrans(y) \wedge Actor(y, Waiter) \wedge Object(y, Check) \wedge To(y, Mary) \end{aligned}$$

## 18.9 Summary

- **Semantic roles** are abstract models of the role an argument plays in the event described by the predicate.
- **Thematic roles** are a model of semantic roles based on a single finite list of roles. Other semantic role models include per-verb semantic role lists and **proto-agent/proto-patient**, both of which are implemented in **PropBank**, and per-frame role lists, implemented in **FrameNet**.
- **Semantic role labeling** is the task of assigning semantic role labels to the constituents of a sentence. The task is generally treated as a supervised machine learning task, with models trained on PropBank or FrameNet. Algorithms generally start by parsing a sentence and then automatically tag each parse tree node with a semantic role.
- Semantic **selectional restrictions** allow words (particularly predicates) to post constraints on the semantic properties of their argument words. **Selectional preference** models (like **selectional association** or simple conditional probability) allow a weight or probability to be assigned to the association between a predicate and an argument word or class.

## Bibliographical and Historical Notes

Although the idea of semantic roles dates back to Pāṇini, they were re-introduced into modern linguistics by Gruber (1965), Fillmore (1966) and Fillmore (1968)). Fillmore, interestingly, had become interested in argument structure by studying Lucien Tesnière’s groundbreaking *Éléments de Syntaxe Structurale* (Tesnière, 1959) in which the term ‘dependency’ was introduced and the foundations were laid for dependency grammar. Following Tesnière’s terminology, Fillmore first referred to argument roles as *actants* (Fillmore, 1966) but quickly switched to the term *case*, (see Fillmore (2003)) and proposed a universal list of semantic roles or cases (Agent, Patient, Instrument, etc.), that could be taken on by the arguments of predicates. Verbs would be listed in the lexicon with their **case frame**, the list of obligatory (or optional) case arguments.

The idea that semantic roles could provide an intermediate level of semantic representation that could help map from syntactic parse structures to deeper, more fully-specified representations of meaning was quickly adopted in natural language processing, and systems for extracting case frames were created for machine translation (Wilks, 1973), question-answering (Hendrix et al., 1973), spoken-language understanding (Nash-Webber, 1975), and dialogue systems (Bobrow et al., 1977). General-purpose semantic role labelers were developed. The earliest ones (Simmons, 1973) first parsed a sentence by means of an ATN (Augmented Transition

Network) parser. Each verb then had a set of rules specifying how the parse should be mapped to semantic roles. These rules mainly made reference to grammatical functions (subject, object, complement of specific prepositions) but also checked constituent internal features such as the animacy of head nouns. Later systems assigned roles from pre-built parse trees, again by using dictionaries with verb-specific case frames (Levin 1977, Marcus 1980).

By 1977 case representation was widely used and taught in AI and NLP courses, and was described as a standard of natural language understanding in the first edition of Winston’s (1977) textbook *Artificial Intelligence*.

In the 1980s Fillmore proposed his model of *frame semantics*, later describing the intuition as follows:

“The idea behind frame semantics is that speakers are aware of possibly quite complex situation types, packages of connected expectations, that go by various names—frames, schemas, scenarios, scripts, cultural narratives, memes—and the words in our language are understood with such frames as their presupposed background.” (Fillmore, 2012, p. 712)

The word *frame* seemed to be in the air for a suite of related notions proposed at about the same time by Minsky (1974), Hymes (1974), and Goffman (1974), as well as related notions with other names like *scripts* (Schank and Abelson, 1975) and *schemata* (Bobrow and Norman, 1975) (see Tannen (1979) for a comparison). Fillmore was also influenced by the semantic field theorists and by a visit to the Yale AI lab where he took notice of the lists of slots and fillers used by early information extraction systems like DeJong (1982) and Schank and Abelson (1977). In the 1990s Fillmore drew on these insights to begin the FrameNet corpus annotation project.

At the same time, Beth Levin drew on her early case frame dictionaries (Levin, 1977) to develop her book which summarized sets of verb classes defined by shared argument realizations (Levin, 1993). The VerbNet project built on this work (Kipper et al., 2000), leading soon afterwards to the PropBank semantic-role-labeled corpus created by Martha Palmer and colleagues (Palmer et al., 2005).

The combination of rich linguistic annotation and corpus-based approach instantiated in FrameNet and PropBank led to a revival of automatic approaches to semantic role labeling, first on FrameNet (Gildea and Jurafsky, 2000) and then on PropBank data (Gildea and Palmer, 2002, *inter alia*). The problem first addressed in the 1970s by hand-written rules was thus now generally recast as one of supervised machine learning enabled by large and consistent databases. Many popular features used for role labeling are defined in Gildea and Jurafsky (2002), Surdeanu et al. (2003), Xue and Palmer (2004), Pradhan et al. (2005), Che et al. (2009), and Zhao et al. (2009). The use of dependency rather than constituency parses was introduced in the CoNLL-2008 shared task (Surdeanu et al., 2008). For surveys see Palmer et al. (2010) and Márquez et al. (2008).

The use of neural approaches to semantic role labeling was pioneered by Collobert et al. (2011), who applied a CRF on top of a convolutional net. Early work like Folland, Jr. and Martin (2015) focused on using dependency features. Later work eschewed syntactic features altogether; (Zhou and Xu, 2015) introduced the use of a stacked (6-8 layer) bi-LSTM architecture, and (He et al., 2017) showed how to augment the bi-LSTM architecture with highway networks and also replace the CRF with A\* decoding that make it possible to apply a wide variety of global constraints in SRL decoding.

Most semantic role labeling schemes only work within a single sentence, focusing on the object of the verbal (or nominal, in the case of NomBank) predicate.

However, in many cases, a verbal or nominal predicate may have an **implicit argument**: one that appears only in a contextual sentence, or perhaps not at all and must be inferred. In the two sentences *This house has a new owner. The sale was finalized 10 days ago.* the *sale* in the second sentence has no ARG1, but a reasonable reader would infer that the Arg1 should be the *house* mentioned in the prior sentence. Finding these arguments, **implicit argument detection** (sometimes shortened as **iSRL**) was introduced by [Gerber and Chai \(2010\)](#) and [Ruppenhofer et al. \(2010\)](#). See [Do et al. \(2017\)](#) for more recent neural models.

To avoid the need for huge labeled training sets, unsupervised approaches for semantic role labeling attempt to induce the set of semantic roles by clustering over arguments. The task was pioneered by [Riloff and Schmelzenbach \(1998\)](#) and [Swier and Stevenson \(2004\)](#); see [Grenager and Manning \(2006\)](#), [Titov and Klementiev \(2012\)](#), [Lang and Lapata \(2014\)](#), [Woodsend and Lapata \(2015\)](#), and [Titov and Khodam \(2014\)](#).

Selectional preference has been widely studied beyond the selectional association models of [Resnik \(1993\)](#) and [Resnik \(1996\)](#). Methods have included clustering ([Rooth et al., 1999](#)), discriminative learning ([Bergsma et al., 2008](#)), and topic models ([Séaghdha 2010](#), [Ritter et al. 2010](#)), and constraints can be expressed at the level of words or classes ([Agirre and Martinez, 2001](#)). Selectional preferences have also been successfully integrated into semantic role labeling ([Erk 2007](#), [Zapirain et al. 2013](#), [Do et al. 2017](#)).

## Exercises

- Agirre, E. and Martinez, D. (2001). Learning class-to-class selectional preferences. In *CoNLL-01*.
- Baker, C. F., Fillmore, C. J., and Lowe, J. B. (1998). The Berkeley FrameNet project. In *COLING/ACL-98*, Montreal, Canada, pp. 86–90.
- Bergsma, S., Lin, D., and Goebel, R. (2008). Discriminative learning of selectional preference from unlabeled text. In *EMNLP-08*, pp. 59–68.
- Bloomfield, L. (1933). *Language*. University of Chicago Press.
- Bobrow, D. G., Kaplan, R. M., Kay, M., Norman, D. A., Thompson, H., and Winograd, T. (1977). GUS, A frame driven dialog system. *Artificial Intelligence*, 8, 155–173.
- Bobrow, D. G. and Norman, D. A. (1975). Some principles of memory schemata. In Bobrow, D. G. and Collins, A. (Eds.), *Representation and Understanding*. Academic Press.
- Brockmann, C. and Lapata, M. (2003). Evaluating and combining approaches to selectional preference acquisition. In *EACL-03*, pp. 27–34.
- Carreras, X. and Màrquez, L. (2005). Introduction to the CoNLL-2005 shared task: Semantic role labeling. In *CoNLL-05*, pp. 152–164.
- Chambers, N. and Jurafsky, D. (2010). Improving the use of pseudo-words for evaluating selectional preferences. In *ACL 2010*, pp. 445–453.
- Che, W., Li, Z., Li, Y., Guo, Y., Qin, B., and Liu, T. (2009). Multilingual dependency-based syntactic and semantic parsing. In *CoNLL-09*, pp. 49–54.
- Collobert, R., Weston, J., Bottou, L., Karlen, M., Kavukcuoglu, K., and Kuksa, P. (2011). Natural language processing (almost) from scratch. *The Journal of Machine Learning Research*, 12, 2493–2537.
- DeJong, G. F. (1982). An overview of the FRUMP system. In Lehnert, W. G. and Ringle, M. H. (Eds.), *Strategies for Natural Language Processing*, pp. 149–176. Lawrence Erlbaum.
- Do, Q. N. T., Bethard, S., and Moens, M.-F. (2017). Improving implicit semantic role labeling by predicting semantic frame arguments. In *IJCNLP-17*.
- Dowty, D. R. (1979). *Word Meaning and Montague Grammar*. D. Reidel.
- Erk, K. (2007). A simple, similarity-based model for selectional preferences. In *ACL-07*, pp. 216–223.
- Fillmore, C. J. (1966). A proposal concerning english prepositions. In Dinneen, F. P. (Ed.), *17th annual Round Table*, Vol. 17 of *Monograph Series on Language and Linguistics*, pp. 19–34. Georgetown University Press, Washington D.C.
- Fillmore, C. J. (1968). The case for case. In Bach, E. W. and Harms, R. T. (Eds.), *Universals in Linguistic Theory*, pp. 1–88. Holt, Rinehart & Winston.
- Fillmore, C. J. (1985). Frames and the semantics of understanding. *Quaderni di Semantica*, VI(2), 222–254.
- Fillmore, C. J. (2003). Valency and semantic roles: the concept of deep structure case. In Ágel, V., Eichinger, L. M., Eroms, H. W., Hellwig, P., Heringer, H. J., and Lobin, H. (Eds.), *Dependenz und Valenz: Ein internationales Handbuch der zeitgenössischen Forschung*, chap. 36, pp. 457–475. Walter de Gruyter.
- Fillmore, C. J. (2012). Encounters with language. *Computational Linguistics*, 38(4), 701–718.
- Fillmore, C. J. and Baker, C. F. (2009). A frames approach to semantic analysis. In Heine, B. and Narrog, H. (Eds.), *The Oxford Handbook of Linguistic Analysis*, pp. 313–340. Oxford University Press.
- Fillmore, C. J., Johnson, C. R., and Petruck, M. R. L. (2003). Background to FrameNet. *International journal of lexicography*, 16(3), 235–250.
- Folland, Jr., W. R. and Martin, J. H. (2015). Dependency-based semantic role labeling using convolutional neural networks. In *\*SEM 2015*, pp. 279–289.
- Gale, W. A., Church, K. W., and Yarowsky, D. (1992). Work on statistical methods for word sense disambiguation. In Goldman, R. (Ed.), *Proceedings of the 1992 AAAI Fall Symposium on Probabilistic Approaches to Natural Language*.
- Gerber, M. and Chai, J. Y. (2010). Beyond nombank: A study of implicit arguments for nominal predicates. In *ACL 2010*, pp. 1583–1592.
- Gildea, D. and Jurafsky, D. (2000). Automatic labeling of semantic roles. In *ACL-00*, Hong Kong, pp. 512–520.
- Gildea, D. and Jurafsky, D. (2002). Automatic labeling of semantic roles. *Computational Linguistics*, 28(3), 245–288.
- Gildea, D. and Palmer, M. (2002). The necessity of syntactic parsing for predicate argument recognition. In *ACL-02*, Philadelphia, PA.
- Goffman, E. (1974). *Frame analysis: An essay on the organization of experience*. Harvard University Press.
- Grenager, T. and Manning, C. D. (2006). Unsupervised Discovery of a Statistical Verb Lexicon. In *EMNLP 2006*.
- Gruber, J. S. (1965). *Studies in Lexical Relations*. Ph.D. thesis, MIT.
- He, L., Lee, K., Lewis, M., and Zettlemoyer, L. (2017). Deep semantic role labeling: What works and what’s next. In *ACL 2017*, pp. 473–483.
- Hendrix, G. G., Thompson, C. W., and Slocum, J. (1973). Language processing via canonical verbs and semantic models. In *Proceedings of IJCAI-73*.
- Hirst, G. (1987). *Semantic Interpretation and the Resolution of Ambiguity*. Cambridge University Press.
- Hymes, D. (1974). Ways of speaking. In Bauman, R. and Sherzer, J. (Eds.), *Explorations in the ethnography of speaking*, pp. 433–451. Cambridge University Press.
- Johnson-Laird, P. N. (1983). *Mental Models*. Harvard University Press, Cambridge, MA.
- Katz, J. J. and Fodor, J. A. (1963). The structure of a semantic theory. *Language*, 39, 170–210.
- Keller, F. and Lapata, M. (2003). Using the web to obtain frequencies for unseen bigrams. *Computational Linguistics*, 29, 459–484.
- Kipper, K., Dang, H. T., and Palmer, M. (2000). Class-based construction of a verb lexicon. In *AAAI-00*, Austin, TX, pp. 691–696.
- Kullback, S. and Leibler, R. A. (1951). On information and sufficiency. *Annals of Mathematical Statistics*, 22, 79–86.
- Lakoff, G. (1965). *On the Nature of Syntactic Irregularity*. Ph.D. thesis, Indiana University. Published as *Irregularity in Syntax*. Holt, Rinehart, and Winston, New York, 1970.

- Lang, J. and Lapata, M. (2014). Similarity-driven semantic role induction via graph partitioning. *Computational Linguistics*, 40(3), 633–669.
- Levin, B. (1977). Mapping sentences to case frames. Tech. rep. 167, MIT AI Laboratory. AI Working Paper 143.
- Levin, B. (1993). *English Verb Classes and Alternations: A Preliminary Investigation*. University of Chicago Press.
- Levin, B. and Rappaport Hovav, M. (2005). *Argument Realization*. Cambridge University Press.
- Marcus, M. P. (1980). *A Theory of Syntactic Recognition for Natural Language*. MIT Press.
- Márquez, L., Carreras, X., Litkowski, K. C., and Stevenson, S. (2008). Semantic role labeling: An introduction to the special issue. *Computational linguistics*, 34(2), 145–159.
- Meyers, A., Reeves, R., Macleod, C., Szekely, R., Zielinska, V., Young, B., and Grishman, R. (2004). The nombank project: An interim report. In *Proceedings of the NAACL/HLT Workshop: Frontiers in Corpus Annotation*.
- Minsky, M. (1974). A framework for representing knowledge. Tech. rep. 306, MIT AI Laboratory. Memo 306.
- Nash-Webber, B. L. (1975). The role of semantics in automatic speech understanding. In Bobrow, D. G. and Collins, A. (Eds.), *Representation and Understanding*, pp. 351–382. Academic Press.
- Palmer, M., Gildea, D., and Xue, N. (2010). Semantic role labeling. *Synthesis Lectures on Human Language Technologies*, 3(1), 1–103.
- Palmer, M., Kingsbury, P., and Gildea, D. (2005). The proposition bank: An annotated corpus of semantic roles. *Computational Linguistics*, 31(1), 71–106.
- Penn, G. and Kiparsky, P. (2012). On Pāṇini and the generative capacity of contextualized replacement systems. In *COLING-12*, pp. 943–950.
- Pradhan, S., Moschitti, A., Xue, N., Ng, H. T., Björkelund, A., Uryupina, O., Zhang, Y., and Zhong, Z. (2013). Towards robust linguistic analysis using OntoNotes. In *CoNLL-13*, pp. 143–152.
- Pradhan, S., Ward, W., Hacioglu, K., Martin, J. H., and Jurafsky, D. (2005). Semantic role labeling using different syntactic views. In *ACL-05*, Ann Arbor, MI.
- Resnik, P. (1993). Semantic classes and syntactic ambiguity. In *Proceedings of the workshop on Human Language Technology*, pp. 278–283.
- Resnik, P. (1996). Selectional constraints: An information-theoretic model and its computational realization. *Cognition*, 61, 127–159.
- Riloff, E. and Schmelzenbach, M. (1998). An empirical approach to conceptual case frame acquisition. In *Proceedings of the Sixth Workshop on Very Large Corpora*, Montreal, Canada, pp. 49–56.
- Ritter, A., Etzioni, O., and Mausam (2010). A latent dirichlet allocation method for selectional preferences. In *ACL 2010*, pp. 424–434.
- Rooth, M., Riezler, S., Prescher, D., Carroll, G., and Beil, F. (1999). Inducing a semantically annotated lexicon via EM-based clustering. In *ACL-99*, College Park, MA, pp. 104–111.
- Ruppenhofer, J., Ellsworth, M., Petruck, M. R. L., Johnson, C. R., Baker, C. F., and Scheffczyk, J. (2016). *FrameNet II: Extended theory and practice*.
- Ruppenhofer, J., Sporleder, C., Morante, R., Baker, C., and Palmer, M. (2010). Semeval-2010 task 10: Linking events and their participants in discourse. In *Proceedings of the 5th International Workshop on Semantic Evaluation*, pp. 45–50.
- Schank, R. C. and Abelson, R. P. (1975). Scripts, plans, and knowledge. In *Proceedings of IJCAI-75*, pp. 151–157.
- Schank, R. C. and Abelson, R. P. (1977). *Scripts, Plans, Goals and Understanding*. Lawrence Erlbaum.
- Schütze, H. (1992). Context space. In Goldman, R. (Ed.), *Proceedings of the 1992 AAAI Fall Symposium on Probabilistic Approaches to Natural Language*.
- Séaghdha, D. O. (2010). Latent variable models of selectional preference. In *ACL 2010*, pp. 435–444.
- Simmons, R. F. (1973). Semantic networks: Their computation and use for understanding English sentences. In Schank, R. C. and Colby, K. M. (Eds.), *Computer Models of Thought and Language*, pp. 61–113. W.H. Freeman and Co.
- Surdeanu, M., Harabagiu, S., Williams, J., and Aarseth, P. (2003). Using predicate-argument structures for information extraction. In *ACL-03*, pp. 8–15.
- Surdeanu, M., Johansson, R., Meyers, A., Márquez, L., and Nivre, J. (2008). The conll-2008 shared task on joint parsing of syntactic and semantic dependencies. In *CoNLL-08*, pp. 159–177.
- Swier, R. and Stevenson, S. (2004). Unsupervised semantic role labelling. In *EMNLP 2004*, pp. 95–102.
- Tannen, D. (1979). What’s in a frame? Surface evidence for underlying expectations. In Freedle, R. (Ed.), *New Directions in Discourse Processing*, pp. 137–181. Ablex.
- Tesnière, L. (1959). *Éléments de Syntaxe Structurale*. Librairie C. Klincksieck, Paris.
- Titov, I. and Khoddam, E. (2014). Unsupervised induction of semantic roles within a reconstruction-error minimization framework. In *NAACL HLT 2015*.
- Titov, I. and Klementiev, A. (2012). A Bayesian approach to unsupervised semantic role induction. In *EACL-12*, pp. 12–22.
- Wilks, Y. (1973). An artificial intelligence approach to machine translation. In Schank, R. C. and Colby, K. M. (Eds.), *Computer Models of Thought and Language*, pp. 114–151. W.H. Freeman.
- Wilks, Y. (1975a). Preference semantics. In Keenan, E. L. (Ed.), *The Formal Semantics of Natural Language*, pp. 329–350. Cambridge Univ. Press.
- Wilks, Y. (1975b). A preferential, pattern-seeking, semantics for natural language inference. *Artificial Intelligence*, 6(1), 53–74.
- Winston, P. H. (1977). *Artificial Intelligence*. Addison Wesley.
- Woodsend, K. and Lapata, M. (2015). Distributed representations for unsupervised semantic role labeling. In *EMNLP 2015*, pp. 2482–2491.
- Xue, N. and Palmer, M. (2004). Calibrating features for semantic role labeling. In *EMNLP 2004*.

Zapirain, B., Agirre, E., Màrquez, L., and Surdeanu, M. (2013). Selectional preferences for semantic role classification. *Computational Linguistics*, 39(3), 631–663.

Zhao, H., Chen, W., Kit, C., and Zhou, G. (2009). Multilingual dependency learning: A huge feature engineering method to semantic dependency parsing. In *CoNLL-09*, pp. 55–60.

Zhou, J. and Xu, W. (2015). End-to-end learning of semantic role labeling using recurrent neural networks. In *ACL 2015*, pp. 1127–1137.