


Counting Rules

Counting operations on n objects




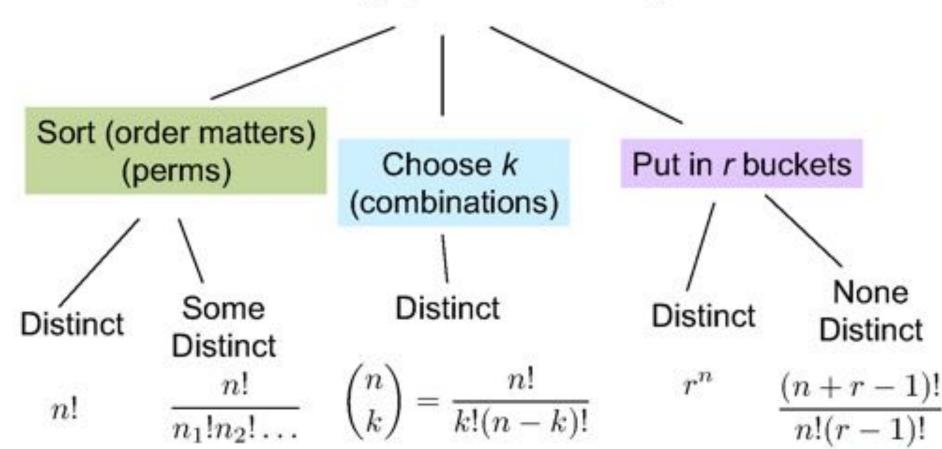

Counting



Counting

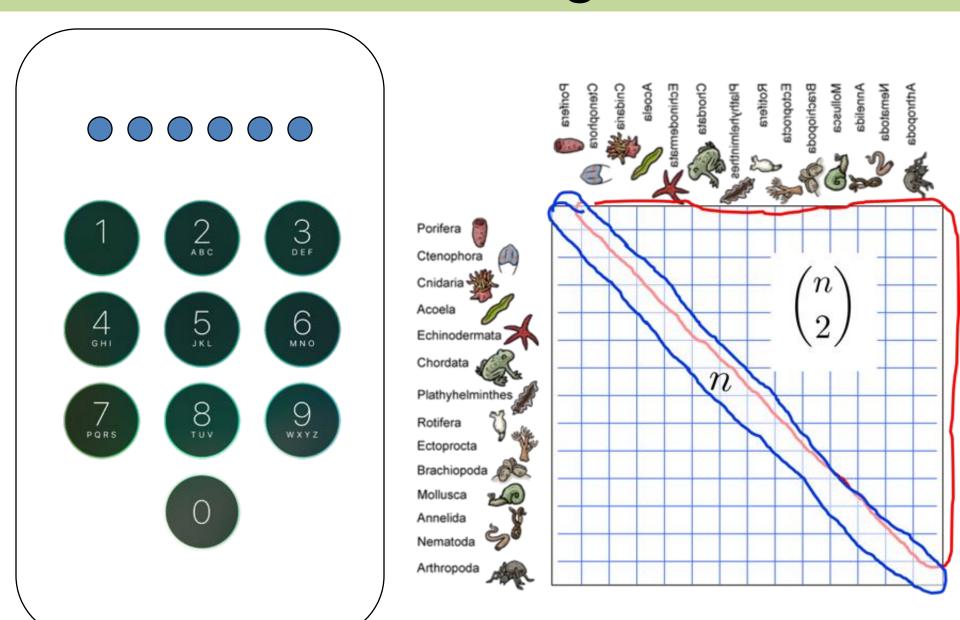

What is a Probability?

$$P(E) = \lim_{n \to \infty} \frac{n(E)}{n}$$




Sources of Probability



1. Experimentation










4. Expert Opinion



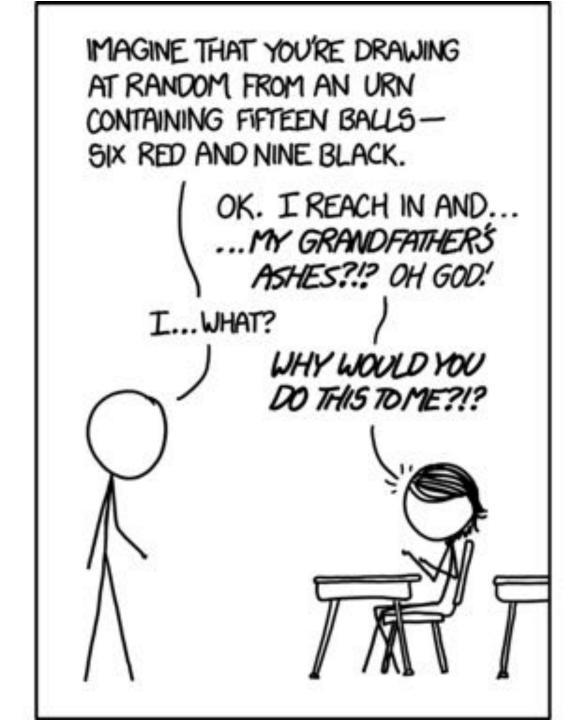






Target Revisited



NEW

Thrown: 309



$$\frac{59}{309} = 0.191$$

Screen size = 800x800Radius of target = 200

The dart is equally likely to land anywhere on the screen.

What is the probability of hitting the target?

$$|S| = 800^2$$

$$|E| = \pi 200^2$$

$$p(E) = \frac{\pi \cdot 200^2}{800^2} \approx 0.1963$$

Sending Bit Strings

- Bit string with m 0's and n 1's sent on network
 - All distinct arrangements of bits equally likely
 - E = first bit received is a 1
 - F = k of first r bits received are 1's

P(E|F)?



*Think of the bits as distinct so that all outcomes are equally likely

Everything in the world is either



a potato

or not a potato.

$$P(X) + P(X^C) = 1$$



WHEN YOU MEET YOUR BEST FRIEND

Somewhere you didn't expect to.



Trailing the dovetail shuffle to it's lair - Persi Diaconosis

Netflix and Learn

What is the probability that a user will watch Life is Beautiful?

P(E)



$$P(E) = \lim_{n \to \infty} \frac{n(E)}{n} \approx \frac{\# \text{people who watched movie}}{\# \text{people on Netflix}}$$

$$P(E) = 10,234,231 / 50,923,123 = 0.20$$



Let's Make a Deal

Game show with 3 doors: A, B, and C




- Behind one door is prize (equally likely to be any door)
- Behind other two doors is nothing
- We choose a door
- Then host opens 1 of other 2 doors, revealing nothing
- We are given option to change to other door
- Should we?
 - Note: If we don't switch, P(win) = 1/3 (random)






Third Ever Sections

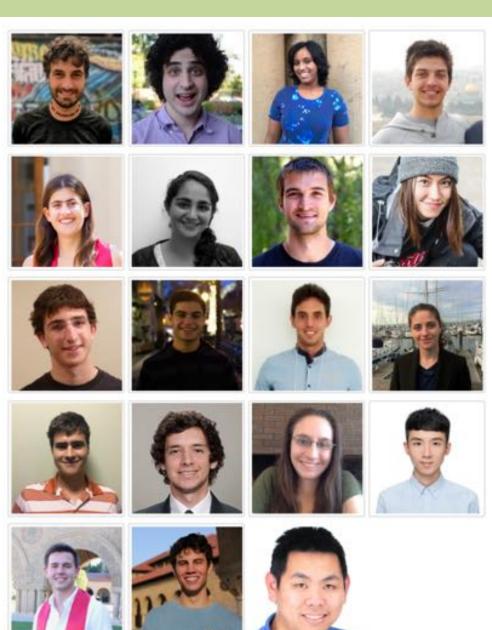

Third Ever Sections







X		0
0	X	
		X

Zika Test



Positive Zika.


What is the probability of zika?

- 0.1% of people have zika
- 90% positive rate for people with zika
- 7% positive rate for people without zika


The right answer is 1%




Bayes Theorem Intuition

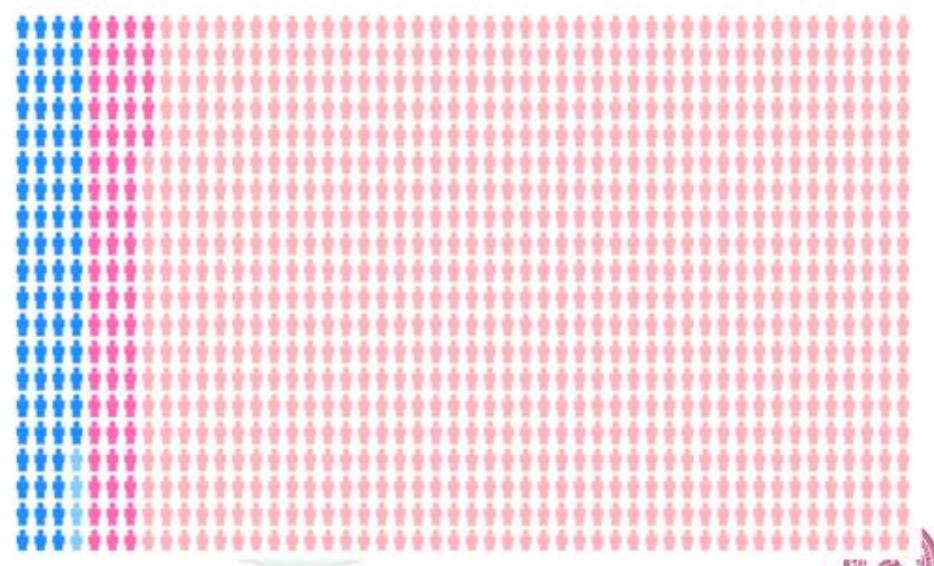

Update Belief

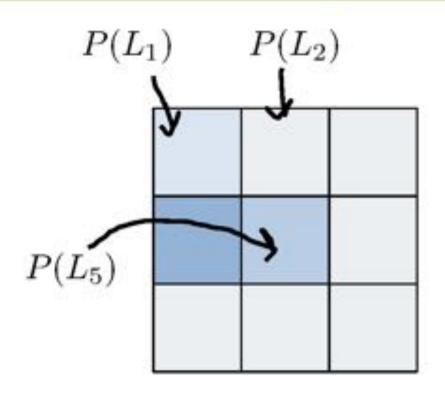

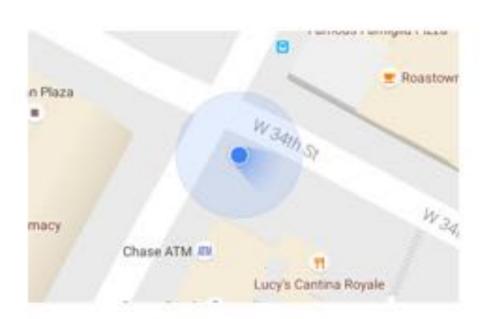


Before Observation




Recall our Ebola Bats



Discovered Pattern

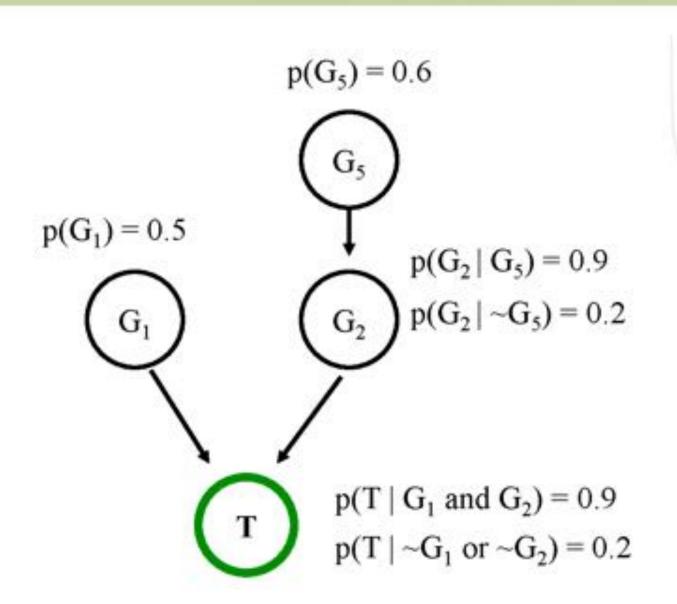



These genes don't impact T








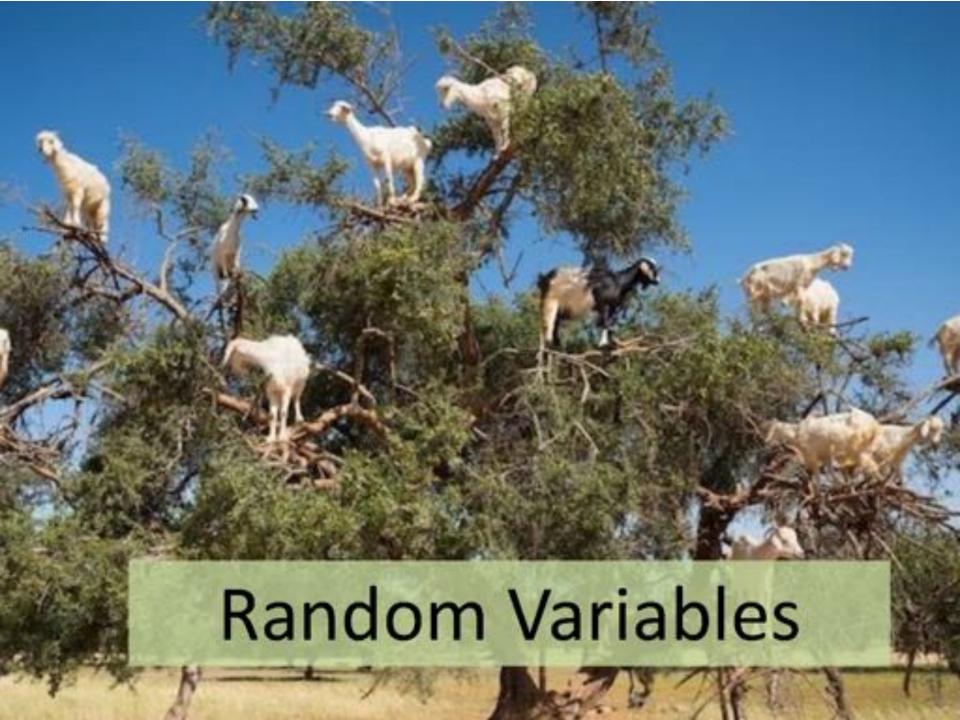

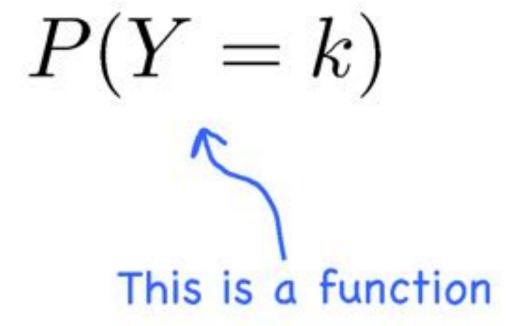

For example Y is the number of heads in 5 coin flips

Fundamental Properties

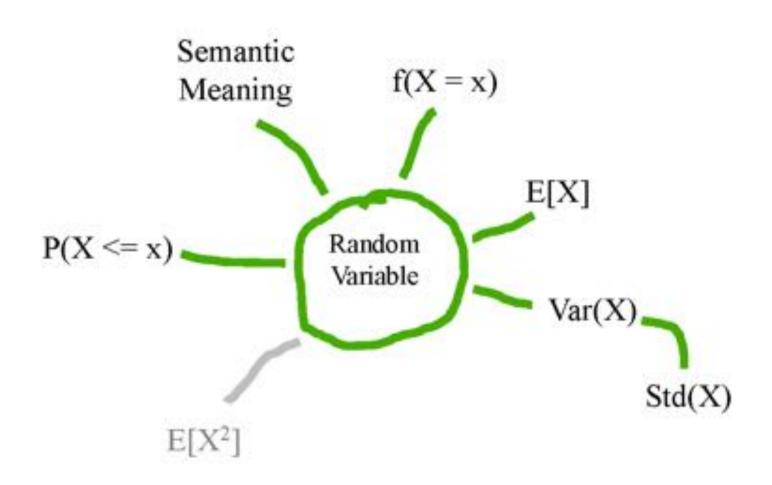

Expectation


Big deal lemma: first stated without proof

$$E[X + Y] = E[X] + E[Y]$$

Generalized:
$$E\left[\sum_{i=1}^{n} X_{i}\right] = \sum_{i=1}^{n} E[X_{i}]$$

Holds regardless of dependency between X_i 's


St Petersburg




- We have a fair coin (come up "heads" with p = 0.5)
- Let n = number of coin flips ("heads") before first "tails"
- You win \$2ⁿ

How much would you pay to play?

X is the score a peer grader gives to an assignment submission

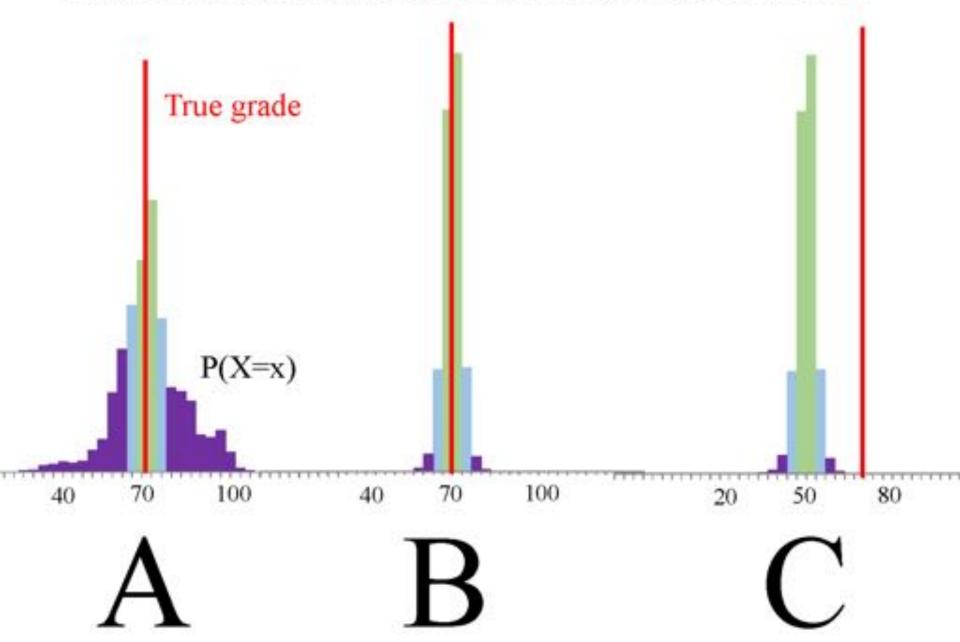

Binomial

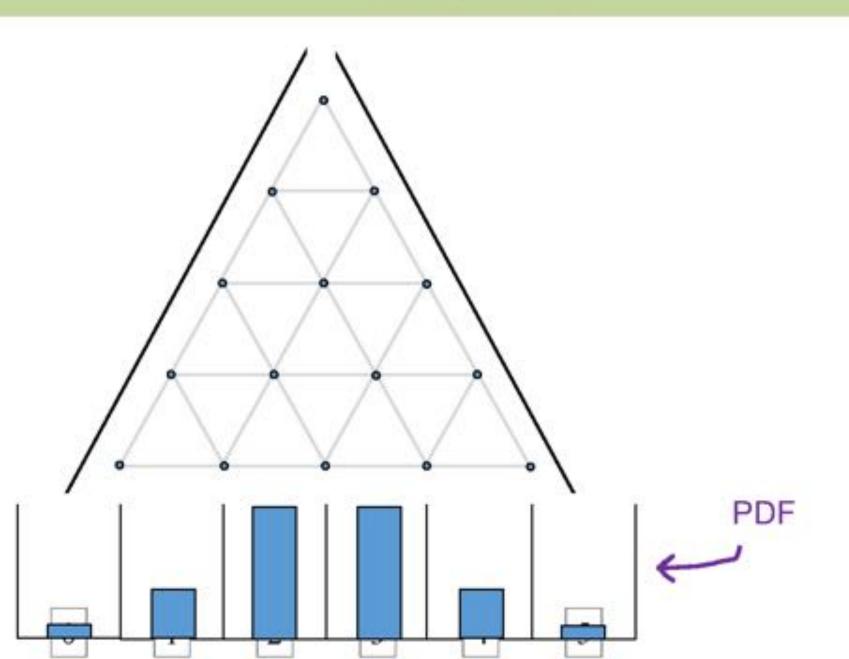




Poisson




Geometric

Sequence 1:

Storing Data on DNA

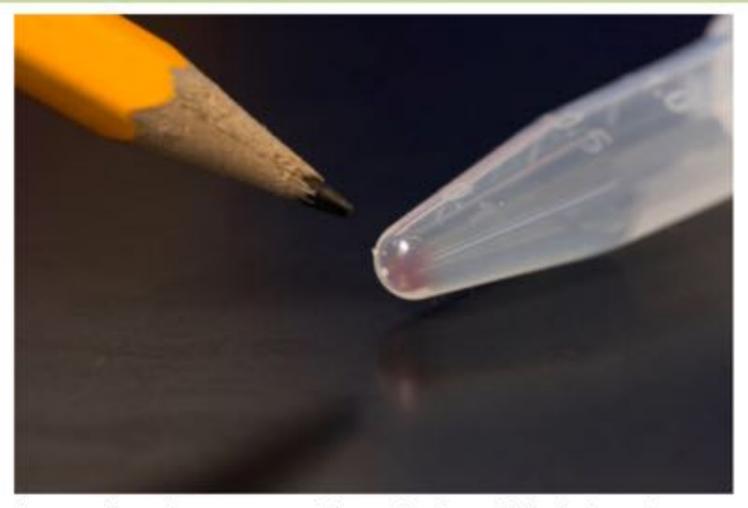

All the movies, images, emails and other digital data from more than 600 smartphones (10,000 gigabytes) can be stored in the faint pink smear of DNA at the end of this test tube.

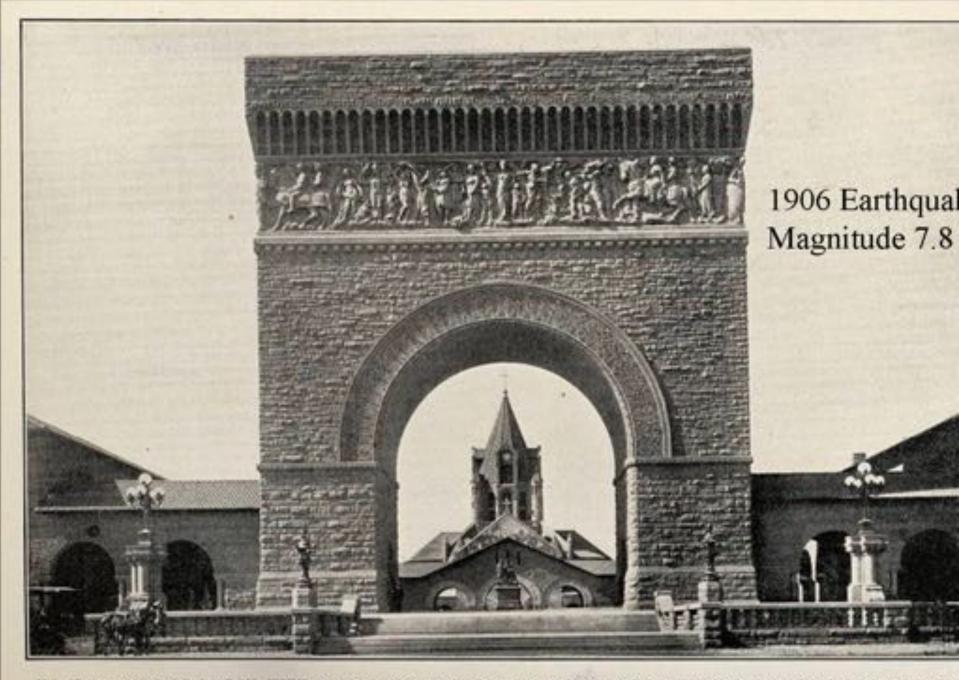

ILL, No. 65. MEMORIAL ARCH, WITH CHURCH IN BACKGROUND, STANFORD UNIVERSITY, SHOWING TYPES OF CARVED WO WITH THE SANDSTONE.



Bit Coin Mining

You "mine a bitcoin" if, for given data D, you find a number N such that Hash(D, N) produces a string that starts with g zeroes.



Representative Juries



Simulate

Simulation:




























Dating at Stanford

Each person you date has a 0.2 probability of being someone you spend your life with. What is the average number of people one will date? What is the standard deviation?



Bloom Filter

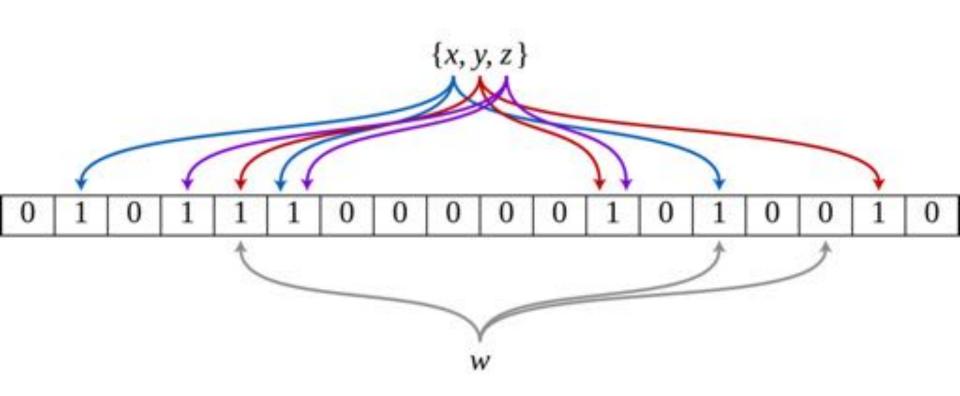


random()?


Riding the Marguerite




You are running to the bus stop. You don't know exactly when the bus arrives. You arrive at 2:20pm.

What is P(wait < 5 min)?

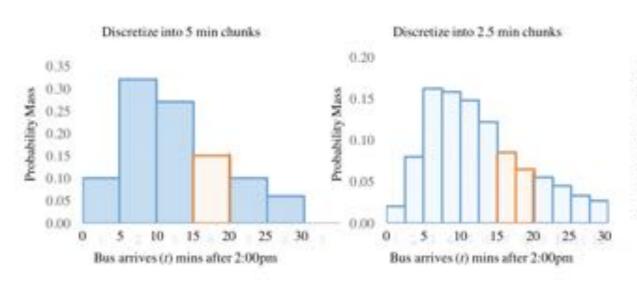



Integrals

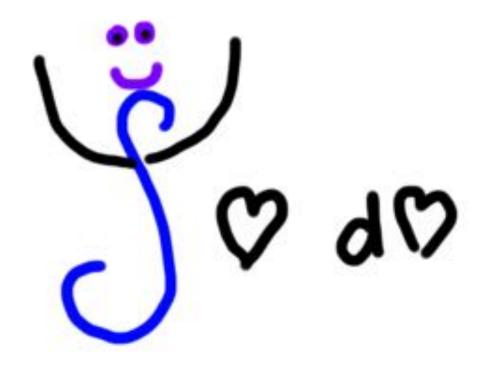


*loving, not scary

What do you get if you integrate over a probability density function?

A probability!

Climate Sensitivity

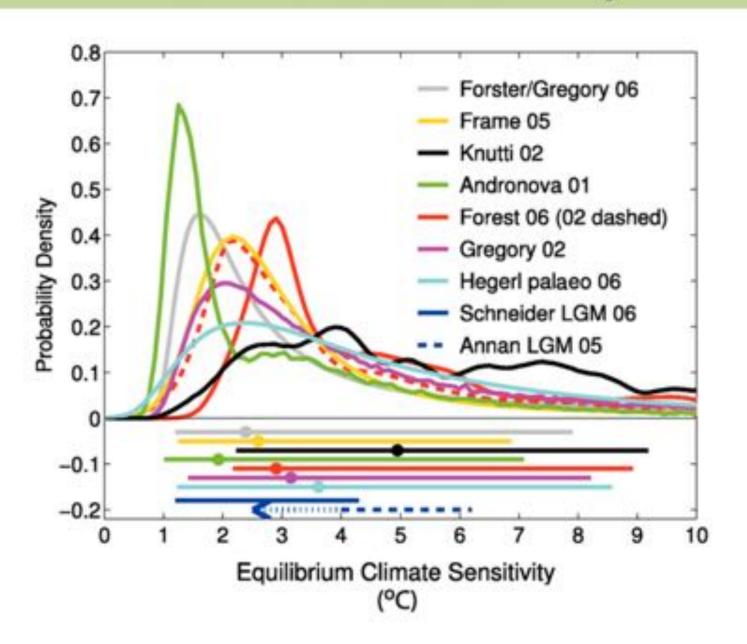


Probability Density Function

$$f(x) = \frac{1}{\sigma\sqrt{2\pi}}e^{\frac{-(x-\mu)^2}{2\sigma^2}}$$


x

Simplicity is Humble

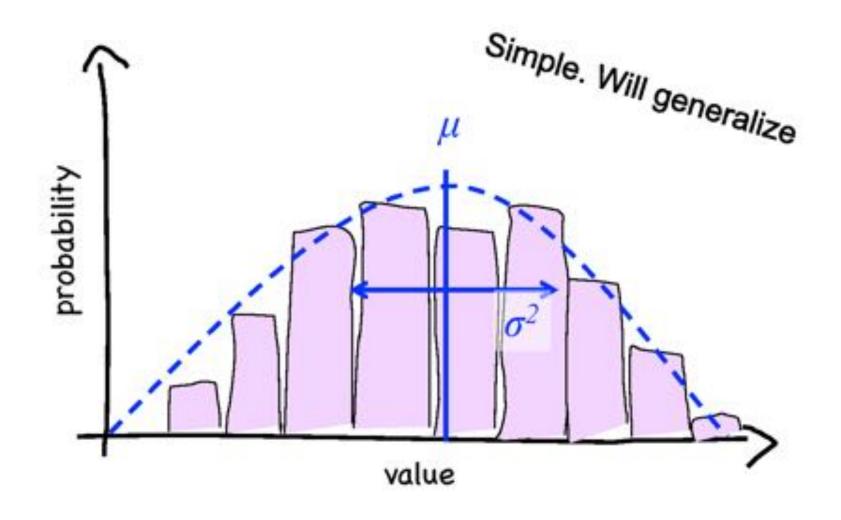

^{*} A Gaussian maximizes entropy for a given mean and variance

PDF and CDF of a Normal

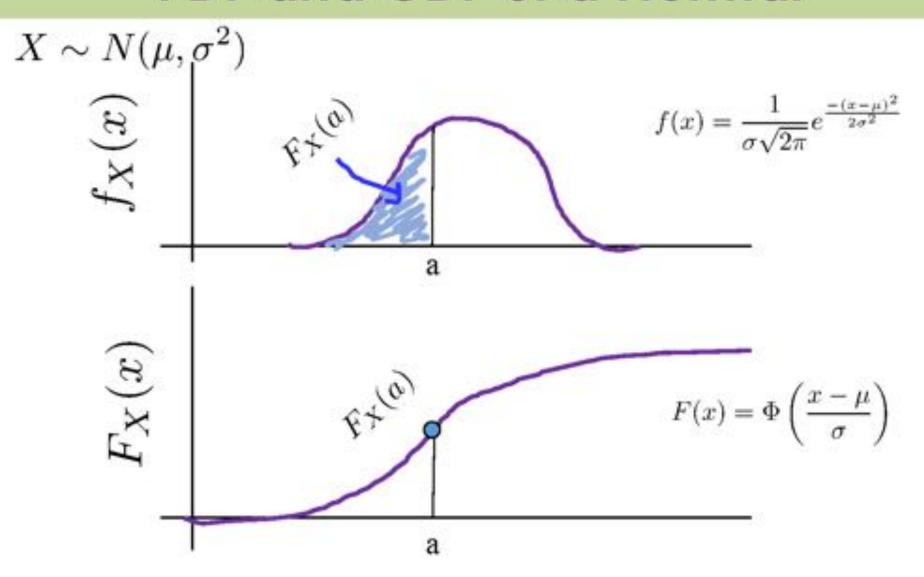


A CDF is the integral from –infinity to x of the PDF

Altruism?

Scores for a standardized test that students in Poland are required to pass before moving on in school

See if you can guess the minimum score to pass the test.

2.1. Poziom podstawowy

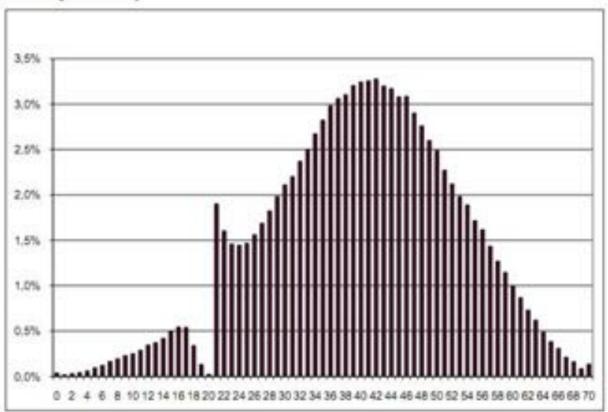

Wykres 1. Rozkład wyników na poziomie podstawowym

Will the Warriors Win?



What is the probability that the Warriors beat the Blazers?

How do you model zero sum games?

ELO Ratings

How it works:

- Each team has an "ELO" score S, calculated based on their past performance.
- Each game, the team has ability A ~ N(S, 200²)
- The team with the higher sampled ability wins.



Arpad Elo

$$A_B \sim \mathcal{N}(1555, 200^2)$$
 $A_W \sim \mathcal{N}(1797, 200^2)$

A 1555 1797 ability

$$P(\text{Warriors win}) = P(A_W > A_B)$$




Joint Distributions




Go to this URL: https://goo.gl/Jh3Eu4

Joint Probability Table


	Roommates	2RoomDbl	Shared Partner	Single	
Frosh	0.30	0.07	0.00	0.00	0.37
Soph	0.12	0.18	0.00	0.03	0.32
Junior	0.04	0.01	0.00	0.10	0.15
Senior	0.01	0.02	0.02	0.01	0.05
5+	0.02	0.00	0.05	0.04	0.11
	0.49	0.27	0.07	0.18	1.00

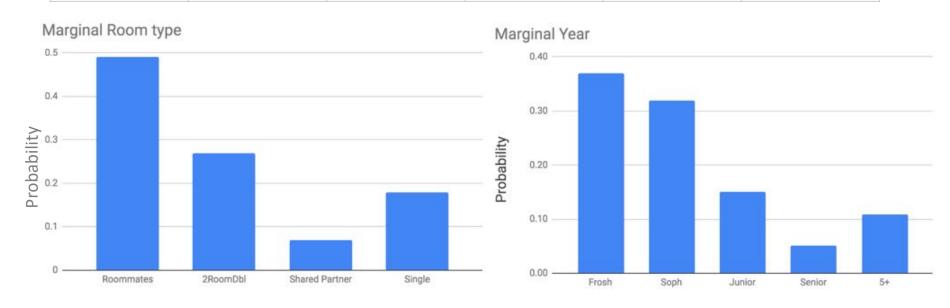


Algorithmic Fairness

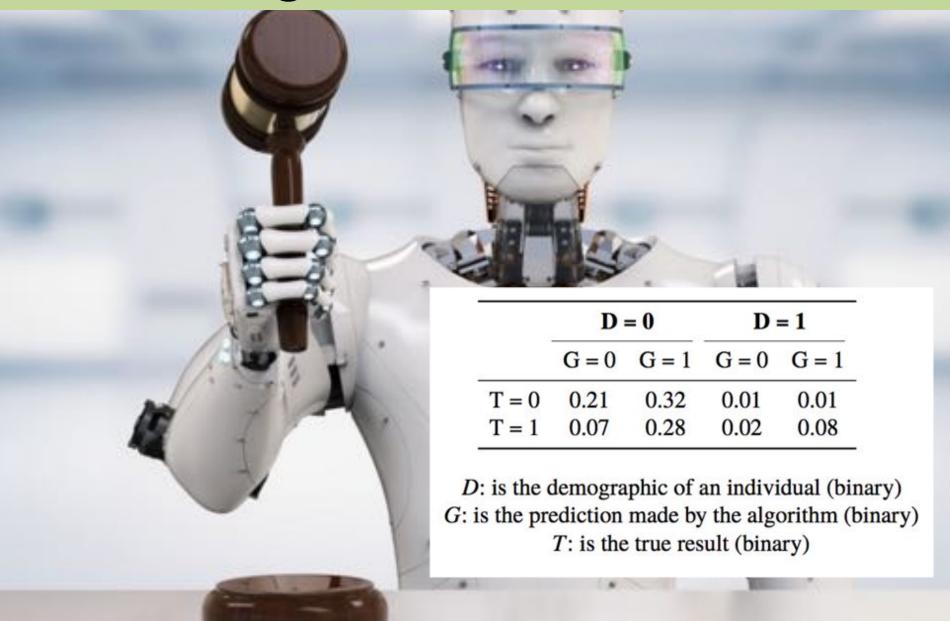

Joint Dart Distribution

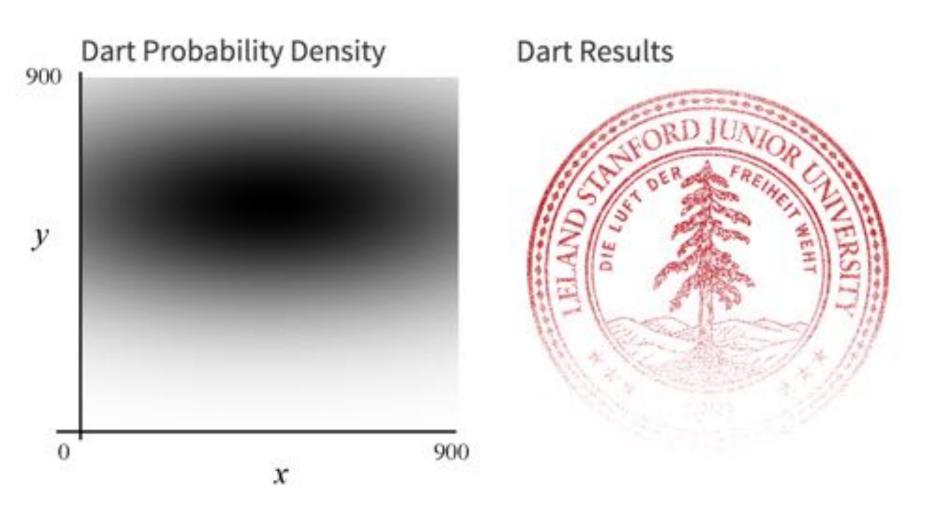

Joint Dart Distribution

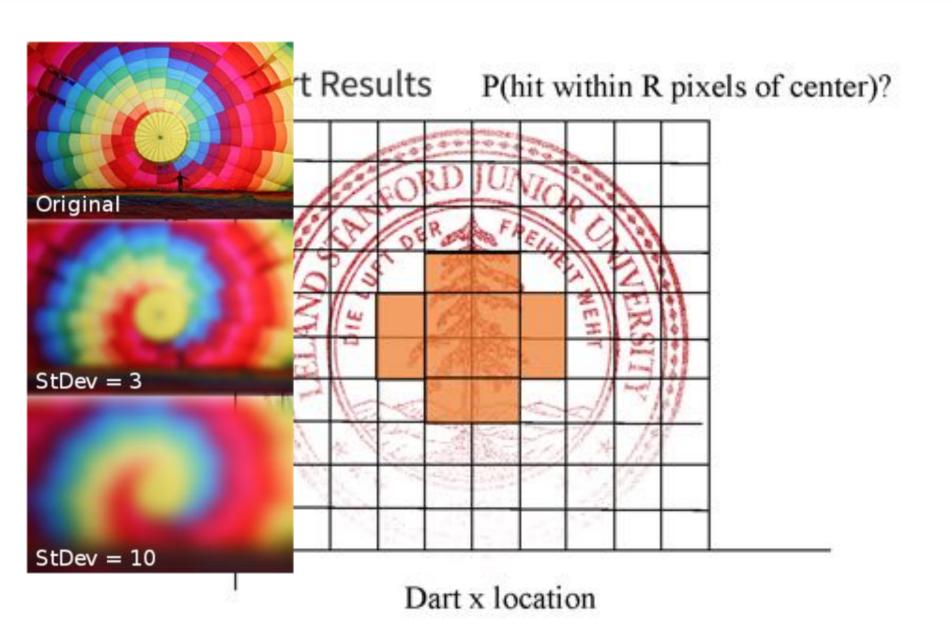

Multinomial

Example document:

this document | spam

"Pay for Viagra with a credit-card. Viagra is great. So are credit-cards. Risk free Viagra. Click for free."

$$n = 18$$

$$\begin{array}{c} \text{Viagra} = 2 \\ \text{Free} = 2 \\ \text{Risk} = 1 \\ \text{Credit-card: 2} \end{array} | \text{spam} \\ \end{array} = \frac{n!}{2!2! \dots 2!} p_{\text{viagra}}^2 p_{\text{free}}^2 \dots p_{\text{for}}^2 \\ \vdots \\ \text{For} = 2 \\ \end{array}$$



Midterm (part 1)



2





 \bigcirc 3




Midterm (part 2)





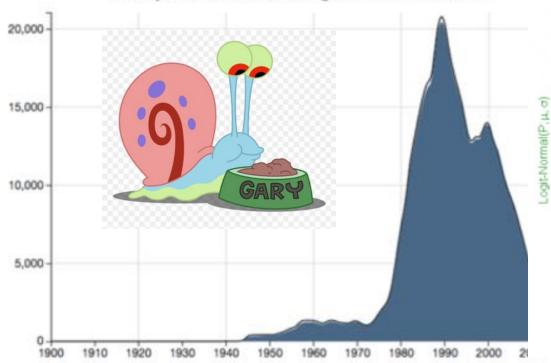



Examples of the Logit-Normal Distribution

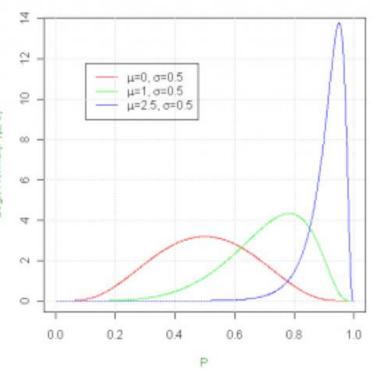

The median living girl named Lauren was born around 1992 and ranges from 16 to 29 years old.


Midterm Distribution

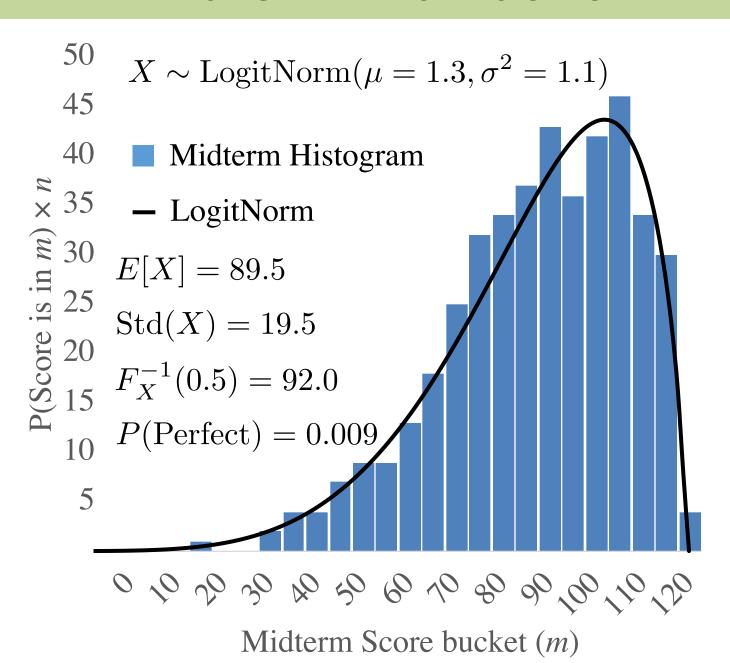

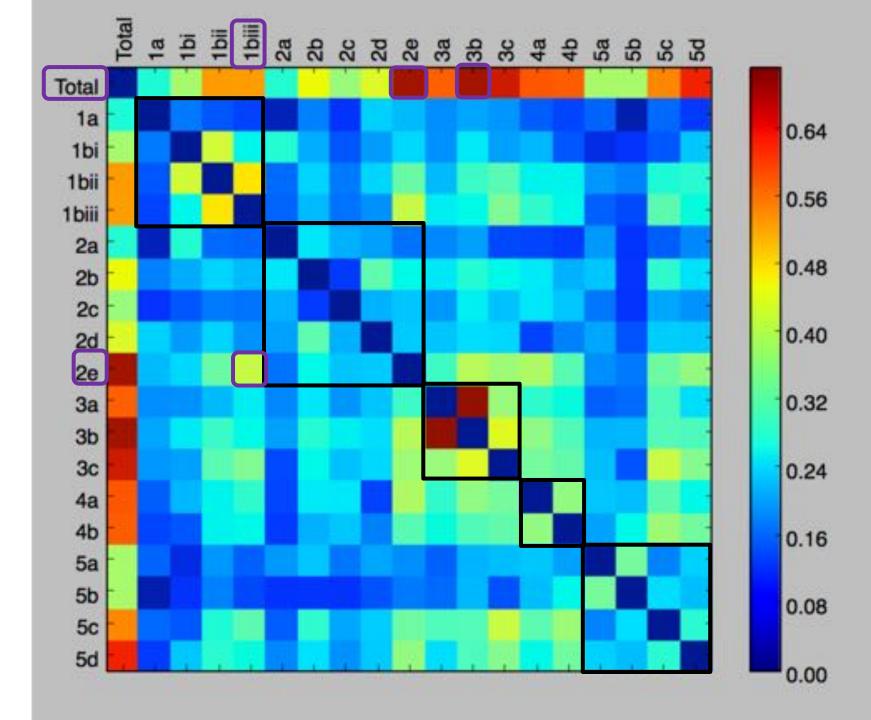



Biometric Keystroke

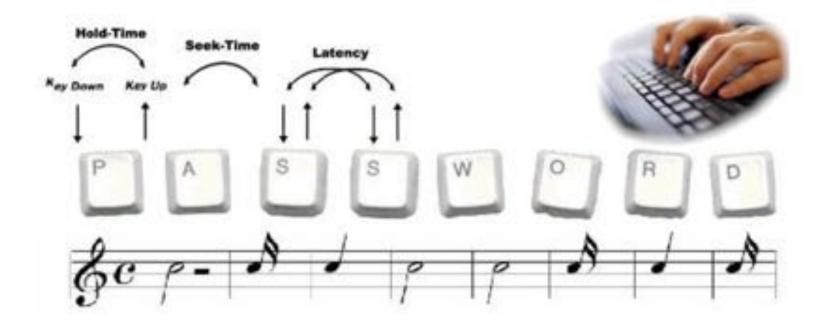



Enchanted Die




Mystery: Why is Binomial Normal?

Mystery: Why is the sum of IID uniforms normal?


Mystery: Why is the mean of IID vars normal?

C.L.T. Explains This

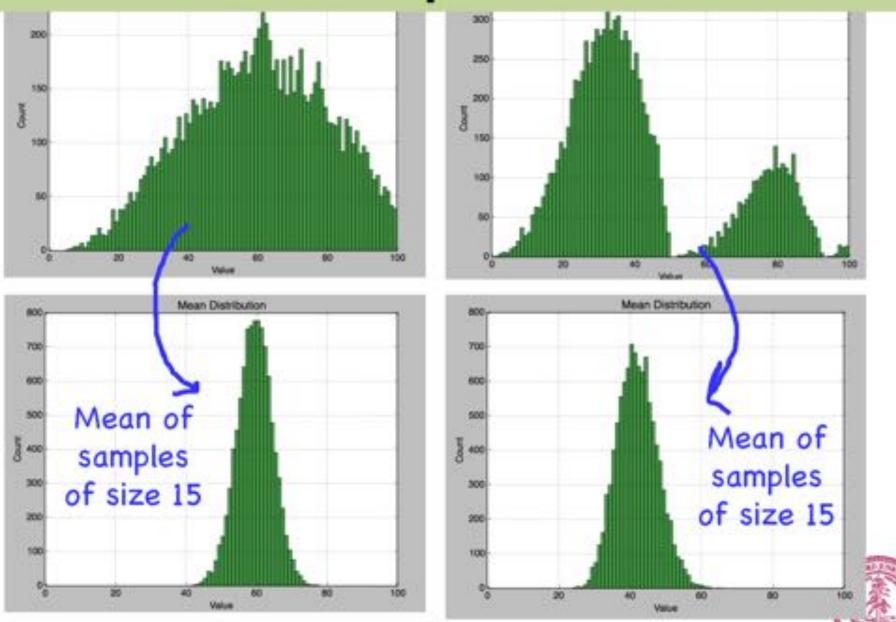

Piech, CS106A, Stanford University


C.L.T. Explains This

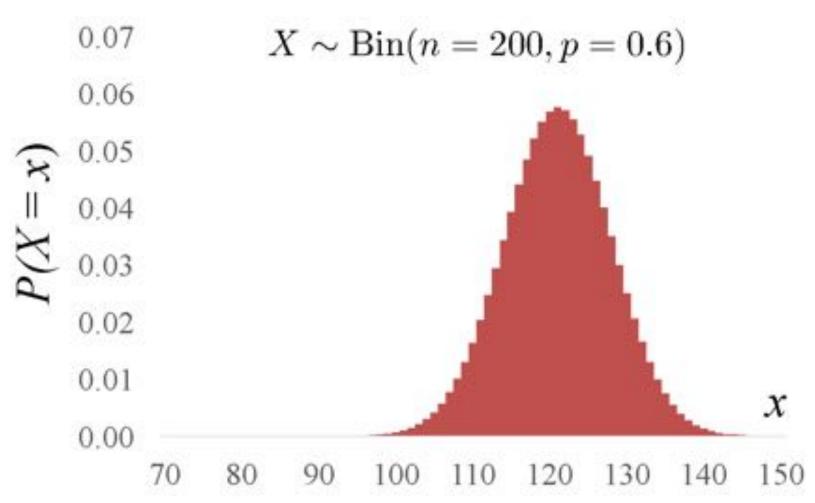



C.L.T. Explains This

Problem set 5: What is the sum of IID uniforms?

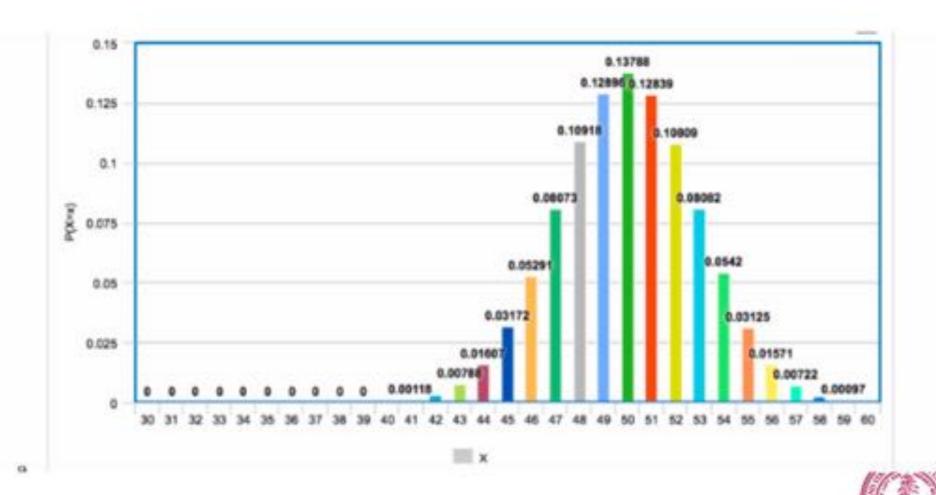


Machine Learning Example

- You want to know the true mean and variance of happiness in Buthan
 - But you can't ask everyone.
 - Randomly sample 200 people.
 - Your data looks like this:


 The mean of all of those numbers is 83. Is that the true average happiness of Bhutanese people?

Population

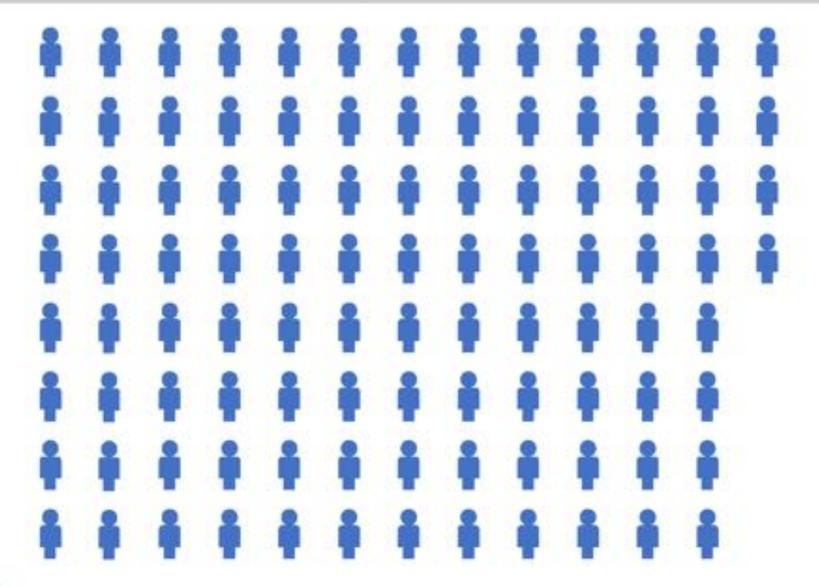




Sample

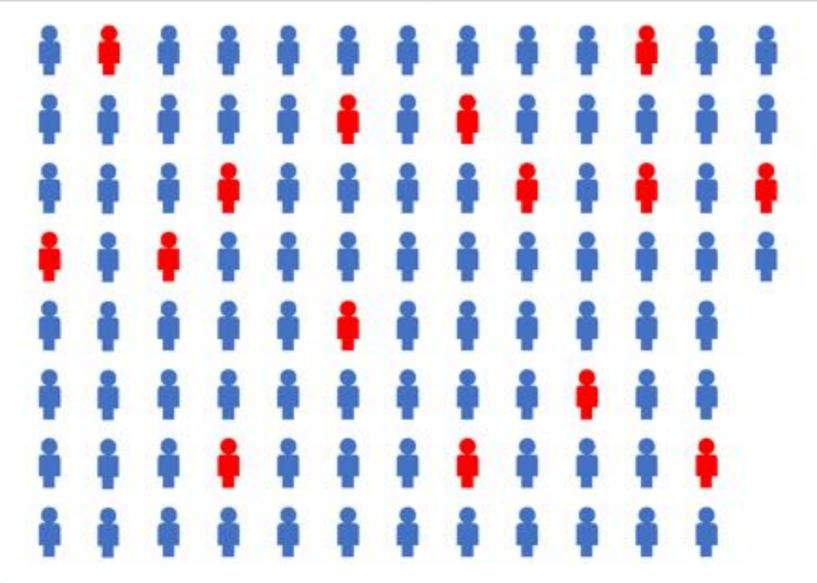




Sample

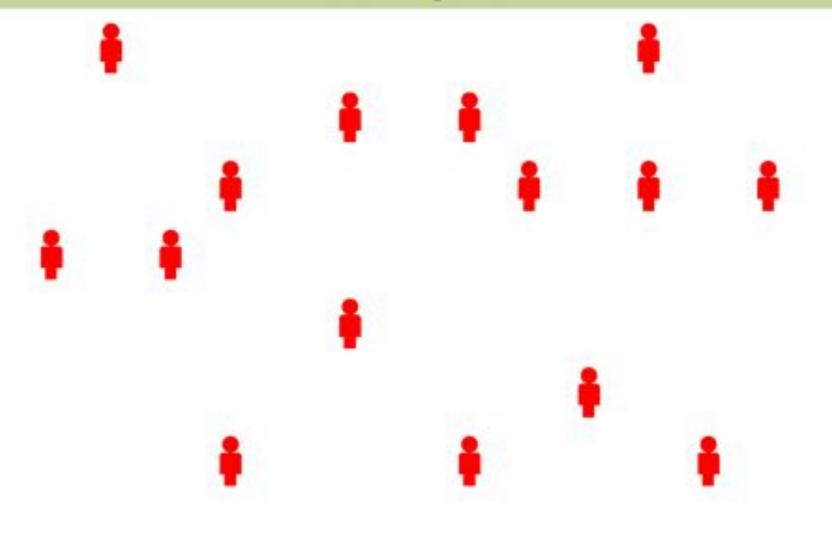

Collect one (or more) numbers from each person




Universal Sample

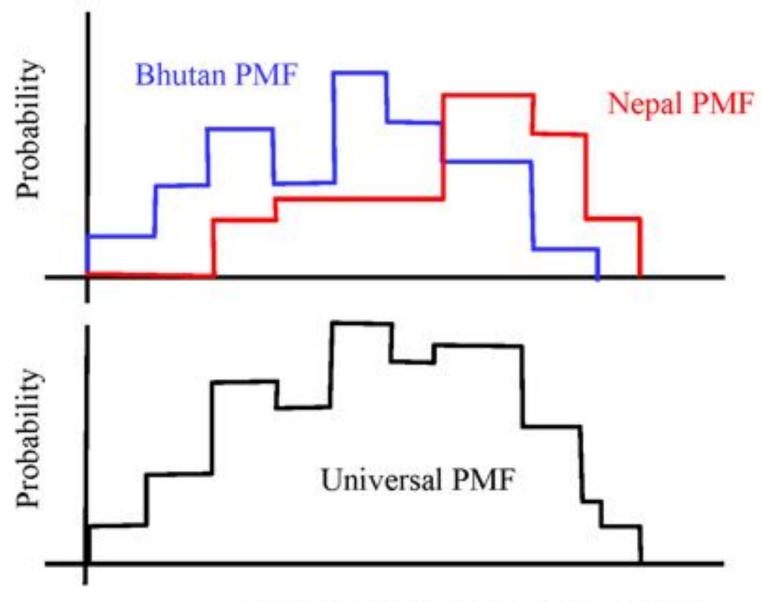




Peer Grading

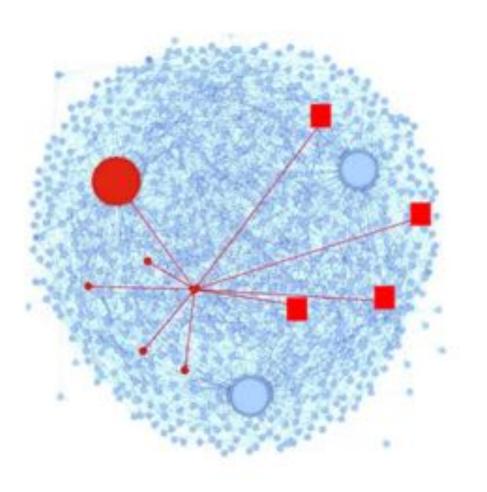

Peer Grading on Coursera HCI.

31,067 peer grades for 3,607 students.

A/B Testing

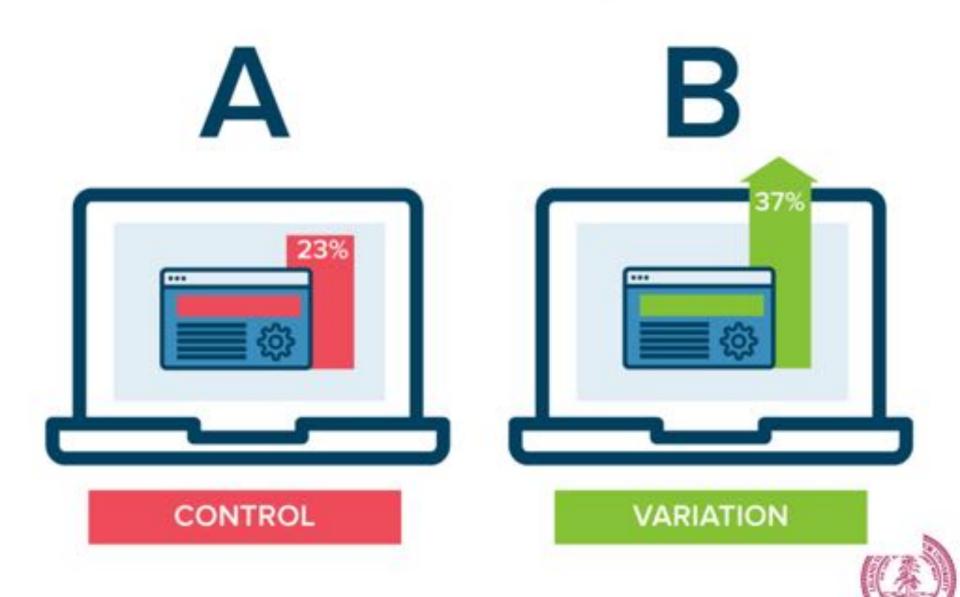

Thompson Sampling







NEW

General "Inference"

tom Checker BETA


SYMPTOMS QUESTIONS CONDITIONS DETAILS TREATMENT

Add more symptoms

Type your main symptom here

or Choose common symptoms



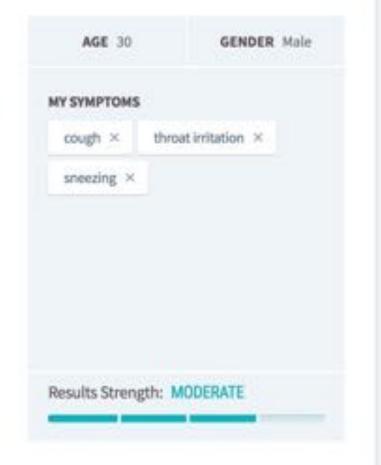


Info:

Lots of Random Vars?



NEW

Bayes Nets!

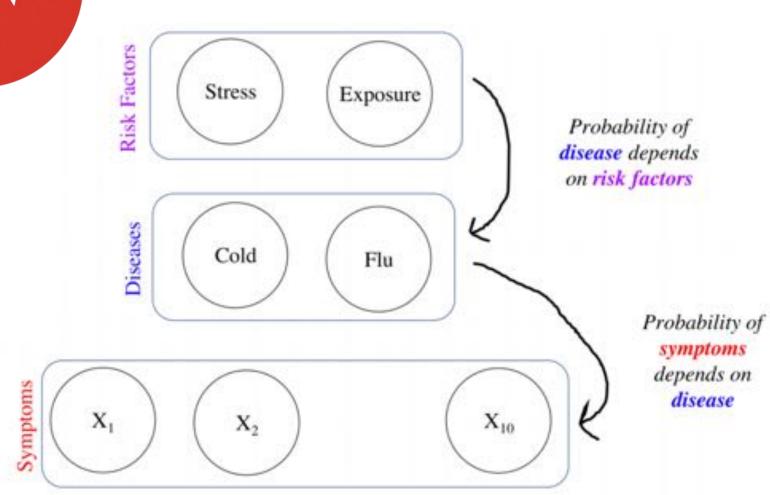

Alg #1: Joint Sampling

```
0,
                                   0, 0]
                                            Each one of these is
                                            one posterior sample:
            ram: Joint S
                                   0,
                                      0]
                             [0,
                                      0]
            multivariate
      where conditioned
                             [0,
                                1,
                                           [Flu, Ugrad, Fever, Tired]
10
    def main():
         obs = getObserv
         print 'Observat
                             [0,
13
         prob = probFluG
                             [0, 1,
                             Observation =
                                           [None, None, None, 1]
         print 'Pr(Flu)
16
                             Pr(Flu |
                                     Obs)
                                             0.140635888502
```

Alg #2: MCMC


```
101.0,
    0, 101.0, 1]
[1, 0, 101.0, 0]
[1, 0, 101.0, 1]
[1, 0, 101.0, 1]
[1, 1, 101.0, 1]
[1, 1, 101.0, 1]
[1, 1, 101.0, 1]
[1, 1, 101.0, 1]
[1, 1, 101.0, 1]
[1, 1, 101.0, 1]
[1, 1, 101.0, 1]
[1, 0, 101.0, 1]
[1, 1, 101.0, 1]
[1, 1, 101.0, 1]
Pr(Flu) = 0.9773
```

MCMC is a way to sample with conditioned variables fixed

Each one of these is one joint sample:


[Flu, Undergrad, Fever, Tired]

Towards Machine Learning

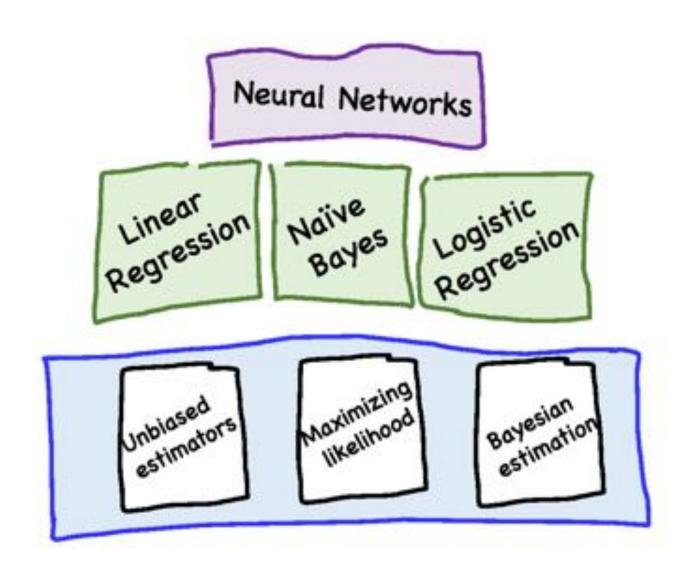


MLE: Likelihood of Data


Likelihood of Data from a Normal

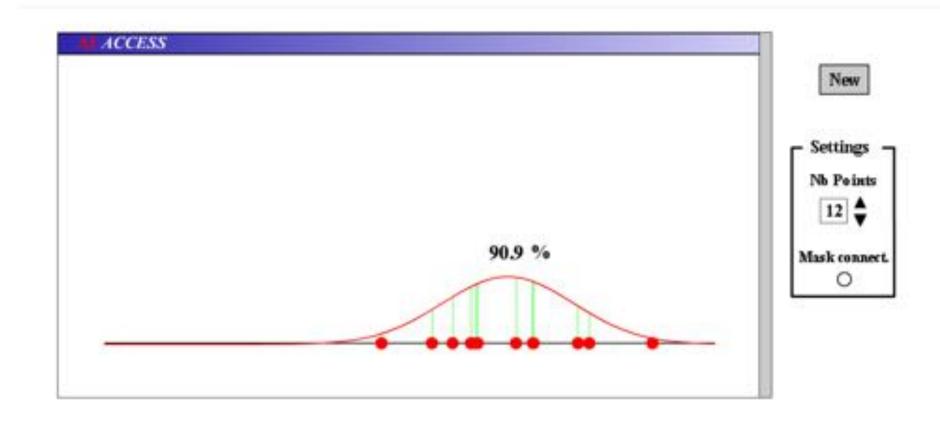

Gumbel Fit

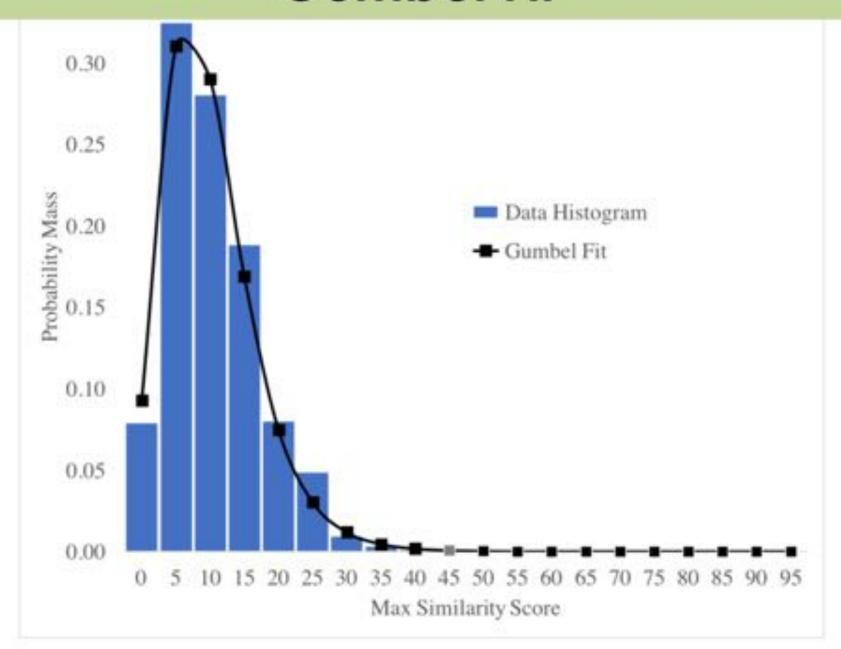

MAP: Most Probable Parameter

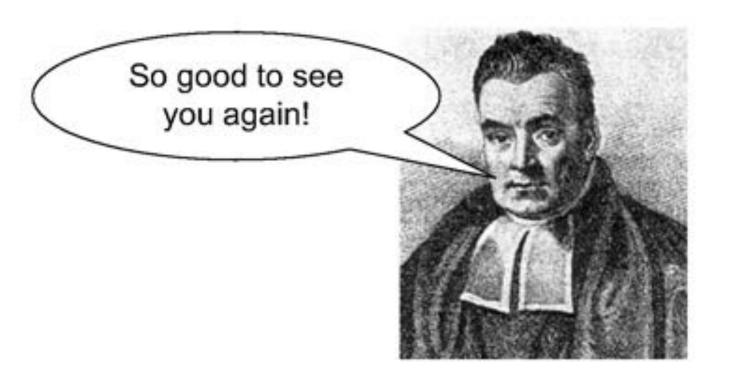

Machine Learning

Heart




Ancestry




Netflix



Logistic Regression

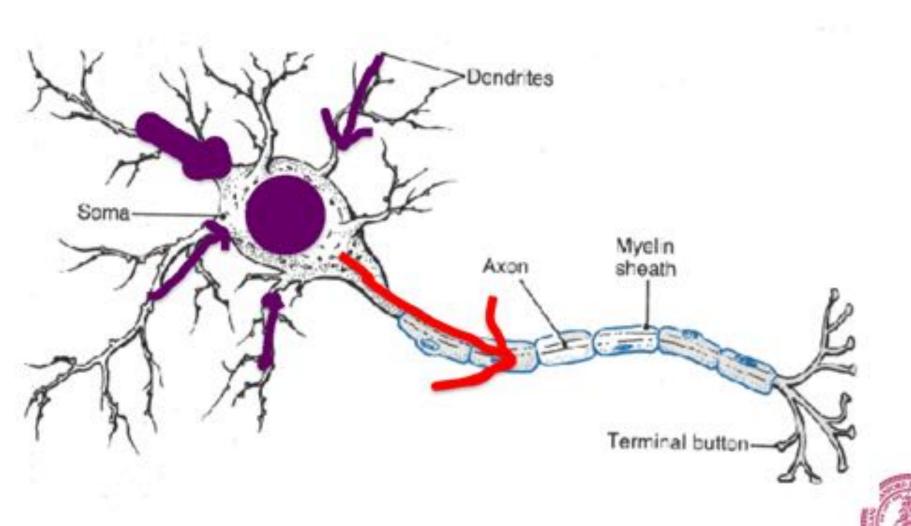

Deep Learning

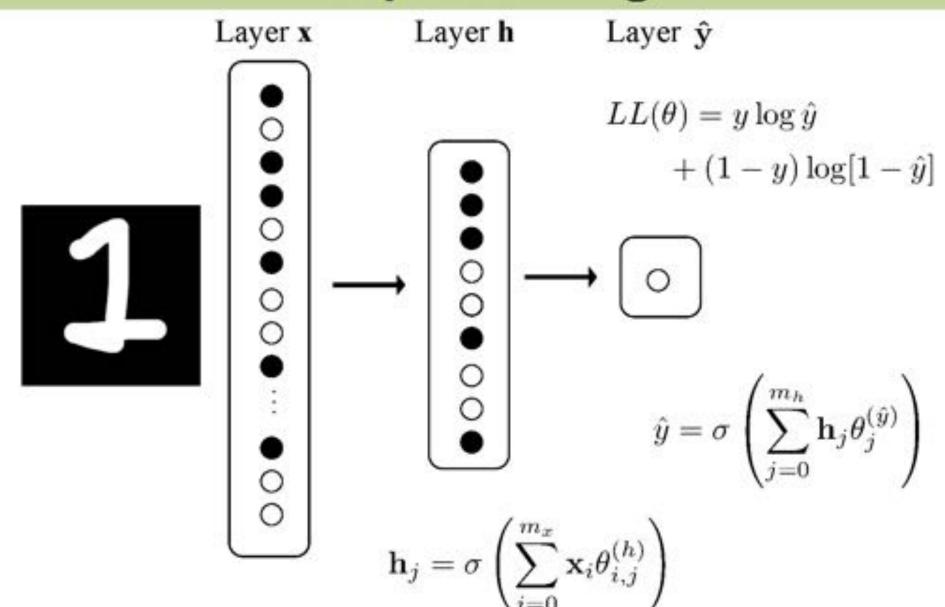

By the numbers

~600 Fruit



~ 30 Major Keys



Naïve Bayes Assumption:

$$P(\mathbf{x}|y) = \prod_{i} P(x_i|y)$$


1 Contest



Thomas Bayes

 Rev. Thomas Bayes (1702 –1761) was a British mathematician and Presbyterian minister





- He looked remarkably similar to Charlie Sheen
 - But that's not important right now...

Jacob Bernoulli

 Jacob Bernoulli (1654-1705), also known as "James", was a Swiss mathematician





- One of many mathematicians in Bernoulli family
- The Bernoulli Random Variable is named for him
- He is my academic great¹²-grandfather
- Same eyes as Ice Cube

Simeon-Denis Poisson

 Simeon-Denis Poisson (1781-1840) was a prolific French mathematician






- Published his first paper at 18, became professor at 21, and published over 300 papers in his life
 - He reportedly said "Life is good for only two things, discovering mathematics and teaching mathematics."
- I'm going with French Martin Freeman

Carl Friedrich Gauss


 Carl Friedrich Gauss (1777-1855) was a remarkably influential German mathematician





- Started doing groundbreaking math as teenager
 - Did not invent Normal distribution, but popularized it
- He looked like Martin Sheen
 - Who is, of course, Charlie Sheen's father



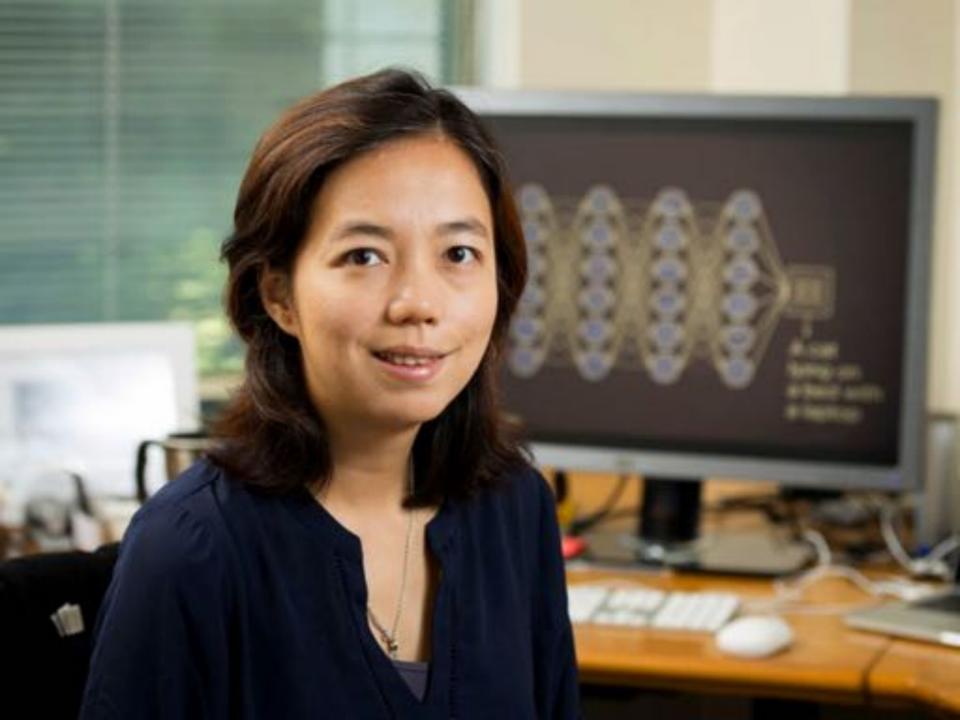


Proximal Concepts

Bounds: Markov's Inequality

Say X is a non-negative random variable

$$P(X \ge a) \le \frac{E[X]}{a}$$
, for all $a > 0$

- Proof:
 - I = 1 if $X \ge a$, 0 otherwise
 - Since $X \ge 0$, $I \le \frac{X}{a}$
 - Taking expectations:






Markov and the Midterm

- Statistics from CS109 midterm
 - X = midterm score
 - Using sample mean $\overline{X} = 102.0 \approx E[X]$
 - What is $P(X \ge 110)$?

$$P(X \ge 110) \le \frac{E[X]}{110} = \frac{102}{110} = 0.93$$


- Markov bound: ≤ 93% of class scored 110 or greater
- In fact, 15.1% of class scored 110 or greater
 - Markov inequality can be a very loose bound
 - But, it made <u>no</u> assumption at all about form of distribution!

Learn Bayes Nets Params?

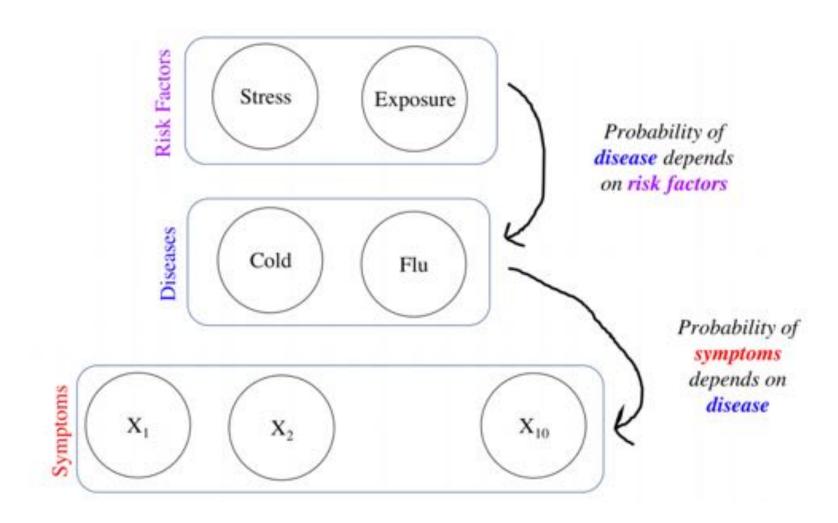

* That is what we did with Naïve Bayes

Learn Bayes Nets Structure?

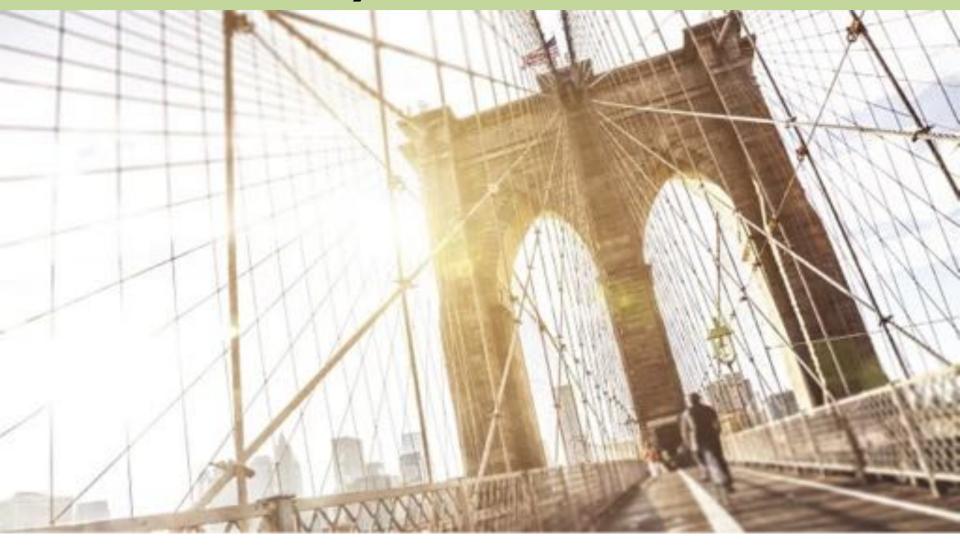

* That is what we did with Ebola Bats!


Missing Data?

Missing Not at Random: You collect data on whether or not people intend to vote for Ayesha, a candidate in an upcoming election. You send an electronic poll to 100 randomly chosen people. You assume all 100 responses are IID.

User Response	Count
Responded that they will vote for Ayesha	40
Responded that they will not vote for Ayesha	45
Did not respond	15

* Scratched the surface in section

Temporal Patterns?

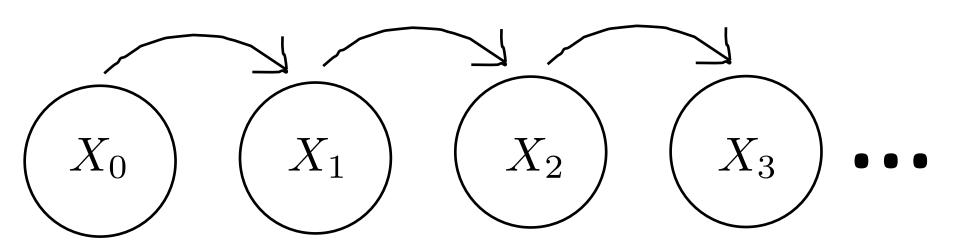

* Special type of Bayesian Network called a Markov Network

Ethics and Al

Ethics and Datasets?






Sometimes machine learning feels universally unbiased.

We can even call some estimators "unbiased"

Google/Nikon/HP had biased datasets

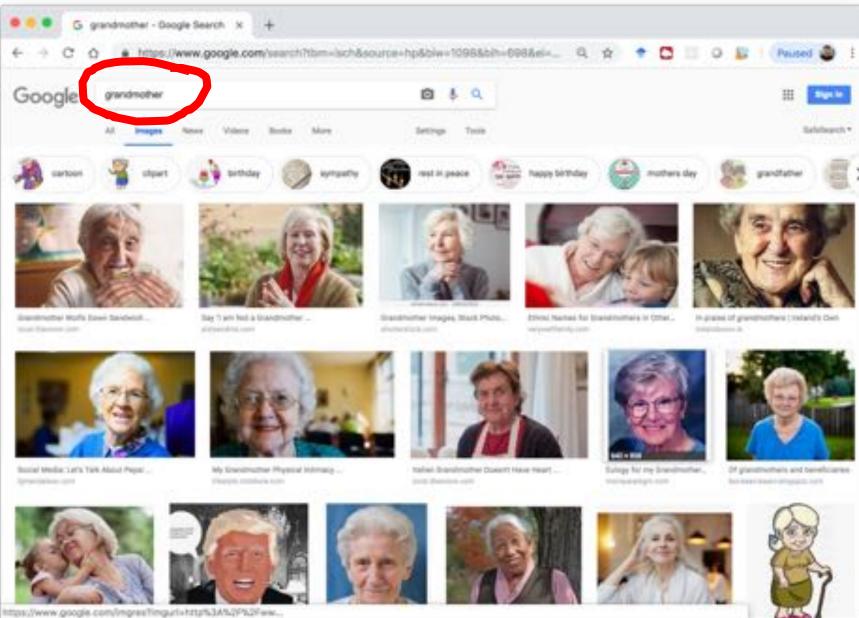

Much more to Ethics + Al

Open Problems


One Shot Learning

Single training example:




a 秒 気気 Test set: 型 3 世 き お え う ド カ え

Bayesian Program Learning

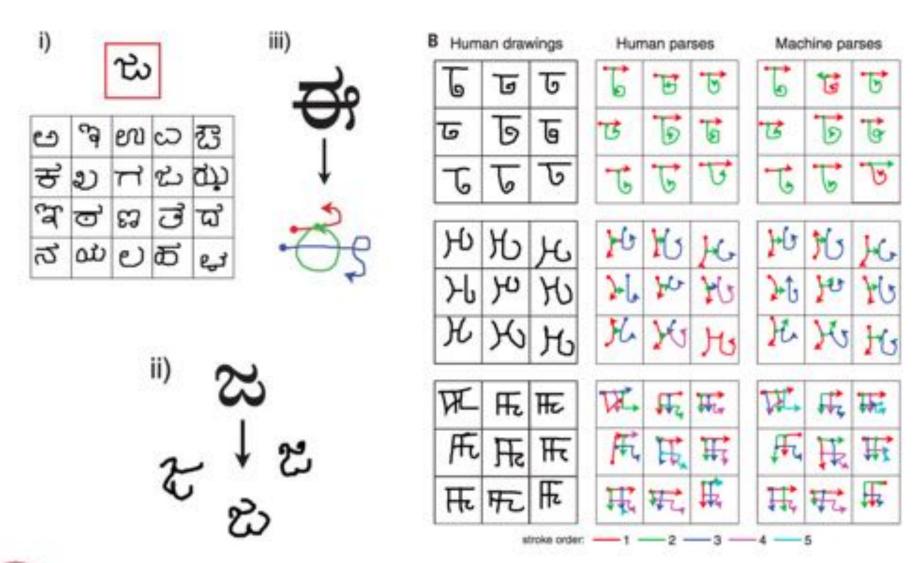




Bayesian Program Learning

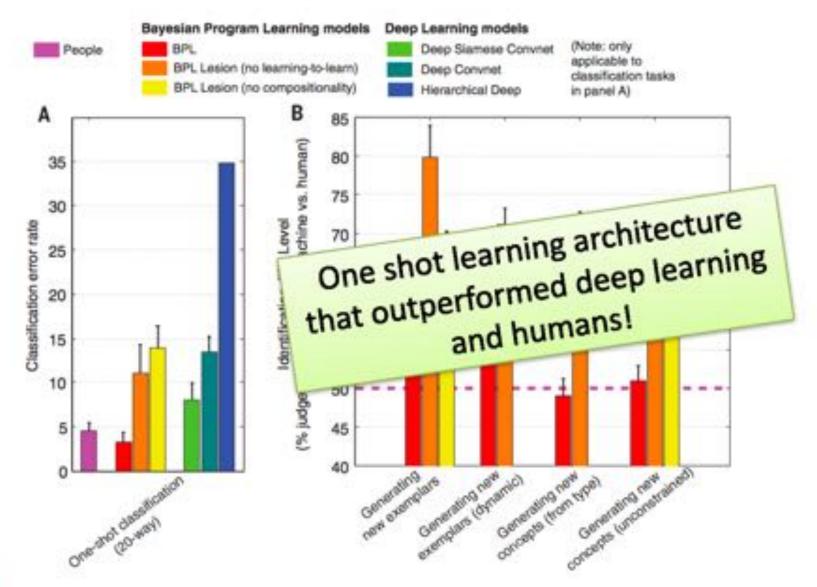




Transfer Learning

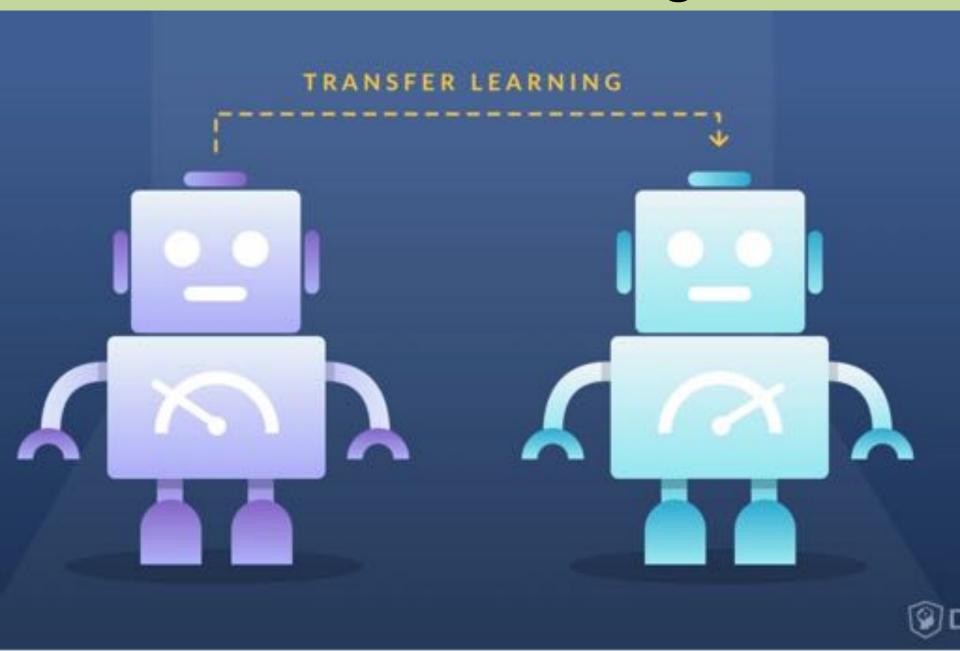


Neural Network Structure?




Neural Turing Machines

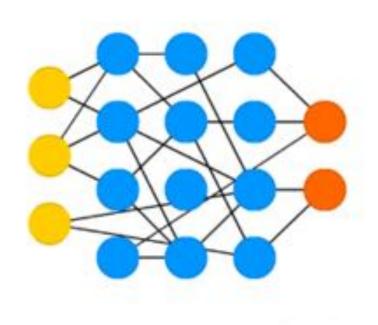


Neural Turing Machine (NTM)

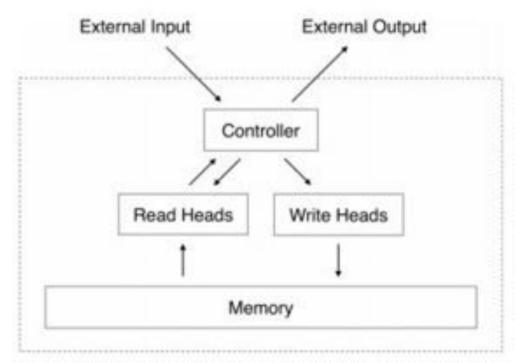

Theoretical Deep Learning

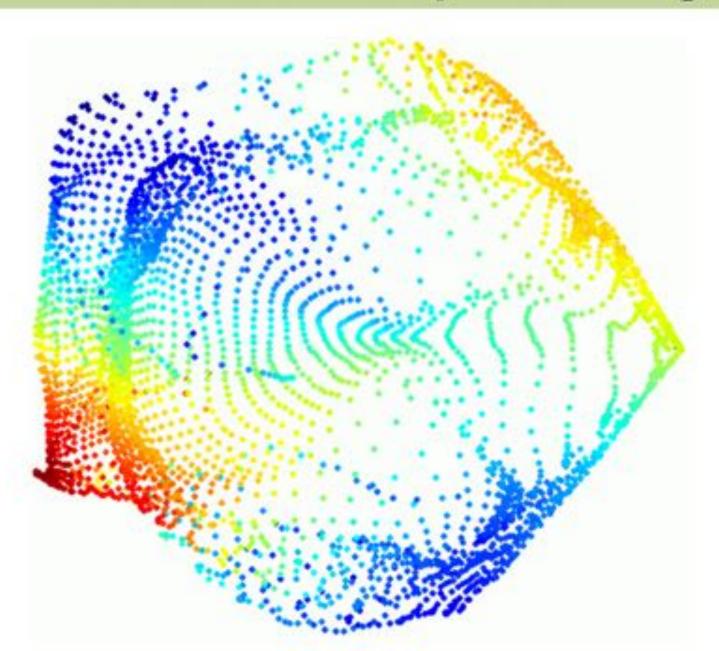

Sampling + Deep Learning!

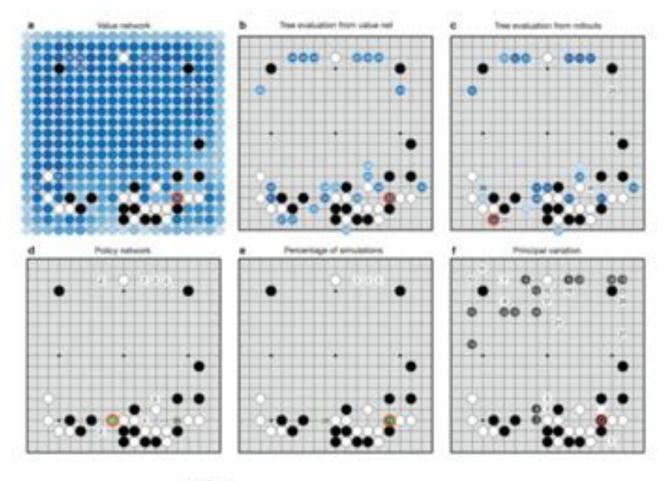




Natural Language



Al for Medicine

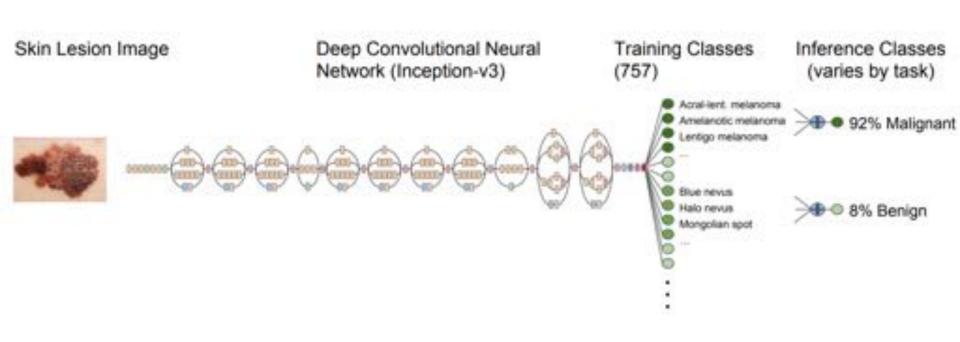


Esteva, Andre, et al. "Dermatologist-level classifications skin cancer with deep neural networks." *Nature* 542.7630 (2017): 115-118.

Climate Change?



Climate Change?

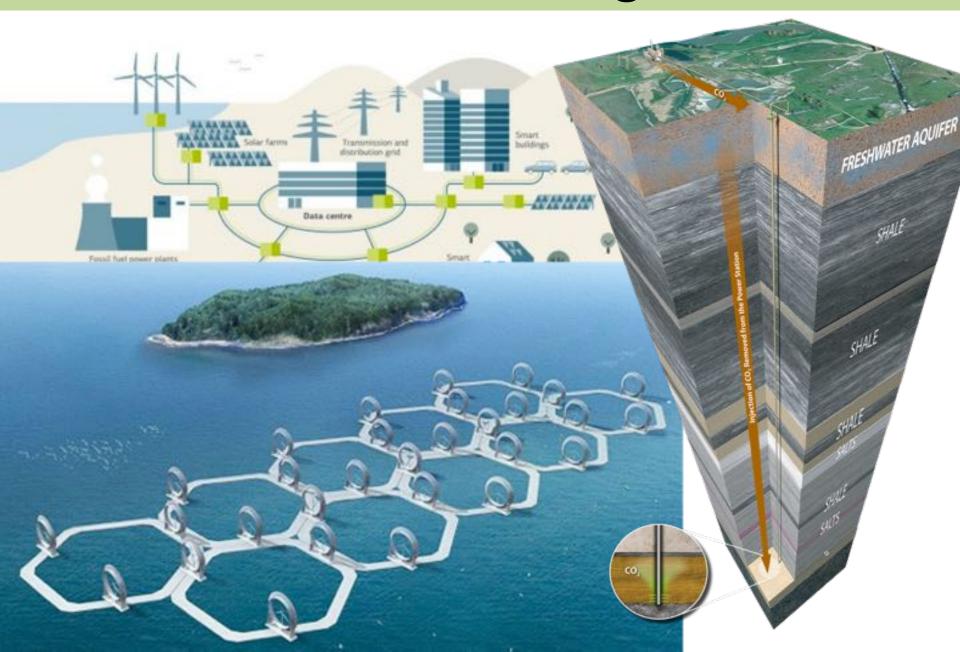

Honorable Mentions Differential Privacy Fairness and Al General Al Better Optimization DeepLearning + X Self Driving Cars **Understanding Video**

After CS109

Theory

CS161 – Algorithmic analysis

Stats 217- Stochastic Processes

CS 238 – Decision Making Under Uncertainty

CS 228 - Probabilistic Graphical Models

AI

CS 221 – Intro to AI

CS 229 - Macine Learning

CS 230 - Deep Learning

CS 224N - Natural Language Processing

CS 234 – Reinforcement Learning

Applications

CS 279 - Bio Computation

Literally any class with numbers in it

Technology magnifies. What do we want magnified?

Why Study Probability + CS?

Interdisciplinary




Closest Thing To Magic



Now is the Time



Oh and Its Useful

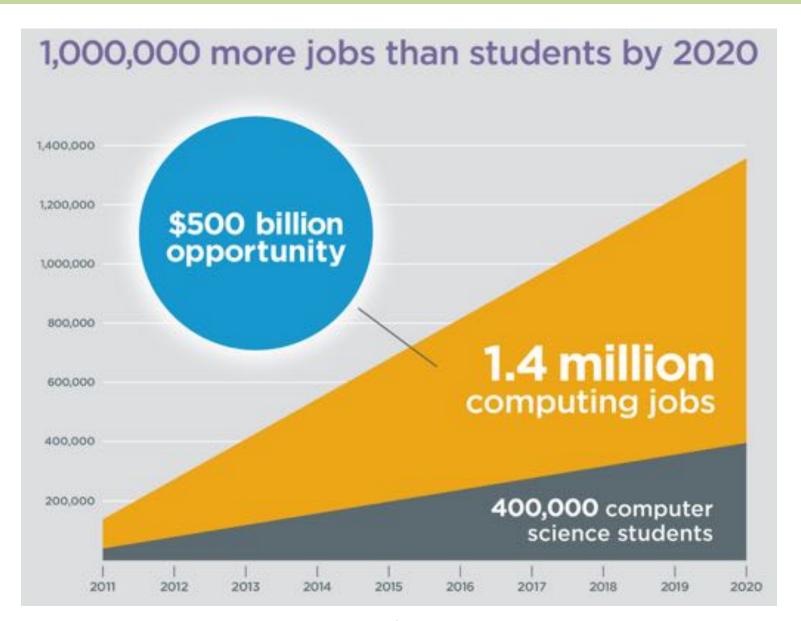

Code.org

Everyone is Welcome



I guarantee the techniques will change...

You are close to the edge of human knowledge

(all of you)



The End