

# CS111, Lecture 19

## Preemption and Implementing Locks




masks recommended

This document is copyright (C) Stanford Computer Science and Nick Troccoli, licensed under Creative Commons Attribution 2.5 License. All rights reserved.  
Based on slides and notes created by John Ousterhout, Jerry Cain, Chris Gregg, and others.  
NOTICE RE UPLOADING TO WEBSITES: This content is protected and may not be shared, uploaded, or distributed. (without expressed written permission)

# CS111 Topic 3: Multithreading, Part 2

**Multithreading** - *How can we have concurrency within a single process? How does the operating system support this?*

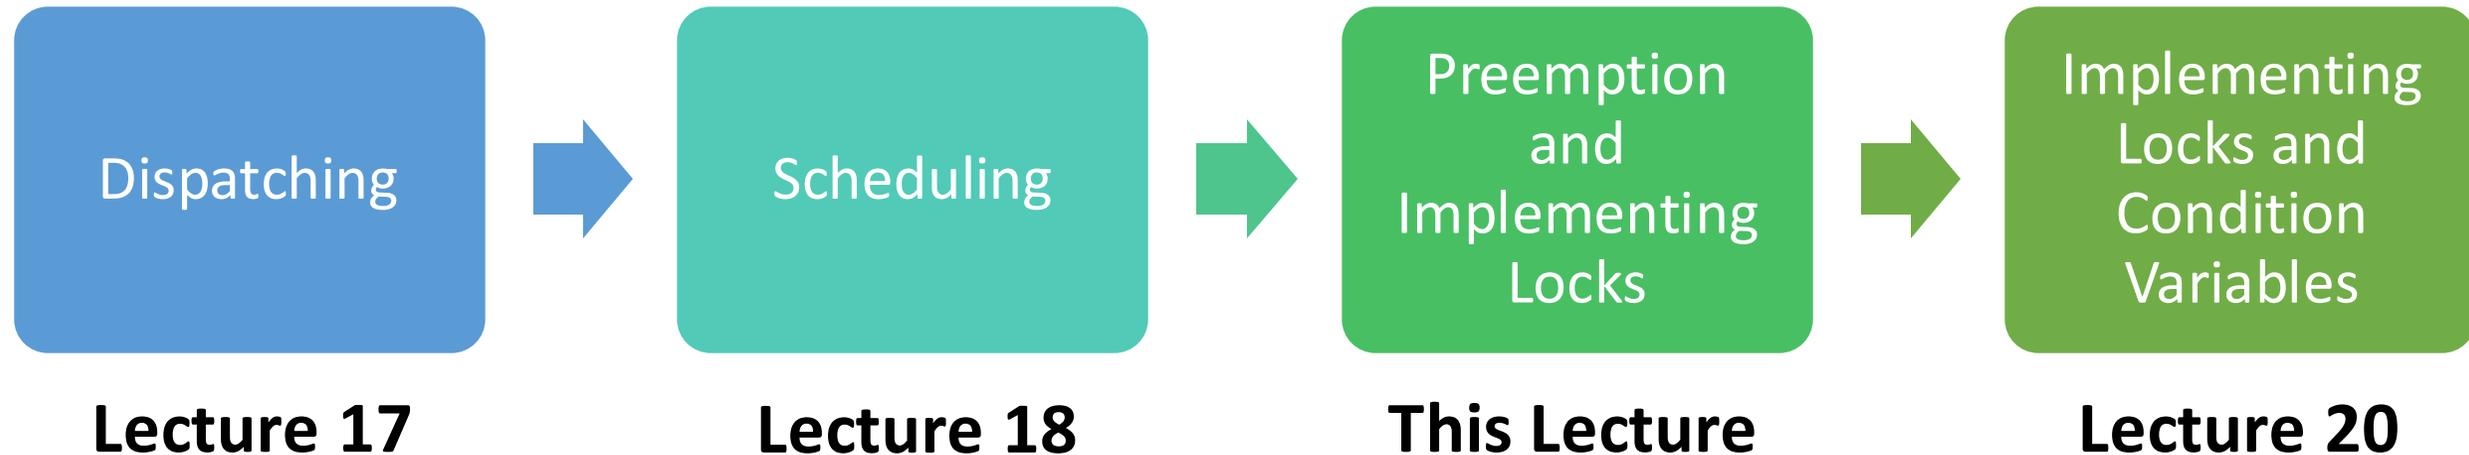

**assign5:** implement your own version of **thread**, **mutex** and **condition\_variable**!

# Learning Goals

- Learn about the assign5 infrastructure and how to implement a dispatcher/scheduler with *preemption*
- Understand more about how interrupts work and how they can cause race conditions
- Use our understanding of threads and interrupts to implement locks

# Plan For Today

- **Recap:** Scheduling
- Preemption and Interrupts
- Implementing Locks

```
cp -r /afs/ir/class/cs111/lecture-code/lect19 .
```

# Plan For Today

- **Recap: Scheduling**
- Preemption and Interrupts
- Implementing Locks

```
cp -r /afs/ir/class/cs111/lecture-code/lect19 .
```

# Scheduling

**Key Question:** How does the operating system decide which thread to run next? (e.g. many **ready** threads). Assume just 1 core.

We discussed 4 main designs:

- 1. First-come-first-serve (FIFO / FCFS):** keep threads in ready queue, add threads to the back, run thread from front until completion or blocking.
- 2. Round Robin:** run thread for one time slice, then add to back of queue if wants more time
- 3. Shortest Remaining Processing Time (SRPT):** pick the thread that will complete or block the soonest and run it to completion.
- 4. Priority-Based Scheduling:** threads have priorities, and we have one ready queue per priority. Threads adjust priorities based on time slice usage, or based on recent CPU usage (4.4 BSD Unix)

# Shortest Remaining Processing Time

**SRPT:** pick the thread that will finish the most quickly and run it to completion. This is the optimal solution for minimizing average response time.

What are some problems/challenges with the SRPT approach?

**Problem #1:** how do we know which one will finish most quickly? (we must be able to predict the future...)

**Problem #2:** if we have many short-running threads and one long-running one, the long one will not get to run

# SRPT

Another advantage of SRPT: improves overall resource utilization

- If a thread is **I/O-Bound** – e.g. constantly reading from disk (frequently waits for disk), it will get priority vs. thread that needs lots of CPU time – **CPU Bound**.
  - “I/O-Bound” - the time to complete them is dictated by how long it takes for some external mechanism to complete its work (disk, network)
  - “CPU-Bound” - the time to complete them is dictated by how long it takes us to do the CPU computation
  - E.g. with I/O-bound thread wanting 1ms before reading from disk vs. CPU-bound thread wanting 100ms, we will run I/O bound thread first.

Gives preference to those who need the least.

# Plan For Today

- Recap: Scheduling
- **Preemption and Interrupts**
- Implementing Locks

```
cp -r /afs/ir/class/cs111/lecture-code/lect19 .
```

# Preemption and Interrupts

On assign5, you'll implement a **combined scheduler+dispatcher** using the Round Robin approach.

- *Preemptive*: threads can be kicked off in favor of others (after time slice)

To implement this, we've provided a timer implementation that lets you run code every X microseconds.

- Fires a timer interrupt at specified interval

**Idea:** we can use the timer handler to trigger a context switch!

# Timer Demo

```
// this program runs timer_interrupt_handler every 0.5 seconds
```

```
void timer_interrupt_handler() {  
    cout << "Timer interrupt occurred!" << endl;  
}
```

```
int main(int argc, char *argv[]) {  
    // specify microsecond interval and function to call  
    timer_init(500000, timer_interrupt_handler);  
    while (true) {}  
}
```



# Timer and Interrupts

We can use the timer to trigger a context switch!

- For simplicity, on assign5 we'll always do a context switch when the timer fires (e.g. even if a thread finished early, and another started early, we still switch every X ms)
- **Want to avoid:** what if the timer goes off while we are handling the timer going off?
- **Key detail:** the timer disables interrupts when running your timer handler, to avoid the timer interrupting itself. Interrupts are re-enabled once the handler finishes. (“do not disturb”)
- Interrupt disabling is **global** state (not per thread), cannot be done by user programs.

# Timer Demo

```
// this program runs timer_interrupt_handler every 0.5 seconds
```

**Interrupts globally**

```
void timer_interrupt_handler() {  
    cout << "Timer interrupt occurred!" << endl;
```

**disabled at start**

```
}
```

**Interrupts globally re-enabled after**

```
int main(int argc, char *argv[]) {  
    // specify microsecond interval and function to call  
    timer_init(500000, timer_interrupt_handler);  
    while (true) {}  
}
```



**interrupt.cc**

# Approximate timer.cc Code

```
void timer_interrupt() {
    if (!enabled_flag) {
        // defers timer alarm until later
        interrupted = 1;
        return;
    }

    intr_enable(false);
    timer_handler(); // calls our timer handler
    intr_enable(true);
}
```

# Timer and Interrupts

We can use the timer to trigger a context switch! Let's see what this looks like.



[context-switch-preemption-buggy.cc](#) (and non-buggy version)

# Enabling/Disabling Interrupts

If we are switching between two already-running threads, interrupts will always be properly enabled and disabled. “Interrupt handshake”. Let’s see how!

(Note: assumption we are running on a single-core system, and we’ll focus on switching between already-running threads for now).

# Enabling/Disabling Interrupts

Interrupts  
ON

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

Timer! 

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
ON

## Thread #1

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
ON

## Thread #1

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

Timer! 

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}  
  
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
ON

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
ON

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

What about when a thread runs for the first time? Will interrupts be enabled?

**Key note:** new threads start running at the start of their function, not the timer handler.

# Will interrupts be enabled when Thread #2 first runs?

Interrupts  
ON

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

**Respond on PollEv:** [pollev.com/cs111](http://pollev.com/cs111)  
or text CS111 to 22333 once to join.



## What will the interrupt state be when thread #2 first runs?

enabled: this is good so that we can switch to another thread later

0%

enabled: this is bad because the thread could be switched off soon after it starts running

0%

disabled: this is good so that the thread has time to run

0%

disabled: this is bad because the thread can never be interrupted

0%

# Enabling/Disabling Interrupts

Interrupts  
ON

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

Timer! 

## Thread #2

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
int main(int argc, char *argv[]) {  
    ...  
    while (true) {  
        cout << "I am the main thread"  
              << endl;  
    }  
}
```

## Thread #2 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
void other_func() {  
    while (true) {  
        cout << "Other thread here!  
Hello." << endl;  
    }  
}
```

**Problem:** when we start executing another thread for the first time, it won't re-enable interrupts, so the timer won't be heard anymore!

# Enabling/Disabling Interrupts

Interrupts  
OFF

## Thread #1 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
int main(int argc, char *argv[]) {  
    ...  
    while (true) {
```

## Thread #2 (Running)

```
void timer_interrupt_handler() {  
    ...  
    context_switch(*nonrunning_thread,  
                  *current_thread);  
}
```

```
void other_func() {  
    while (true) {  
        cout << "Other thread here!"
```

**Existing thread:** freeze frame is in timer handler, interrupts automatically re-enabled on exit.

**New thread:** freeze frame is at start of function, no automatic re-enabling of interrupts!

**Demo: context-switch-  
preemption-buggy.cc**

# Enabling Interrupts

**Solution:** manually enable interrupts when a thread is first run.

```
void other_func() {  
    intr_enable(true); // provided func to enable/disable  
    while (true) {  
        cout << "Other thread here! Hello." << endl;  
    }  
}
```

You'll need to do this on assign5 when a thread is first run. *Only necessary for new threads*; if a thread is paused that means when it was previously running, the timer handler was called and it context-switched to another thread.

Therefore, when that thread resumes, **it will resume at the end of the timer handler**, where interrupts are re-enabled.

# Interrupts So Far

- Interrupts can be turned on and off globally
- When the timer fires, it disables interrupts while the timer handler is running, and re-enables them after
- We must make sure that the *new* thread always enables interrupts when it is switched to

# Plan For Today

- Recap: Scheduling
- Preemption and Interrupts
- **Implementing Locks**

```
cp -r /afs/ir/class/cs111/lecture-code/lect19 .
```

# Implementing Locks

Now that we understand how thread dispatching/scheduling works, we can write our own **mutex** implementation! Mutexes need to block threads (functionality the dispatcher / scheduler provides).

What does the design of a lock look like? What state does it need?

- Track whether it is locked / unlocked
- The lock “owner” (if any) – perhaps combine with first bullet
- A list of threads waiting to get this lock

# Implementing Locks

Now that we understand how thread dispatching/scheduling works, we can write our own **mutex** implementation! Mutexes need to block threads (functionality the dispatcher / scheduler provides).

What does the design of a lock look like? What state does it need?

- Track whether it is locked / unlocked
- The lock “owner” (if any) – perhaps combine with first bullet
- A list of threads waiting to get this lock

We can keep a queue of threads (for fairness).

# Lock

1. If this lock is unlocked, mark it as locked by the current thread
2. Otherwise, add the current thread to the back of the waiting queue

```
// Instance variables
int locked = 0;
ThreadQueue q; // blocked threads, not ready threads

void Lock::lock() {
    if (!locked) {
        locked = 1;
    } else {
        q.add(currentThread);
        blockThread(); // block/switch to next ready thread
    }
}
```

# Unlock

1. If no-one is waiting for this lock, mark it as unlocked
2. Otherwise, keep it locked, but unblock the next waiting thread

```
// Instance variables
```

```
int locked = 0;
```

```
ThreadQueue q;
```

```
void Lock::unlock() {
```

```
    if (q.empty()) {
```

```
        locked = 0;
```

```
    } else {
```

```
        unblockThread(q.remove()); // add to ready queue
```

```
    }
```

```
}
```

# Unlock

1. If no-one is waiting for this lock, mark it as unlocked
2. Otherwise, keep it locked, but unblock the next waiting thread

```
// Instance variables
```

```
int locked = 0;  
ThreadQueue q;
```

```
void Lock::unlock() {  
    if (q.empty()) {  
        locked = 0;  
    } else {  
        unblockThread(q.remove()); // add to ready queue  
    }  
}
```

Mutex remains locked. And new owner may not run immediately!

# Implementing Locks

With our understanding of threads and how they are run and switched between, we can understand how a mutex works – cool!

**Question:** could race conditions occur in our mutex implementation?

**Yes.** We can be interrupted at any time to switch to another thread.

We can have race conditions *within the thing that helps us prevent race conditions?* How are we supposed to fix *that?*

- We can't use a mutex, because we're writing the code to implement it!

More next time...

# Recap

- Recap: Scheduling
- Preemption and Interrupts
- Implementing Locks

**Lecture 19 takeaway:** To implement preemption and locks, we must make sure to correctly enable and disable interrupts. Locks consist of a waiting queue and context switching to make threads sleep.

**Next time:** More about mutex and condition variable implementations