

CS276B

Text Information Retrieval, Mining, and
Exploitation


Lecture 6

Information Extraction I


Jan 28, 2003

(includes slides borrowed from Oren Etzioni, Andrew
McCallum, Nick Kushmerick, BBN, and Ray Mooney)

Information Food Chain II

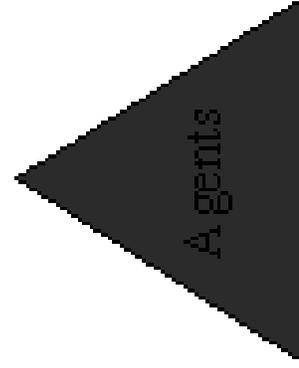

Personal
Assistants

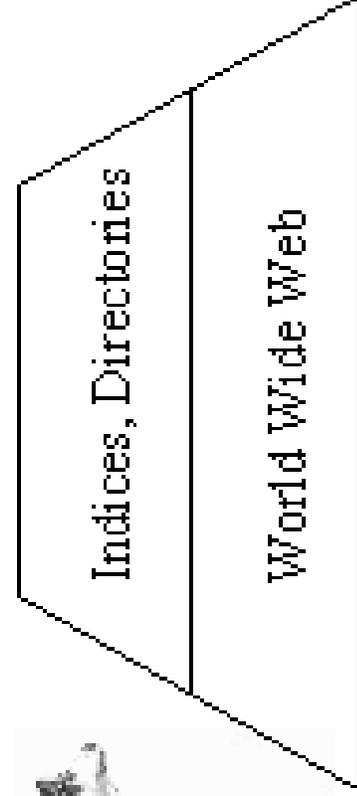

Mass
Services

Product information

CNET.com - Shopping - Search Results for "ibm x21" - Microsoft Internet Explorer

Address: ,0-1257,00.html?tag=&qt=ibm+x21&cn=&ca=1257


Found: 12 Displaying: 1-12

Resort by				
Most Popular	Product Name	Manufacturer Name	CNET Review	Lowest Price
	256MB PC100 IBM THINKPAD A20M A21 A22 X21 X20 T21 T22 390X 600X Add to my list	Crucial Technology		Check Latest Prices ▶ Price range: \$83.20-\$141.95
	THINKPAD X21 P3-700 20GB 128MB W2K 12-SVGA ENET INTEL 56K Add to my list	IBM Corp.	product info	Check Latest Prices ▶ Price range: \$1899.00-\$2923.36
	IBM Thinkpad X21 (Pentium III, 700 MHz, 128 MB, 20 GB) Add to my list	IBM Corp.	product info	Check Latest Prices ▶ Price range: \$2489.00-\$2996.47
	THINKPAD X21 P3-700 20GB 128MB 98 12-XGA ENET INTEL 56K Add to my list	IBM Corp.	product info	Check Latest Prices ▶ Price range: \$2048.95-\$2818.91
	IBM ThinkPad X21 (Pentium III 700MHz, 128MB RAM, 20GB) Add to my list	IBM Corp.	review 	Check Latest Prices ▶ Price range: \$2339.00-\$2818.91
	TP X21 NB P3/700 128MB 20GB 12.1 56K ETH W2K Add to my list	IBM Corp.	product info	Check Latest Prices ▶ Price range: \$2420.39-\$2925.21
	IBM ThinkPad X21 (Pentium III, 700 MHz, 128 MB, 20 GB) Add to my list	IBM Corp.	product info	Check Latest Prices ▶ Price range: \$2322.00-\$2892.02
	THINKPAD X21 P3-700 20GB 128MB 98 12 SVGA ENET	IBM Corp.		Check Latest Prices ▶ Price range: \$2378.96-\$2818.91

Done Internet

Product info

- CNET markets this information
- How do they get most of it?
 - Phone calls
 - Typing.

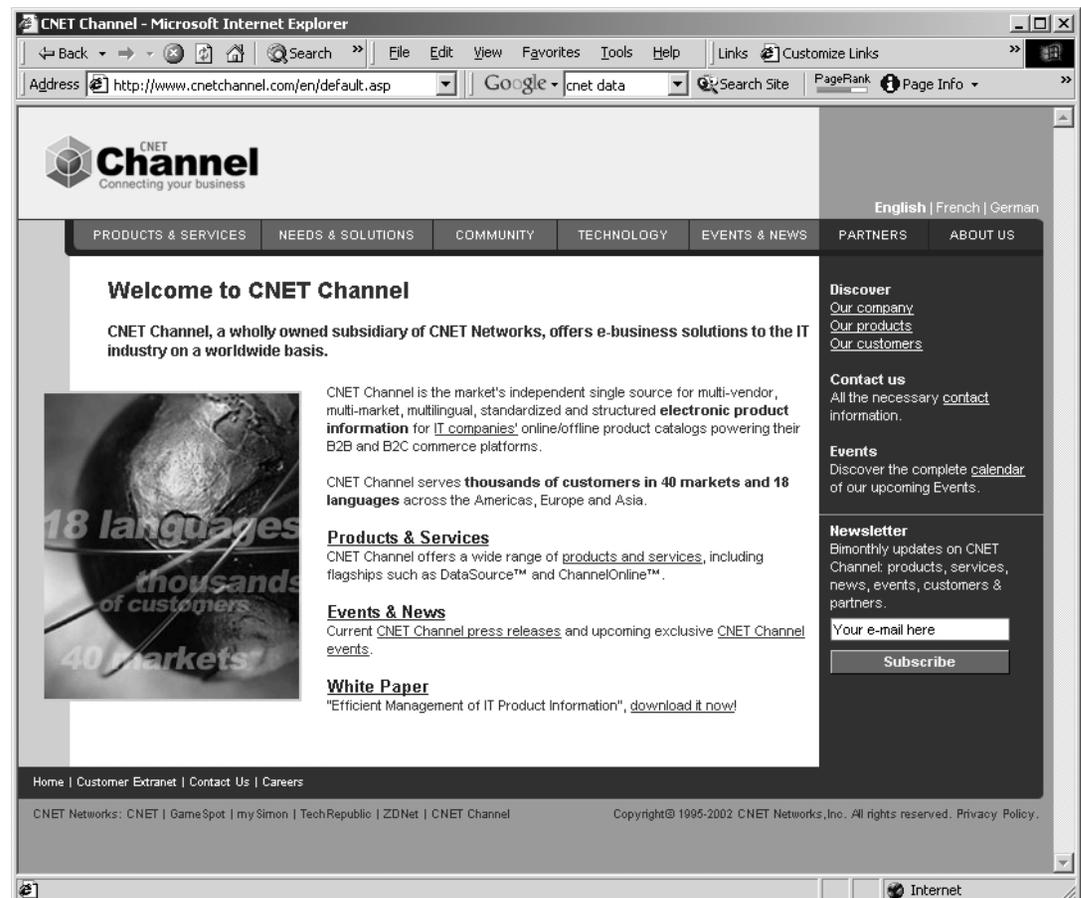

It's difficult because of textual inconsistency: digital cameras

- Image Capture Device: 1.68 million pixel 1/2-inch CCD sensor
- Image Capture Device Total Pixels Approx. 3.34 million Effective Pixels Approx. 3.24 million
- Image sensor Total Pixels: Approx. 2.11 million-pixel
- Imaging sensor Total Pixels: Approx. 2.11 million 1,688 (H) x 1,248 (V)
- CCD Total Pixels: Approx. 3,340,000 (2,140[H] x 1,560 [V])
 - Effective Pixels: Approx. 3,240,000 (2,088 [H] x 1,550 [V])
 - Recording Pixels: Approx. 3,145,000 (2,048 [H] x 1,536 [V])
- *These all came off the same manufacturer's website!!*
- And this is a very technical domain. Try sofa beds.



Classified Advertisements (Real Estate)

Background:

- Advertisements are plain text
- Lowest common denominator: only thing that 70+ newspapers with 20+ publishing systems can all handle

```
<ADNUM>2067206v1</ADNUM>
<DATE>March 02, 1998</DATE>
<ADTITLE>MADDINGTON
    $89,000</ADTITLE>
<ADTEXT>
OPEN 1.00 - 1.45<BR>
U 11 / 10 BERTRAM ST<BR>
NEW TO MARKET Beautiful<BR>
3 brm freestanding<BR>
villa, close to shops & bus<BR>
Owner moved to Melbourne<BR>
ideally suit 1st home
    buyer,<BR>
investor & 55 and over.<BR>
Brian Hazelden 0418 958 996<BR>
R WHITE LEEMING 9332 3477
</ADTEXT>
```

PROPERTYMAP

news real estate

--Please Choose--

- [New Search](#)
- [Return to Listing](#)
- [Guided Tour](#)

MEMBER LOGIN

Username

Password

ENTER

Press to fill in an Online Application


Use Navigation Aids to change chosen area

ZOOM IN

ZOOM OUT

UBD Reference:

"332 D10"

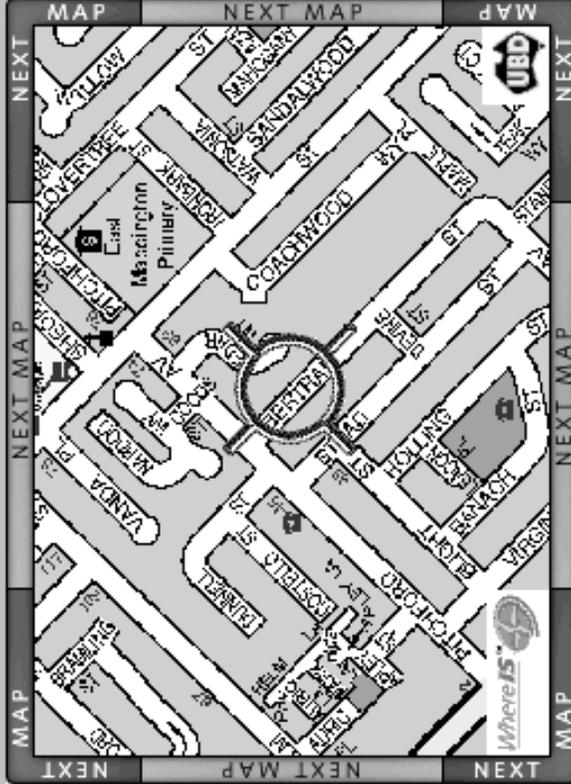


The Exact location was successfully mapped [0]

[Add to Inspection List](#) [Show More Detail](#)

Property Details

Address: 10 BERTRAM ST
Suburb: MADDINGTON
State: WA

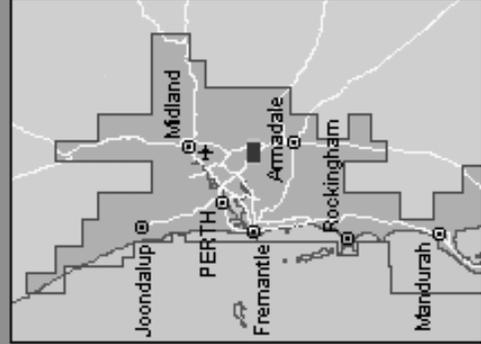

Why doesn't text search (IR) work?

What you search for in real estate advertisements:

- Suburbs. You might think easy, but:
 - Real estate agents: Coldwell Banker, Mosman
 - Phrases: Only 45 minutes from Parramatta
 - Multiple property ads have different suburbs
- Money: want a range not a textual match
 - Multiple amounts: was \$155K, now \$145K
 - Variations: offers in the high 700s [*but not* rents for \$270]
- Bedrooms: similar issues (br, bdr, beds, B/R)

Extracting Job Openings from the Web

foodscience.com-Job2

JobTitle: Ice Cream Guru

Employer: foodscience.com

JobCategory: Travel/Hospitality

JobFunction: Food Services

JobLocation: Upper Midwest

Contact Phone: 800-488-2611

DateExtracted: January 8, 2001

Source: www.foodscience.com/jobs_midwest.htm

OtherCompanyJobs: foodscience.com-Job1

Ice Cream Guru

If you dream of cold, creamy chocolate or gooey, gooey cookie, there's a great opportunity for you to maintain and expand this major corporation's high-end ice cream brand. Will be based in the Upper Midwest for about a year. After that, California here I come! Requires a BS in Food Science or dairy, plus ice cream formulation experience. Will consider entry level with an MS and an internship.

Contact Susan: e-mail
1-800-488-2611



Job Search at FlipDog.com: Employment & Career Management

Home Find Jobs Your Account Resource Center Support Employers



647,514
Job Opportunities
from **53,641** Employers

► **Find a Job!**

► **Post Your Resume**

► **Employers**
click here for
Products & Services

Job Seekers: Find your dream job!

- Check our 'Best Places to Find a Job' January report.
- Open your **FREE** account and put your **resume online**.
- Search 24x7 with our **FREE** automatic **JobHunters™**.
- Research our database of over **50,000** employers.
- Get **expert advice** at our new **Resource Center**.
- Access salary surveys/calculators, relocation tools, networking opportunities, & training/testing tools.
- Use FlipDog.com to search jobs right from your desktop! Download **Shippets™** today!

Pigskin Places

Health Care in NY	2,770
Health Care in MD	1,262
Sales in NY	3,751
Sales in MD	958
Computing in NY	8,050
Computing in MD	4,114

Jobs for Sports Fans

- [Head Football Coach](#)
- [Football Coach](#)
- [Asst. Football Coach](#)
- [High School Football Coach](#)
- [Univ. Asst. Football Coach](#)

Job Seeker Newsletter

Enter your e-mail address:

[Sign Me Up!](#)



"Top 100 Web Sites"
PC Magazine, Nov. 2000



"Top 10 Career Web Site"
Media Metrix, Sept. 2000



"Top 10 Job Site"

Showcase Jobs



We provide total staffing solutions in the areas of Human Resources, Compensation, Web-based HR, self-service, and Customer and Management Systems.

[Learn More](#)




Looking for a Vice President of Academic Affairs to oversee planning, operation and evaluation of the college's academic programs.

[Learn More](#)

powered by
WhizBang!

Knowledge Extraction Vision

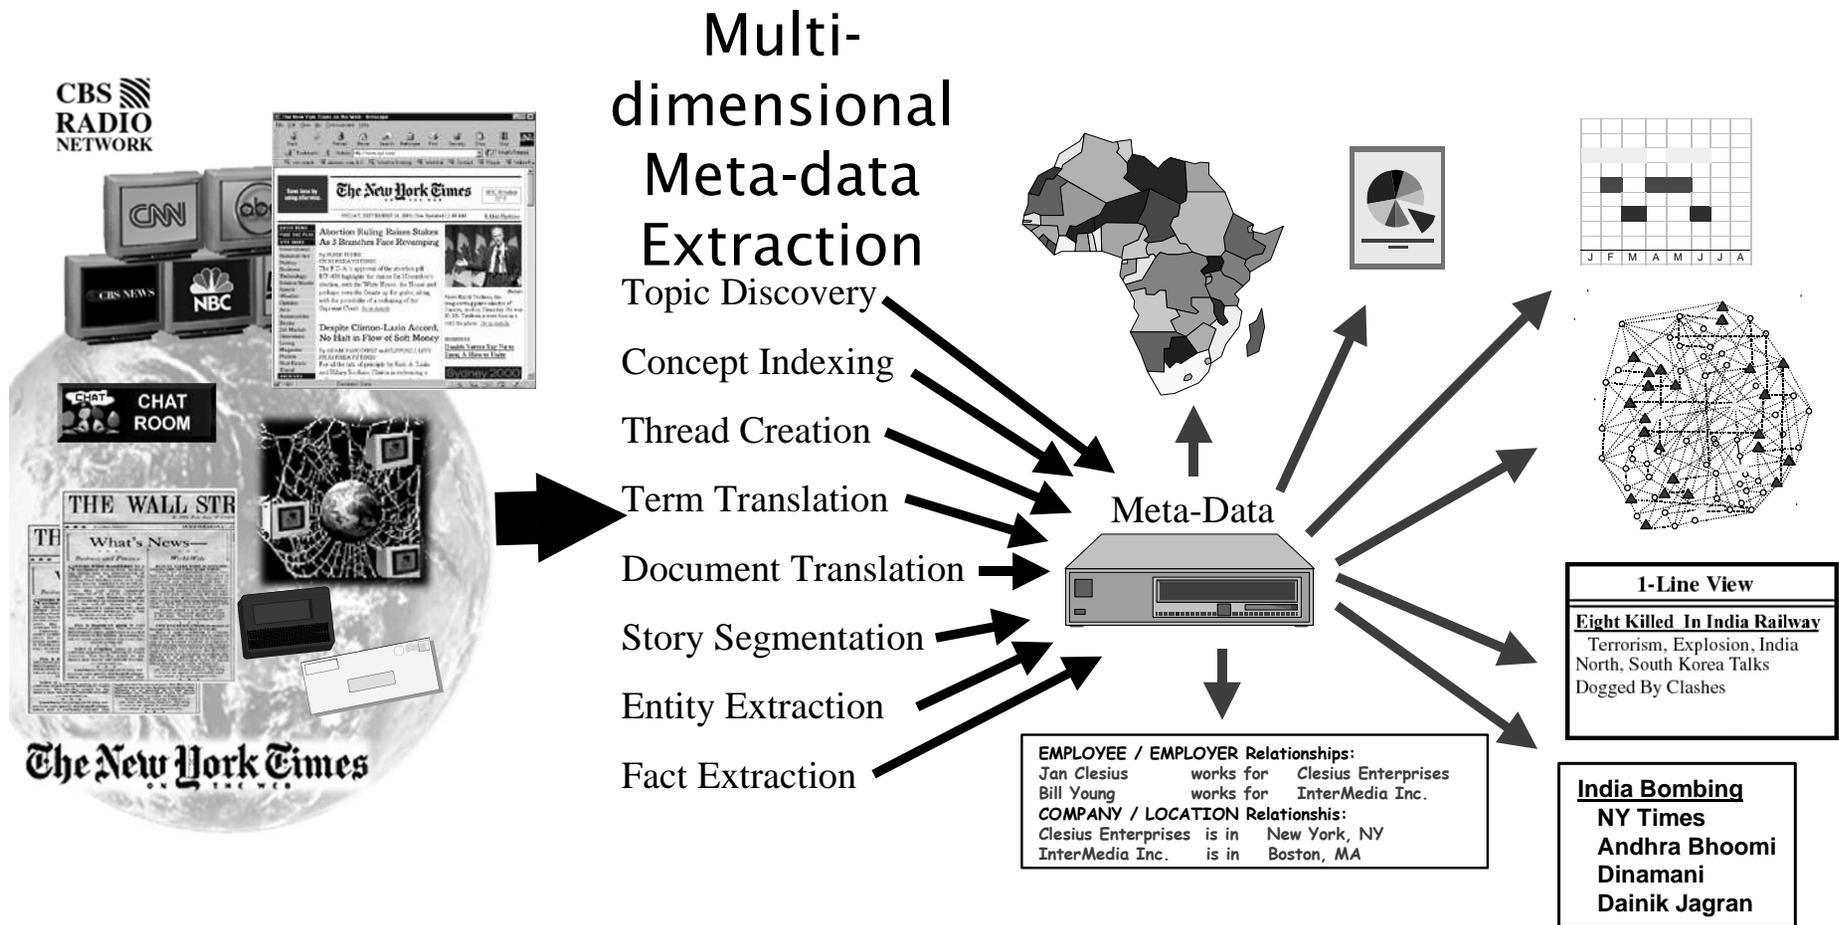

Task: Information Extraction

- Goal: being able to answer semantic queries (a.k.a. “database queries”) using “unstructured” natural language sources
- Identify specific pieces of information in a unstructured or semi-structured textual document.
- Transform this unstructured information into structured relations in a database/ontology.

Suppositions:

- A lot of information that *could* be represented in a structured semantically clear format isn't
- It may be costly, not desired, or not in one's control (screen scraping) to change this.

Other applications of IE Systems

- Job resumes: BurningGlass, Mohomine
- Seminar announcements
- Continuing education courses info from the web
- Molecular biology information from MEDLINE, e.g.,
Extracting gene drug interactions from biomed texts
- Summarizing medical patient records by extracting
diagnoses, symptoms, physical findings, test results.
- Gathering earnings, profits, board members, etc.
[corporate information] from web, company reports
- Verification of construction industry specifications
documents (are the quantities correct/reasonable?)
- Extraction of political/economic/business changes
from newspaper articles

What about XML?

- Don't XML, RDF, OIL, SHOE, DAML, XSchema, ... obviate the need for information extraction?!??!
- Yes:
 - IE is sometimes used to “reverse engineer” HTML database interfaces; extraction would be much simpler if XML were exported instead of HTML.
 - Ontology-aware editors will make it easier to enrich content with metadata.
- No:
 - Terabytes of legacy HTML.
 - Data consumers forced to accept ontological decisions of data providers (eg, `<NAME>John Smith</NAME>` vs. `<NAME first="John" last="Smith"/>`).
 - Will you annotate every email you send? Every memo you write? Every photograph you scan?

Task: Wrapper Induction

- Wrapper Induction
 - Sometimes, the relations are structural.
 - Web pages generated by a database.
 - Tables, lists, etc.
 - Wrapper induction is usually regular relations which can be expressed by the *structure* of the document:
 - the item in bold in the 3rd column of the table is the price
- Handcoding a wrapper in Perl isn't very viable
 - sites are numerous, and their surface structure mutates rapidly (around 10% failures each month)
- Wrapper induction techniques can also learn:
 - If there is a page about a research project X and there is a link near the word 'people' to a page that is about a person Y then Y is a member of the project X.
 - [e.g, Tom Mitchell's Web->KB project]

Amazon Book Description

....
</td></tr>
</table>
<b class="sans">The Age of Spiritual Machines : When Computers Exceed Human Intelligence

by <a href="/exec/obidos/search-handle-url/index=books&field-author=
Kurzweil%2C%20Ray/002-6235079-4593641">
Ray Kurzweil

List Price: \$14.95

Our Price: \$11.96

You Save: \$2.99
(20%)

<p>
...

Extracted Book Template

Title: The Age of Spiritual Machines :
When Computers Exceed Human Intelligence

Author: Ray Kurzweil

List-Price: \$14.95

Price: \$11.96

:
:

Template Types

- Slots in template typically filled by a substring from the document.
- Some slots may have a fixed set of pre-specified possible fillers that may not occur in the text itself.
 - Terrorist act: threatened, attempted, accomplished.
 - Job type: clerical, service, custodial, etc.
 - Company type: SEC code
- Some slots may allow multiple fillers.
 - Programming language
- Some domains may allow multiple extracted templates per document.
 - Multiple apartment listings in one ad

Wrappers:

Simple Extraction Patterns

- Specify an item to extract for a slot using a regular expression pattern.
 - Price pattern: “\b\\$\d+(\.\d{2})?\b”
- May require preceding (pre-filler) pattern to identify proper context.
 - Amazon list price:
 - Pre-filler pattern: “List Price: ”
 - Filler pattern: “\\$\d+(\.\d{2})?\b”
- May require succeeding (post-filler) pattern to identify the end of the filler.
 - Amazon list price:
 - Pre-filler pattern: “List Price: ”
 - Filler pattern: “.+”
 - Post-filler pattern: “”

Simple Template Extraction

- Extract slots in order, starting the search for the filler of the $n+1$ slot where the filler for the n th slot ended. Assumes slots always in a fixed order.
 - Title
 - Author
 - List price
 - ...
- Make patterns specific enough to identify each filler always starting from the beginning of the document.

Pre-Specified Filler Extraction

- If a slot has a fixed set of pre-specified possible fillers, text categorization can be used to fill the slot.
 - Job category
 - Company type
- Treat each of the possible values of the slot as a category, and classify the entire document to determine the correct filler.

Wrapper tool-kits

- Wrapper toolkits: Specialized programming environments for writing & debugging wrappers by hand
- Examples
 - World Wide Web Wrapper Factory (W4F)
[*db.cis.upenn.edu/W4F*]
 - Java Extraction & Dissemination of Information (JEDI)
[*www.darmstadt.gmd.de/oasys/projects/jedi*]
 - Jungle Corporation

Wrapper induction

Highly regular
source documents



Relatively simple
extraction patterns




Efficient
learning algorithm

- Writing accurate patterns for each slot for each domain (e.g. each web site) requires laborious software engineering.
- Alternative is to use machine learning:
 - Build a training set of documents paired with human-produced filled extraction templates.
 - Learn extraction patterns for each slot using an appropriate machine learning algorithm.

Wrapper induction: Delimiter-based extraction



```
<HTML><TITLE>Some Country Codes</TITLE>  
<B>Congo</B> <I>242</I><BR>  
<B>Egypt</B> <I>20</I><BR>  
<B>Belize</B> <I>501</I><BR>  
<B>Spain</B> <I>34</I><BR>  
</BODY></HTML>
```



Use ****, ****, **<I>**, **</I>** for extraction

Learning LR wrappers

labeled pages

wrapper

```
<HTML><HEAD>Some Country Codes</HEAD>
<HTML><HEAD>Some Country Codes</HEAD>
<HTML><HEAD>Some Country Codes</HEAD>
<HTML><HEAD>Some Country Codes</HEAD>
<B>Congo</B> <I>242</I><BR>
<B>Egypt</B> <I>20</I><BR>
<B>Belize</B> <I>501</I><BR>
<B>Spain</B> <I>34</I><BR>
</BODY></HTML>
```

→ $\langle l_1, r_1, \dots, l_K, r_K \rangle$

Example: Find 4 strings

$\langle \langle \text{B} \rangle, \langle \text{/B} \rangle, \langle \text{l} \rangle, \langle \text{/l} \rangle \rangle$

$\langle l_1, r_1, l_2, r_2 \rangle$

LR: Finding r_1

```
<HTML><TITLE>Some Country Codes</TITLE>  
<B>Congo</B> <I>242</I><BR>  
<B>Egypt</B> <I>20</I><BR>  
<B>Belize</B> <I>501</I><BR>  
<B>Spain</B> <I>34</I><BR>  
</BODY></HTML>
```

r_1 can be any *prefix*
eg

LR: Finding l_1 , l_2 and r_2

```
<HTML><TITLE>Some Country Codes</TITLE>  
<B>Congo</B> <I>242</I><BR>  
<B>Egypt</B> <I>20</I><BR>  
<B>Belize</B> <I>501</I><BR>  
<B>Spain</B> <I>34</I><BR>  
</BODY></HTML>
```

r_2 can be any *prefix*
eg <I>


l_2 can be any *suffix*
eg <I>

l_1 can be any *suffix*
eg

A problem with LR wrappers

Distracting text in head and tail

```
<HTML><TITLE>Some Country Codes</TITLE>  
<BODY><B>Some Country Codes</B><P>  
<B>Congo</B> <I>242</I><BR>  
<B>Egypt</B> <I>20</I><BR>  
<B>Belize</B> <I>501 </I><BR>  
<B>Spain</B> <I>34</I><BR>  
<HR><B>End</B></BODY></HTML>
```

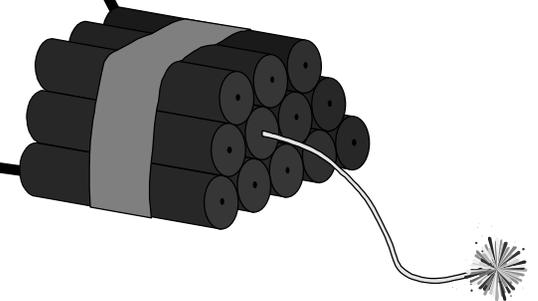

One (of many) solutions: HLRT

Ignore page's head and tail

```
<HTML><TITLE>Some Country Codes</TITLE>  
<BODY><B>Some Country Codes</B><P>  
<B>Congo</B> <I>242</I><BR>  
<B>Egypt</B> <I>20</I><BR>  
<B>Belize</B> <I>501 </I><BR>  
<B>Spain</B> <I>34</I><BR>  
<HR><B>End</B></BODY></HTML>
```

} head

} body

} tail

start of tail

 **H**ead-**L**eft-**R**ight-**T**ail wrappers

More sophisticated wrappers

- LR and HLRT wrappers are extremely simple (though useful for $\sim 2/3$ of real Web sites!)
- Recent wrapper induction research has explored more expressive wrapper classes [Muslea et al, Agents-98; Hsu et al, JIS-98; Kushmerick, AAI-1999; Cohen, AAI-1999; Minton et al, AAI-2000]
 - Disjunctive delimiters
 - Multiple attribute orderings
 - Missing attributes
 - Multiple-valued attributes
 - Hierarchically nested data
 - Wrapper verification and maintenance

Boosted wrapper induction

- Wrapper induction is ideal for rigidly-structured machine-generated HTML...
- ... or is it?!
- Can we use simple patterns to extract from natural language documents?

... **Name:** Dr. Jeffrey D. Hermes ...
... **Who:** Professor Manfred Paul ...
... **will be given by** Dr. R. J. Pangborn ...
... Ms. Scott **will be speaking** ...
... Karen Shriver, **Dept. of** ...
... Maria Klawe, **University of** ...

BWI: The basic idea

- Learn “wrapper-like” patterns for texts
pattern = exact token sequence
- Learn many such “weak” patterns
- Combine with *boosting* to build “strong” ensemble pattern
 - *Boosting* is a popular recent machine learning method where many weak learners are combined
- Demo: www.smi.ucd.ie/bwi
- Not all natural text is sufficiently regular for exact string matching to work well!!

Natural Language Processing

- If extracting from automatically generated web pages, simple regex patterns usually work.
- If extracting from more natural, unstructured, human-written text, some NLP may help.
 - Part-of-speech (POS) tagging
 - Mark each word as a noun, verb, preposition, etc.
 - Syntactic parsing
 - Identify phrases: NP, VP, PP
 - Semantic word categories (e.g. from WordNet)
 - KILL: kill, murder, assassinate, strangle, suffocate
- Extraction patterns can use POS or phrase tags.
 - Crime victim:
 - Prefiller: [POS: V, Hypernym: KILL]
 - Filler: [Phrase: NP]

Three generations of IE systems

- Hand-Built Systems – Knowledge Engineering [1980s–]
 - Rules written by hand
 - Require experts who understand both the systems and the domain
 - Iterative guess-test-tweak-repeat cycle
- Automatic, Trainable Rule-Extraction Systems [1990s–]
 - Rules discovered automatically using predefined templates, using methods like ILP
 - Require huge, labeled corpora (effort is just moved!)
- Statistical Generative Models [1997 –]
 - One decodes the statistical model to find which bits of the text were relevant, using HMMs or statistical parsers
 - Learning usually supervised; may be partially unsupervised

Trainable IE systems

Pros

- Annotating text is simpler & faster than writing rules.
- Domain independent
- Domain experts don't need to be linguists or programmers.
- Learning algorithms ensure full coverage of examples.

Cons

- Hand-crafted systems perform better, especially at hard tasks.
- Training data might be expensive to acquire
- May need huge amount of training data
- Hand-writing rules isn't *that* hard!!

MUC: the genesis of IE

- DARPA funded significant efforts in IE in the early to mid 1990's.
- Message Understanding Conference (MUC) was an annual event/competition where results were presented.
- Focused on extracting information from news articles:
 - Terrorist events
 - Industrial joint ventures
 - Company management changes
- Information extraction of particular interest to the intelligence community (CIA, NSA).

Example of IE from FASTUS (1993)

Bridgestone Sports Co. said Friday it had set up a joint venture in Taiwan with a local concern and a Japanese trading house to produce golf clubs to be supplied to Japan.

The joint venture, Bridgestone Sports Taiwan Co., capitalized at 20 million new Taiwan dollars, will start production in January 1990 with production of 20,000 iron and “metal wood” clubs a month.

TIE-UP-1

Relationship: TIE-UP

Entities: “Bridgestone Sport Co.”

“a local concern”

“a Japanese trading house”

Joint Venture Company:

“Bridgestone Sports Taiwan Co.”

Activity: ACTIVITY-1

Amount: NT\$200000000

ACTIVITY-1

Activity: PRODUCTION

Company:

“Bridgestone Sports Taiwan Co.”

Product:

“iron and ‘metal wood’ clubs”

Start Date:

DURING: January 1990

Example of IE: FASTUS(1993)

Bridgestone Sports Co. said Friday it had set up a joint venture in Taiwan with a local concern and a Japanese trading house to produce golf clubs to be supplied to Japan.

The joint venture, Bridgestone Sports Taiwan Co., capitalized at 20 million new Taiwan dollars, will start production in January 1990 with production of 20,000 iron and “metal wood” clubs a month.

TIE-UP-1

Relationship: TIE-UP

Entities: “Bridgestone Sport Co.”

“a local concern”

“a Japanese trading house”

Joint Venture Company:

“Bridgestone Sports Taiwan Co.”

Activity: ACTIVITY-1

Amount: NT\$200000000

ACTIVITY-1

Activity: PRODUCTION

Company:

“Bridgestone Sports Taiwan Co.”

Product:

“iron and ‘metal wood’ clubs”

Start Date:

DURING: January 1990

Example of IE: FASTUS(1993): Resolving anaphora

Bridgestone Sports Co. said Friday it had set up a joint venture in Taiwan with a local concern and a Japanese trading house to produce golf clubs to be supplied to Japan.

The joint venture, Bridgestone Sports Taiwan Co., capitalized at 20 million new Taiwan dollars, will start production in January 1990 with production of 20,000 iron and “metal wood” clubs a month.

TIE-UP-1

Relationship: TIE-UP

Entities: “Bridgestone Sport Co.”

“a local concern”

“a Japanese trading house”

Joint Venture Company:

“Bridgestone Sports Taiwan Co.”

Activity: ACTIVITY-1

Amount: NT\$200000000

ACTIVITY-1

Activity: PRODUCTION

Company:

“Bridgestone Sports Taiwan Co.”

Product:

“iron and ‘metal wood’ clubs”

Start Date:

DURING: January 1990

FASTUS

Based on finite state automata (FSA) transductions

set up
new Taiwan dollars

1. Complex Words:


Recognition of multi-words and proper names

a Japanese trading house
had set up

2. Basic Phrases:

Simple noun groups, verb groups and particles

production of
20, 000 iron and
metal wood clubs



3. Complex phrases:

Complex noun groups and verb groups

[company]
[set up]
[Joint-Venture]
with
[company]




4. Domain Events:

Patterns for events of interest to the application
Basic templates are to be built.

5. Merging Structures:

Templates from different parts of the texts are merged if they provide information about the same entity or event.

Grep++ = Casacaded grepping

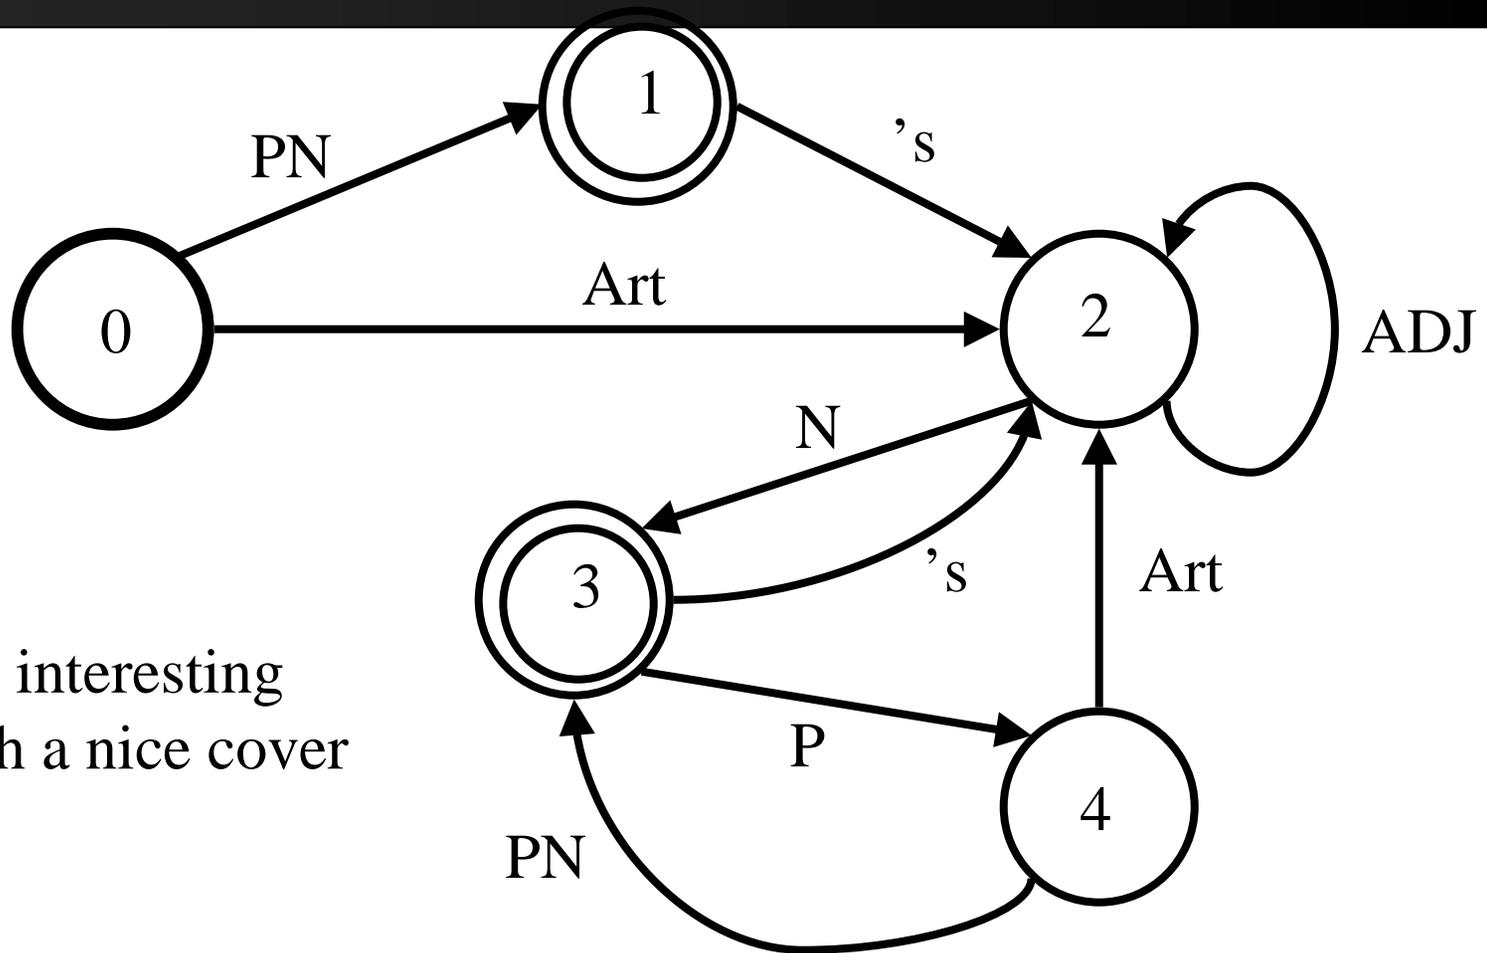


John's interesting
book with a nice cover

Pattern-matching

$\{PN \text{ 's} \mid \text{Art}\}(\text{ADJ})^* N (P \text{ Art} (\text{ADJ})^* N)^*$

PN 's (ADJ)* N P Art (ADJ)* N

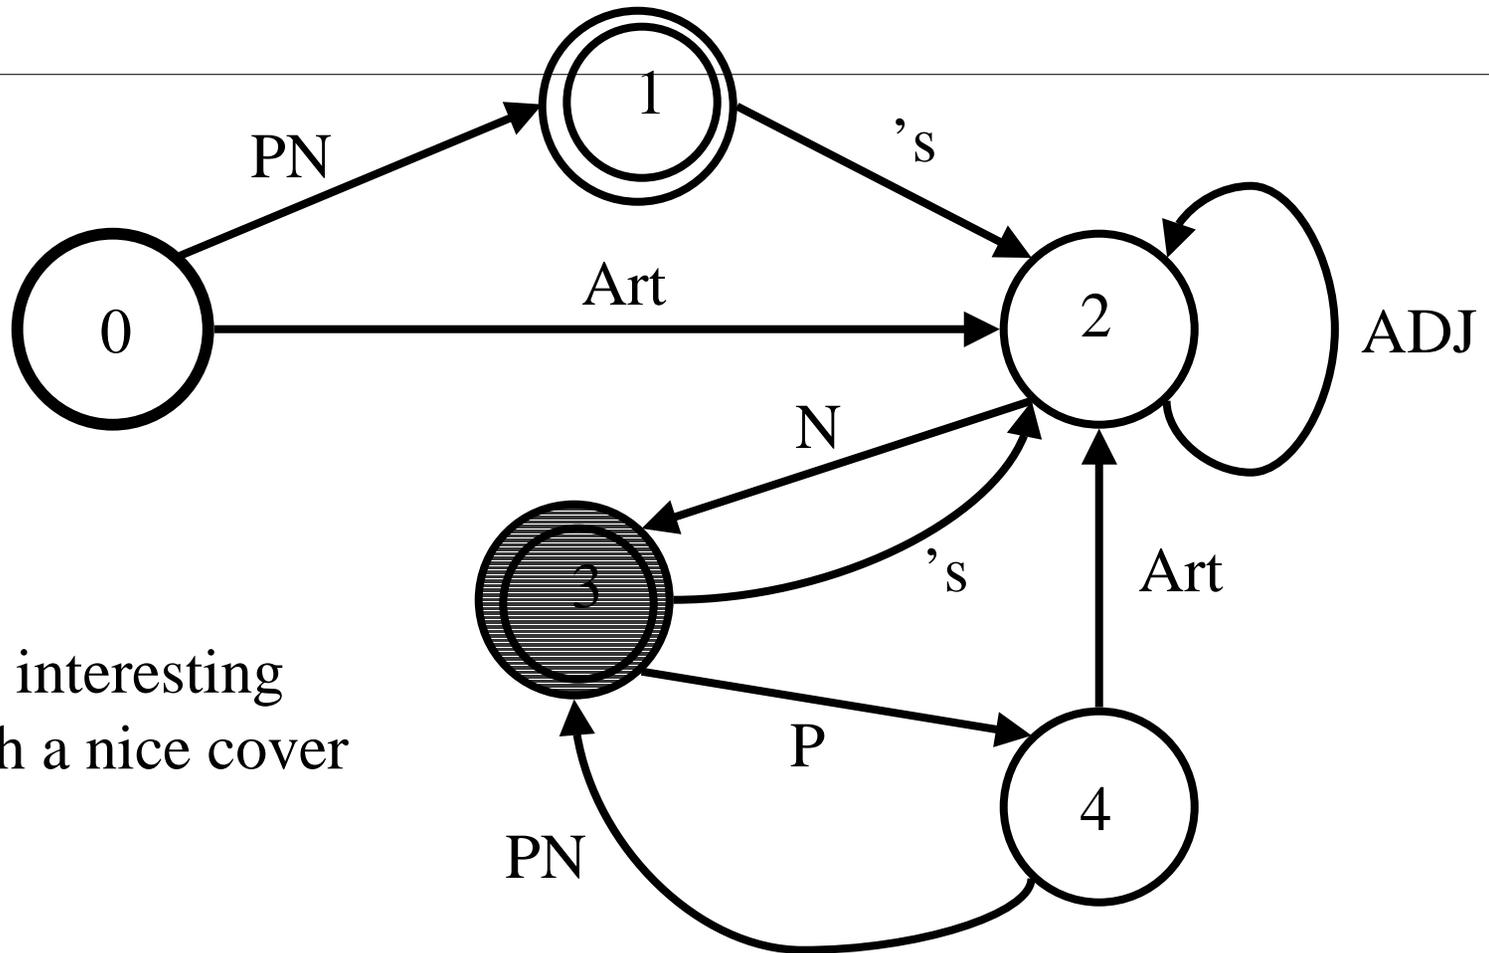

Example of IE: FASTUS(1993)

Bridgestone Sports Co. said Friday it had set up a joint venture in Taiwan with a local concern and a Japanese trading house to produce golf clubs to be supplied to Japan.

The joint venture, Bridgestone Sports Taiwan Co., capitalized at 20 million new Taiwan dollars, will start production in January 1990 with production of 20,000 “metal wood” clubs a month.

1. Complex words

Attachment
Ambiguities
are not made
explicit

2. Basic Phrases:

- Bridgestone Sports Co.: Company name
- said : Verb Group
- Friday : Noun Group
- it : Noun Group
- had set up : Verb Group
- a joint venture : Noun Group
- in : Preposition
- Taiwan : Location

Rule-based Extraction Examples

Determining which person holds what office in what organization

- [person] , [office] *of* [org]
 - Vuk Draskovic, leader of the Serbian Renewal Movement
- [org] (named, appointed, etc.) [person] P [office]
 - NATO appointed Wesley Clark as Commander in Chief

Determining where an organization is located


- [org] *in* [loc]
 - NATO headquarters in Brussels
- [org] [loc] (*division, branch, headquarters, etc.*)
 - KFOR Kosovo headquarters

Evaluating IE Accuracy

- Always evaluate performance on independent, manually-annotated test data not used during system development.
- Measure for each test document:
 - Total number of correct extractions in the solution template: N
 - Total number of slot/value pairs extracted by the system: E
 - Number of extracted slot/value pairs that are correct (i.e. in the solution template): C
- Compute average value of metrics adapted from IR:
 - Recall = C/N
 - Precision = C/E
 - F-Measure = Harmonic mean of recall and precision

← Note subtle difference

MUC Information Extraction: State of the Art c. 1997

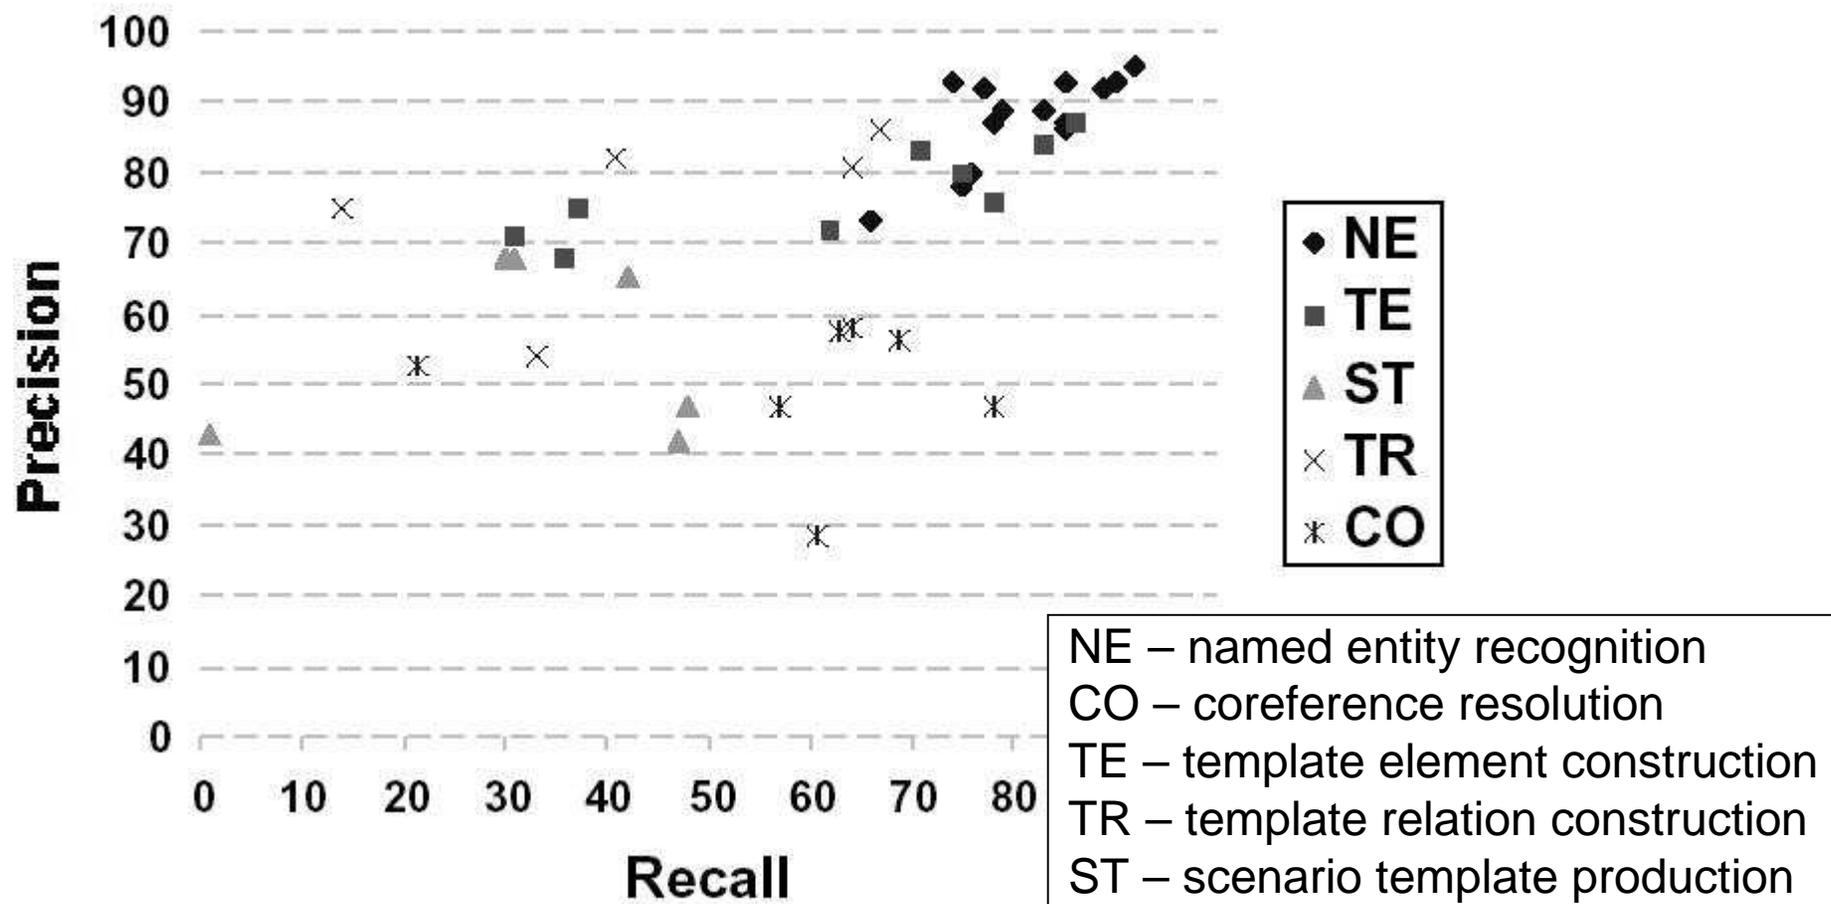

Summary and prelude

- We've looked at the "fragment extraction" task. Future?
 - Top-down semantic constraints (as well as syntax)?
 - Unified framework for extraction from regular & natural text? (BWI is one tiny step; Webfoot [Soderland 1999] is another.)
- Beyond fragment extraction:
 - Anaphora resolution, discourse processing, ...
 - Fragment extraction is good enough for many Web information services!
- Applications: What exactly is IE good for?
 - Is there a use for today's "60%" results?
 - Palmtop devices? – IE is valuable if screen is small
- Next time:
 - Learning methods for information extraction

Good Basic IE References

- Douglas E. Appelt and David Israel. 1999. Introduction to Information Extraction Technology. IJCAI 1999 Tutorial. <http://www.ai.sri.com/~appelt/ie-tutorial/>.
- Kushmerick, Weld, Doorenbos: **Wrapper Induction for Information Extraction**, IJCAI 1997. <http://www.cs.ucd.ie/staff/nick/>.
- Stephen Soderland: Learning Information Extraction Rules for Semi-Structured and Free Text. Machine Learning 34(1-3): 233-272 (1999)